SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class matter. Copyrighted, 1894, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXX.—No. 6. ESTABLISHED 1845. NEW YORK, FEBRUARY 10. 1894. $3.00 A YEAR. WEEKLY.

A CITY UNDER ONE ROOF—THE MASONIC TEMPLE.

The World's Columbian Exhibition may justly be said to have commemorated the quadricentennial of America, not only by the exhibition of the arts and industries of the globe, as brought together in the White city by the Lakes, not only by the lovely architecture and land- and water-scape there created, but by the city of Chicago proper, the worthy exponent of American progress and growth, the typical American metropolis. Of all the buildings of our Western sister Chicago, none is more remarkable than the Masonic Temple, a structure which, in its functions, dimensions and construction, is one of the unique buildings of the world. In spite of its name, it is proudly claimed to be the "highest commercial building in the world." In it we find exemplified the union of Freemasonry and commerce, a four and one-half million dollar building supplying beautiful halls and parlors for Masonic rites, as well as an unequaled collection of business offices.

The building is situated on the corner of Randolph and State Streets, in the heart of Chicago. It is constructed of granite, marble, steel and terra cotta as the principal materials of construction, and is fireproof throughout. From street level to apex it measures three hundred and two feet; this in absolute height of structure, not in the mere elevation of a lantern surmounting a dome. For one of the peculiar features of the building is its plainness and uniformity of design, the main features being repeated story after story until the sloping roof is reached. There is no tower or dome added simply to break the record. The building is just what it claims to be and no more.

The architects were Messrs. Burnham & Root, of Chicago, Mr. Burnham being widely known as Director General of Works of the Columbian Exposition. The street fronts are of dressed granite up to the sills of the fourth floor windows; above that they are of terra cotta and brick, matching in color the granite. The foundations are of concrete and steel, the latter being horizontal beams arranged to distribute the column loads, so that a uniform pressure of 3,500 lb. to the foot on the clay is produced. The building is of steel frame type, a method of construction now generally followed in large buildings.

The floor loads are sustained by steel columns; all of the building above the fourth floor is carried by steel columns, except for six piers, which are self-sustaining and support no additional load. Even the great arch in front has but a small load, a twenty-five ton girder running across it at the fourth floor level. Tension bracing, consisting of heavy steel rods, extends in two systems from top to bottom of the building in the direction of least width. The vertical columns are two stories in height, and alternate columns break joints.

The general dimensions are one hundred and seventy feet front and one hundred and thirteen feet depth. It is the front which appears in our illustration. The entrance is beneath a granite arch forty feet high and thirty-eight feet wide, and opens into a great rotunda, lined with Italian marble, and opening upward, through twenty stories. Ornamental iron staircases lead up from either side. Back of this great

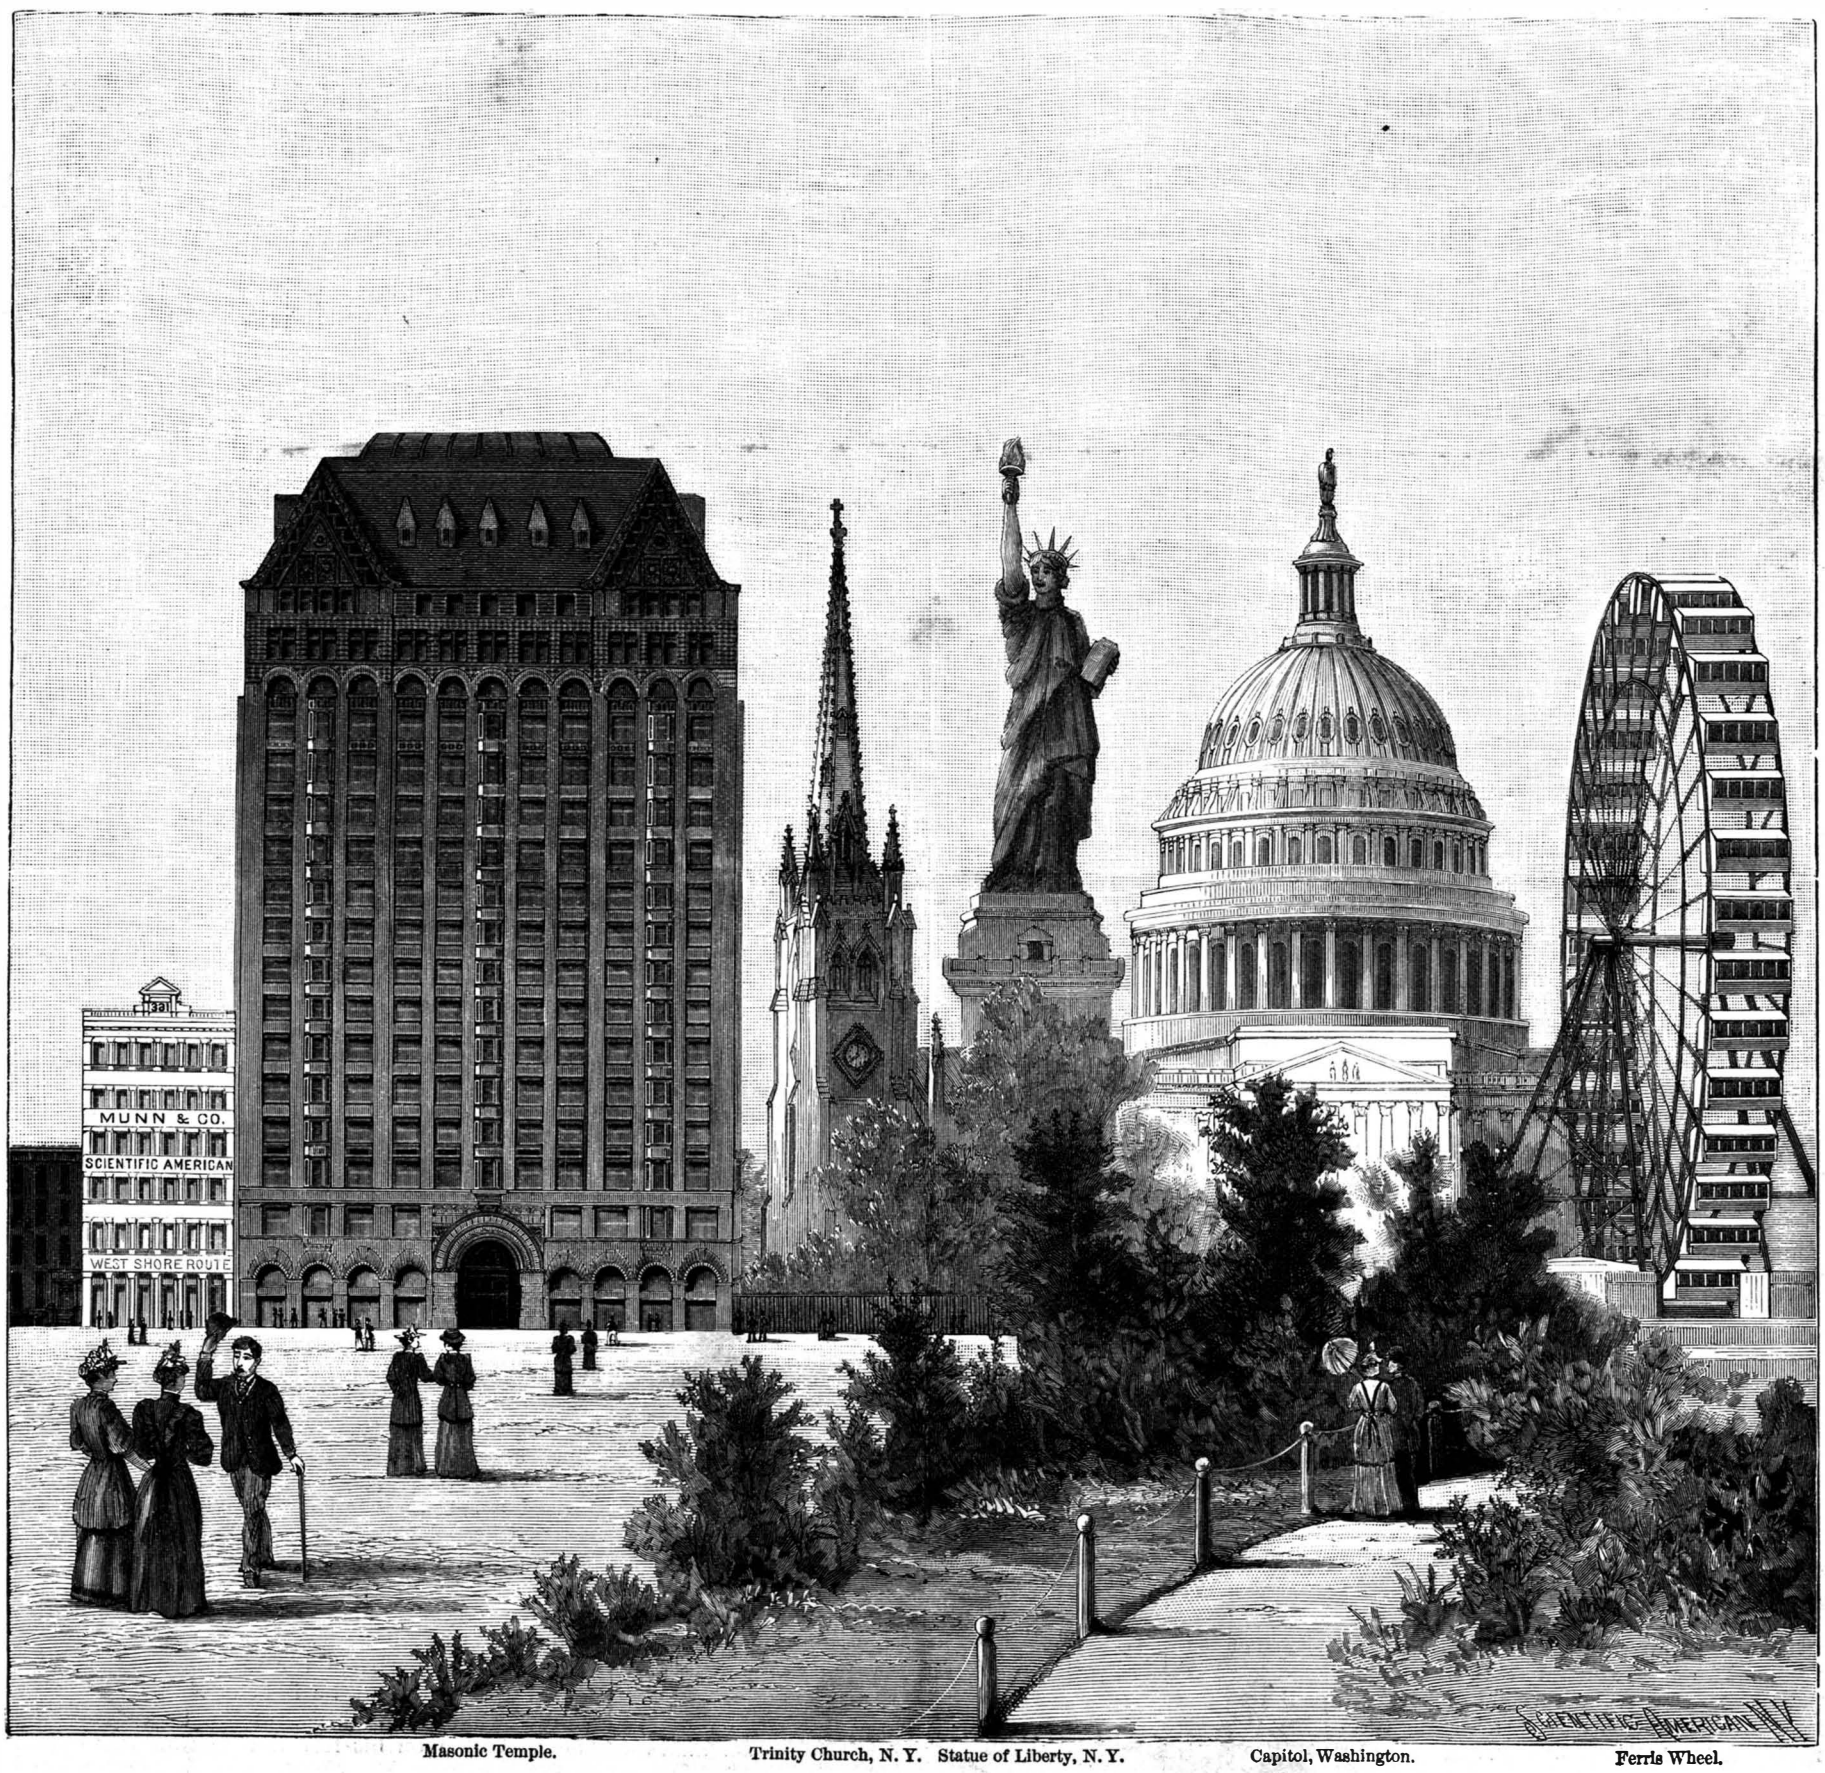

A CITY UNDER ONE ROOF—THE MASONIC TEMPLE, CHICAGO.

© 1894 SCIENTIFIC AMERICAN, INC.

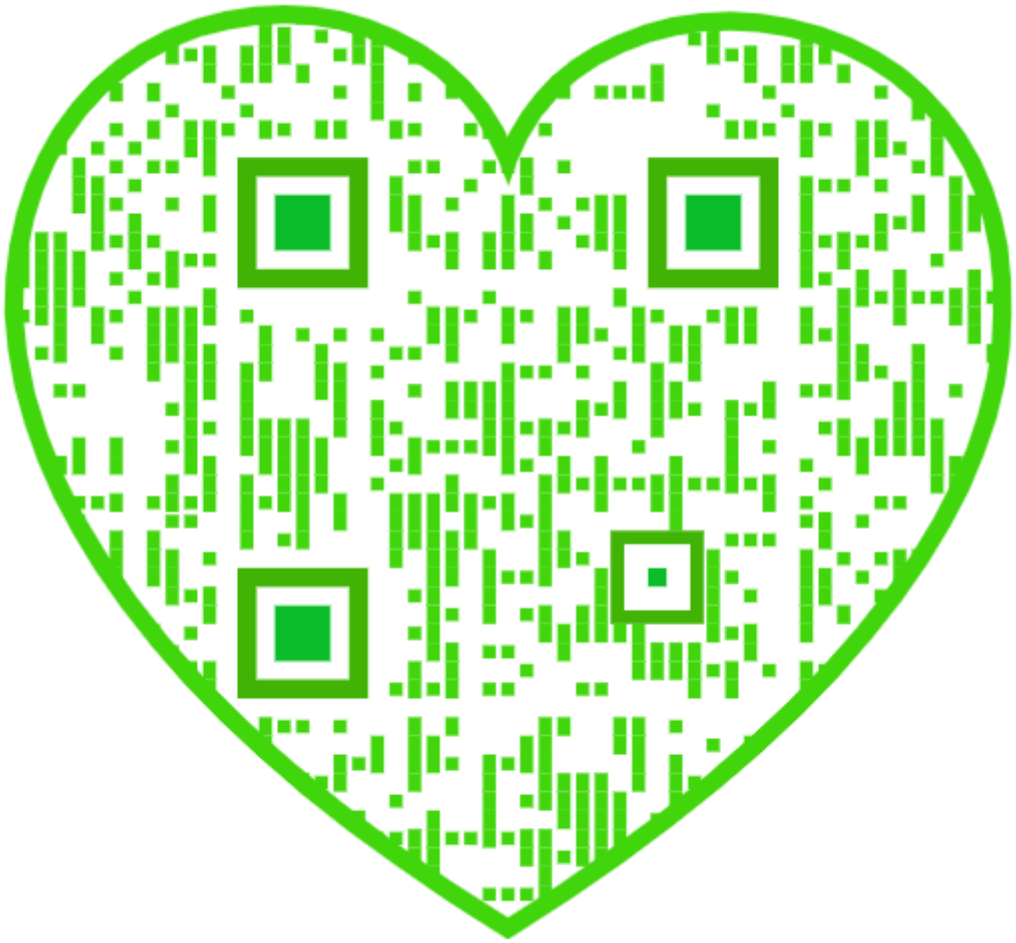

court is a sort of semicircle of elevators arranged like lights in a bay window. There are fourteen of these, lining an arc fifty feet deep and of seventy feet chord. The court is seventy feet each way, square in front and semicircular in the rear, the rear lines being determined by the elevator fronts.

The elevator plant is one of the features. Of the fourteen passenger elevators, seven are for express service only, not stopping below the tenth floor. The others stop at any floor desired. Owing to the great height of the building, the weight of the steel suspension cables became a serious problem, and was dealt with by counterweight chains attached to the bottom of each elevator and drawn up by it. These prevent any irregularity in the weight to be raised, due to difference of elevation, which, otherwise, would have been very great. The elevators run at a speed of nearly nine miles an hour, and ascend 258 feet. Allowing continuous ten hour service for each, their aggregate travel in one year would be over 123,000 miles. Thirty seconds is ample time for the full ascent. There are also two freight elevators. The wire ropes of the elevators aggregate sixteen miles in length.

The rotunda is surmounted by a glass roof 302 feet above its mosaic floor. The windows and balconies of the twenty stories open upon this shaft. The twenty-first story is properly the roof. It is a roof garden, and is devoted to purposes of observation, and may be used for commemorative or festival occasions. It forms a great platform, inclosed by walls and ceiling of glass, with oak panels, steam heated, and capable of accommodating 2,000 people at one time. It is the highest point of observation in the city, and gives grand views in all directions.

Around the rotunda galleries are carried for the first ten stories. Shops open on these galleries, with show windows, exactly as in a street. The stories from eleventh to sixteenth inclusive are for offices; the remainder are for Masonic uses. The general features of the court and balconies include mosaic floors, marble soffits or under surface of the balconies, alabaster-cased columns, bronze-finished hand rails and metal work, and marble-lined walls.

The water supply plant comprises pumps with a combined capacity of 2,000 to 3,800 gallons per minute. The pumping machinery circulates each day, if reckoned in gallons passed through the pipes, enough water to fill a reservoir 240 feet long, 100 feet wide and 50 feet deep. The roof tanks alone provide storage for 7,000 gallons. The cellar has still larger tanks of 18,500 gallons capacity.

Wrought iron pipes with screw joints are used for water supply and for sewage, all taking vertical courses and placed in special pipe chambers or pockets. Part of the drainage goes directly to the sewers; part is delivered to a tank in the basement, whence it is forced by steam ejector into the sewers.

For heating about 40,000 square feet of steam radiator surface on the overhead system is provided, and a sixteen inch steam pipe is used for their supply.

The electric light plant includes some 7,000 16 c. p. incandescent lamps, operated by six 1,000 lamp dynamos, the latter driven by high speed engines. Two sets of electric mains are carried through the building, all cross connected and of large size, to prevent any danger from heating. It is estimated that there are 53 miles of electric wires, and the weight of the rest of the electric plant has been put at 50 tons.

To allow for settling, the building was started a little above the proper street level. The settling was so accurately calculated that it is now at the proper level.

Our illustration is designed to show the great size of the building. On the right of the cut is seen the great Ferris wheel, 265 feet high, next comes the Capitol at Washington, 288 feet high, the Statue of Liberty in New York harbor, 301¼ feet from water level to the torch, then Trinity Church spire, 284 feet high, and then the Masonic Temple. To bring it within every day comparisons we show adjoining it a typical New York City fireproof, first-class office building, and next to that, on the extreme left, a four-story "brownstone front." It will be seen that the mammoth pile dwarfs everything shown.

The Silk-Spinning Spider.

The silk spider of Madagascar forms the subject of an interesting article in *Die Natur*, by Dr. Karl Muller. Its native name is Halabe, meaning great spider. This Halabe, or *Nephila Madagascariensis*, spins threads of a golden color and strong enough, according to Maindron, to hang a cork helmet by. The female spider may attain a length of 15 cm., while the male does not exceed 3 cm. A single female individual, at the breeding season, gave M. Camboue, a French missionary, some 3,000 m. of a fine silken thread during a period of about 27 days. The thread was examined with a view to creating a new industry. Specimens tested at a temperature of 17° C. showed an elongation of 12·48 per cent under a weight of 3·27 gr. Small textures woven of these threads are actually used by the natives for fastening flowers on sunshades and for other purposes.

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico.....$3 00
One copy, six months, for the U. S., Canada or Mexico..... 1 50
One copy,one year,to any foreign country belonging to Postal Union. 4 00
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for the U. S., Canada or Mexico. $6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country. See prospectus, last page.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to one address in U. S., Canada or Mexico, on receipt of *seven dollars*. To foreign countries within Postal Union, *eight dollars and fifty cents a year*.

Building Edition.

THE ARCHITECTS AND BUILDERS EDITION OF THE SCIENTIFIC AMERICAN is a large and splendid illustrated periodical, issued monthly, containing floor plans, perspective views, and sheets of constructive details, pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, $2.50 a year. To foreign Postal Union countries, $3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, to one address, $5.00 a year. To foreign Postal Union countries, $6.50 a year. Combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, $9.00 a year. To foreign Postal Union countries, $11.00 a year.

Spanish Edition of the Scientific American.

LA AMERICA CIENTIFICA E INDUSTRIAL (Spanish trade edition of the SCIENTIFIC AMERICAN) is published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number of *La America* is profusely illustrated. It is the finest scientific, industrial trade paper printed in the Spanish language. It circulates throughout Cuba, the West Indies, Mexico Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. $3.00 a year, post paid to any part of the world. Single copies 25 cents. See prospectus.

MUNN & CO., Publishers,
361 Broadway, New York.

☞ The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.

☞ Readers are specially requested to notify the publishers in case of any failure delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, FEBRUARY 10, 1894.

Contents.

(Illustrated articles are marked with an asterisk.)

Air pumps of the New York*..... 88
Alcoholic vapors, explosive (5760) 92
Aluminum surgical instruments.. 89
Battery cell, restoring 87
Boilers, cleaning of scale (5762)... 92
Books and publications, new..... 91
Brake, child's carriage, Boes'*.... 84
Breweries in the world..... 88
Building, a new sanitary..... 83
City under one roof, a*..... 81
Clapboard cutting without waste* 89
Concrete beams and floors..... 90
Drawing in general education..... 87
Duroline..... 87
Electrical inventions, recent ... 91
Electric circuit, multiple system (5775)*..... 92
Electric motor, reversing (5776)*. 92
Electric railways in Canada*..... 88
Engine brake, Cleveland's..... 83
Exhibition, Tasmanian, 1894-95.... 85
Fish with rubber corset, a..... 83
Forestry exhibits at Chicago*..... 89
Greenland expedition,the Nansen 88
Gun carriage, a disappearing..... 88
Haulage by horses..... 82
Heat, prickly..... 90
Ice machine, a sixty ton*..... 85
Inks, rubber stamp (5761)..... 92
Inventions recently patented..... 91
Lubricator for dynamos, Fawcett's*..... 84
Masonic temple, Chicago, the*... 81
Motormen..... 89
Nickel plating (5779)..... 93
Notes and queries..... 92
Patents granted,weekly record of 93
Progress and invention..... 83
Railroad development..... 83
Railway appliances, some new... 91
Railway, tubular, between Calais and Dover..... 86
Sanitary building..... 83
Screw plates for pipe*..... 84
Sled, a Swedish*..... 84
Spider, the silk spinning..... 82
Steamship, a lake passenger*. 90
Street lamp lighting, novel..... 84
Telephone, coin-in-the-slot..... 89
Trees, curious formations of*..... 89
Tunnel, the Borgalle..... 90
Wall paper, measuring for..... 87

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT

No. 945.

For the Week Ending February 10, 1894.

Price 10 cents. For sale by all newsdealers.

PAGE

I. AGRICULTURE.—Improved Hay Rake and Tedder.—Stoddard's hay rake and tedder as shown at the Chicago Exposition.—1 illustration..... 15099

II. ASTRONOMY.—Venus and Her Crescent.—An interesting contribution to popular astronomy..... 15110

III. BIOGRAPHY.—Miss Klumpke.—An American lady graduate doctor of science.—Her work in the Paris observatory.—1 illustration..... 15100

IV. CHEMISTRY.—Alloys.—By Prof. W. CHANDLER ROBERTS-AUSTEN.—Continuation of these remarkable papers treating of the thermic relations of alloys.—3 illustrations..... 15104
Boron Bronze.—By H. N. WARREN.—Composition and characteristics of this alloy..... 15103
Distillation Apparatus for the Separation of Alcohol from Mixtures.—An ingenious fractional condensation apparatus for laboratory use.—1 illustration..... 15102
Oil of Coprah and Palm Oil.—Chemical analysis of these oils... 15103
Potassium.—Notes on this alkali metal..... 15102

V. CIVIL ENGINEERING.—The Jetties at the Mouth of the Mississippi River.—A criticism of the work done for the improvement of the mouth of the Mississippi..... 15096

VI. ELECTRICAL ENGINEERING.—Electric cars introduced in Paris, driven by storage battery.—1 illustration..... 15099

VII. GEOGRAPHY.—The Hawaiian Islands.—A valuable article on this timely topic..... 15109

VIII. GEOLOGY.—Curious Mineral Formations.—Examples from California mines.—2 illustrations..... 15106

IX. MEDICINE AND HYGIENE.—Notes on the Treatment and Cure of Cancer.—By NICOLAS PIKE.—A new treatment for cancer by inoculation with erysipelas..... 15100
The Dangerous Employment Inquiry.—Unhealthy employments as investigated by an English departmental committee..... 15101

X. METEOROLOGY.—Dust and Atmospheric Phenomena.—By Dr. J. G. MCPHERSON.—A valuable and practical paper on Mr. Aitken's recent investigations..... 15110

XI. MINING ENGINEERING.—The Formenephone for the Musical Analysis of Gases.—A curious and ingenious apparatus for the detection of fire damp in mines.—2 illustrations..... 15103

XII. MISCELLANEOUS.—An Experiment with the Scouring Rush.—How to obtain the siliceous skeleton of this plant..... 15110
A Perpetual Motion of the Eighteenth Century.—A curiosity in the history of science.—1 illustration..... 15099
Fumigation with Bisulphide of Carbon.—By H. DU BUYSSON.—The use of bisulphide for destruction of insect life..... 15101
Italian Method to Keep Warm.—The curiosity in the household economy of Italy.—1 illustration..... 15106
The History of Footgear.—Continuation of this paper.—25 illustrations..... 15107
The Talking Watch.—An excellent trick in magic.—2 illustrations..... 15106

XIII. NATURAL HISTORY.—What we Know of the Lobster.—By FRED. MATHER.—A graphic and accurate paper on this crustacean..... 15107

XIV. NAVAL ENGINEERING.—The United States War Ship Columbia.—A full description of the great American war ship, with illustrations.—3 illustrations..... 15095

XV. PHOTOGRAPHY.—Photographic Apparatus for Facilitating Focusing.—A simple and effectual reversing apparatus for focusing.—1 illustration..... 15100

XVI. PHYSICS.—Formation of Snow in Bright Sunshine.—Exceedingly pretty experiment in thermo-dynamics.—1 illustration..... 15102
Studies of the Phenomena of Simultaneous Contrast Color; and on a Photometer for Measuring the Intensities of Lights of Different Colors.—By ALFRED M. MAYER.—The practical application in photometry of the principles explained in these papers.—6 illustrations..... 15105

XVII. TECHNOLOGY.—Marshall's Paper Pulp Finisher.—A new type of machine for working paper pulp.—3 illustrations..... 15098
Vegetable Parchment—Its Properties, Uses, and Manufacture.—A valuable and practical paper on this interesting subject..... 15097

HAULAGE BY HORSES.

Mr. T. H. Brigg, who has spent the better years of his life in the investigation of the fundamental principles of economic haulage by horses, read an instructive paper on this subject at the World's Engineering Congress, in Chicago, last July. The question discussed by Mr. Brigg is one which, from a financial, humane, scientific or civilized point of view, affects the commercial interests, comfort and well-being of every civilized country in the world, and which, notwithstanding its apparent simplicity, must be approached by scientific methods. While man, says the author, is continually devising methods to lighten his own labors by substituting the forces of nature for his own strength, the horse is required to bear his burdens and haul his loads under the same disadvantages that have hampered him in the past. Much attention has been paid to the development of speed in horses, and the result has been a vast improvement in their strength, beauty and speed; but the animals are still so handicapped by the unscientific methods under which they are required to labor that there is an absolute loss, in many cases, of fifty per cent of their strength.

The amount of resistance that a horse can overcome depends upon his own weight, his grip, his height and length, the direction of the trace and his muscular development, which determines the power to straighten the bent lever represented by his body and hind legs against the two resistances—the vehicle, through the trace attached to the shoulder, and the hind feet against the ground. Many erroneous notions exist as to the best inclination of the trace for the horse. For instance, if a horse can haul a given load up a given hill with a deep inclination of trace and cannot do so with a horizontal one, it is generally thought that the former is the better angle. It is, indeed, for that particular hill, but when once the latter is surmounted it becomes a very bad angle, inasmuch as it involves a great loss of power. To pull through a low trace, or to have a man, or even two or three men, on a horse's back, is advisable, and even necessary, if a horse is expected to haul a load requiring the full force of his muscles at any particular moment, and for the moment, under such conditions, he would be able to draw a much greater load than without the added weight; but any one can see that the animal could not travel far with any vehicle if he had to carry three men on his back in addition to hauling his load. It is utterly impossible, says Mr. Brigg, for a horse to pull through a permanently oblique trace, or through shafts, such as are so commonly used in America, without the animal being compelled to carry a part of the vehicle, just as effectually and with the same extravagant and painful result as sedan chair carriers experience in carrying their loads.

The question has been asked, Should the horse support the vehicle, or the vehicle the horse? The lighter the load, says Mr. Brigg, the more the vehicle ought to support the horse. When, however, the load increases, the horse ought gradually to lose that support until, with a very excessive load, he ought to support a part of the vehicle itself. If the load is heavy and difficult to move and the horse is compelled to make a horizontal thrust, without increasing his grip and mechanical conditions, it fails. But, if the conditions remove some of the weight from the load and place that on the horse, it is equal to allowing the thrust to be an obliquely upper one. Again, a load that a horse can draw up any ordinary gradient should never require the horse to support either any part of the vehicle or the load on a hard level road.

Human beings are constantly moving, resting first on one foot and then on the other in search of relief. Generally, they can sit down, but horses cannot do so without being smartly beaten for their effort to relieve themselves. For generation after generation, we have kept on yoking horses by methods that compel them, in the shafts of a four-wheeled wagon, to rest their entire weight on their feet. It is not realized that a horse exerts from ten to a hundred times more force and expends that much more energy in transporting himself from place to place than in hauling a two-ton load on fairly good roads. The horse is compelled, absolutely unnecessarily, to exert himself under conditions such as no engineer in the world would for a moment think of applying to the steam horse, under which to waste its energies and knock itself to pieces in practically no time.

The result of Mr. Brigg's investigations is that, having ascertained the fundamental and economic principles involved in the haulage of vehicles, and the transportation of living or inanimate matter, he has devised a special contrivance applicable to all kinds of four-wheeled vehicles or sleighs, which he claims will, at all times, automatically afford the horse all possible assistance. It does not matter whether he be traveling on smooth, level roads, up hill or down, with a heavy or a light load, he cannot fail to receive a direct advantage from the very moment he is attached to the moment he is detached. The relief is afforded while he is walking, running or even standing. The percussion on his feet is reduced at every stride during the day. His muscles are less strained, his

© 1894 SCIENTIFIC AMERICAN, INC.

energy is economized as one would economize the energy of a locomotive, and his legs and feet are saved from an enormous amount of battering, which proves so fatal on all conditions of road.

In an experiment tried before his audience with his invention, which was exhibited at the World's Fair, at Chicago, Mr. Brigg used a two-seated wagon with ordinary shafts. From the latter a line was carried back seven feet to a small platform bearing a chair on which was seated a man of middle weight. Two people climbed into the seats of the wagon. A strong, heavy man now tried to haul the affair, but failed. The automatic appliance was then attached to the shafts and the wagon was hauled easily, notwithstanding a second man had taken his position on the platform drag. The hauler had been relieved of part of his weight, and the strength in his pull had been added to that much.

PROGRESS AND INVENTION.

In the course of his remarks recently upon the part that had been played by the American inventor in the development of the country, the Hon. Thomas Reed among other things said: "To hear the discussions in Congress you would suppose that invention dropped from Heaven like manna to the Jews. You would suppose that James Watt reached out into the darkness and pulled back a steam engine. It was not so. All invention is the product of necessities and of pressure. When the boy who wanted to go off to play, so rigged the stop-cocks that the engine went itself, he was not only a true inventor, but he had the same motive—his personal advantage—that all inventors have, and, like them, it was urged on him by business necessities. What originated Bessemer steel? Sir Henry Bessemer? No; but the necessities of railroads, which would, every one of them, have been bankrupt without steel rails. If Sir Henry had not invented the process, somebody else would. It detracts not one iota from the fame of Alexander Bell that a dozen men were close on his track. It has been so in every great invention. I say, therefore, that it was the diversification of our industries that stimulated inventions. Otherwise all the inventive power of America would have run to waste; and when a man calculates the wonders of American inventive genius, he knows where some of our wealth comes from.

"As a further proof that invention is born of necessity, tell me why great inventions never come until the world is in such shape as to enjoy them? What would the Crusaders have done with railroads? There was not money enough in the world, or travel, or merchandise to keep them going a week."

A New Sanitary Building.

Dr. W. Van der Heyden, of Yokohama, Japan, in a recently published pamphlet, describes a sanitary building devised by him, which he has occupied for a year, and in which he believes that he has solved the twofold problem of the construction of a dwelling for use in both arctic and tropical climates. The new structure is composed of glass boxes filled with a solution of alum and made air and water tight. The application of glass for building purposes is not altogether new, however, since hollow glass bricks have already been made and houses built of them.

The boxes employed by Dr. Van der Heyden are formed of two panes of 4-10 inch thick glass, fixed in cast iron frames that are screwed together. These boxes, which have thus far resisted the influence of cold and heat, shocks and earthquakes, rest upon cast iron supports. The necessary gaps between two rows are filled with felt and then covered with boards. The series of boxes above each other and next to one another, with as little space between them as possible, and such space filled with felt, form the external walls of the house. The roof, which is flat and is supported by the cast iron pillars that carry the boxes, can be made in exactly the same mould.

In the house under consideration, glass panes pressed against each other, but with strips of rubber between them, form the horizontal ceiling. Above this there rests a thick layer of ashes, upon which there is a light framework of wood, covered over with cement. This, of course, renders the roof non-translucent, but it defends the room well against the radiant heat, and, being made of bad conducting material, the heat of the interior is not lost. As the four walls are totally translucent, there is more light than in any other description of dwelling.

A house built in such a way is an entirely closed hollow space, without windows or doors. As there are no openings and no fissures, it is practically impermeable to air, moisture, heat, cold, dust, microbes and insects. Since the panes are of rough plate glass, objects within the inclosure cannot be seen from the outside. At convenient places, some may be replaced by transparent glass to serve as windows giving a view of the exterior. Doors are not needed, since the entrance can be made through the floor by means of a staircase from an underground room, which receives no direct light from the sun. The walls of this room are made of ordinary bricks, plastered inside and protected outside by a thick layer of clay to exclude moisture. The light is admitted through glass boxes set into the four corners of the ceiling, which forms the floor of the room above. This floor is made of double planks, with a thick layer of sawdust between them. The planks facing the upper room are painted and varnished, but may be saturated with paraffine. Those facing the under room are plastered, as are also the walls. There is a mild, diffused light in the lower room, sufficient to read by. At night, both compartments are lighted by electric lamps.

As in winter the solution in the glass boxes might freeze, and would certainly do so in cold countries when the temperature falls to —18° C., a covering of ordinary glass set in wooden frames surrounds the whole building, so as to form an envelope of air, which is a very bad conductor of heat. This air space can be easily warmed if required. In the summer of moderate climates, and all the year round in tropical ones, the same glass window frames are put within the house, so as to shut off the heat by means of these badly conducting air cushions. The dwelling is entered from the exterior through a staircase leading to a corridor that communicates with the subterranean room, and that can be closed by doors, so as to let in as little cold or heat as possible while a person is entering.

Between the walls and the ceiling, there is a space leading outside to a belt covered with window glass and partially surrounding the building. From this external air space a tube leads to a stove (which stands out of doors) and conveys the air directly under the grate. There is thus a constant withdrawal of air from the house as long as the fire burns. This vitiated air is replaced by pure air that has been warmed in passing through tubes placed around the pipes that carry the heated gases from the furnace to the chimney. This air, before entering the heating space, comes from the lower room, where it has already taken the temperature of the surrounding earth. The heated air rises in a tube laid under the ceiling of the lower room and escapes through openings in the floor of the upper room. The temperature of the air is controlled by valves.

In the summer of moderate climates, and always in the tropics, the renewal of the air is effected in a different way. The vitiated part escapes, as in winter, near the ceiling. From there it enters a prismatic chamber of wood and glass, which is carefully closed in winter by a wooden cover, but is left open in summer. This apparatus, which Dr. Van der Heyden calls a "sun belt," performs the functions of a stove, in causing a useful draught, through the heating of the inclosed air by the solar rays. The expanded air, in rising and escaping freely at the top, is followed by the denser air from the room. The arrangement acts automatically when the sun shines. When it rains, the more the rain and the harder it falls, the greater the draught, while every slight movement in the external air promotes the withdrawal of air from the sun belt and house.

In a hygienic building, it is of great importance to have the fresh air constantly entering the apartments free from dust and microbes. This result is obtained as follows: Both in winter and summer, the air for ventilation is taken from the cellar room. The air to replace this enters through a large glazed earthenware pipe or a plaster-lined brick tunnel extending underground to a distance from the house, and then rising vertically to some height above the surface and opening in the free air. It is here covered with wire gauze to filter the air from insects and rough particles, and is sheltered from direct sunshine by a wooden roof. In the opening that communicates with the lower part of the cellar room there is placed a wire cage filled with loose cotton, which filters the air from the finest particles of dust and from microbes. In front of this cage is placed a pane of glass covered with glycerine or moist glue. The air coming from the pipe strikes this surface, leaves thereon the microbes that may have passed through the cotton, and then expands in the interior of the room. The rooms of such a building are thus made as aseptic as a wound-dressing of Lister.

Dr. Van der Heyden, believing that the air of one's neighbors ought not to be vitiated by allowing the air leaving the house to carry with it bacteria, or poisonous gases due to the expiration of the inmates, purifies the air of his building more fully by having curtains stretched under the ceiling with woolen tassels attached to them by hooks and eyes. Into some of these tassels a strong alkali and into others Nestle's reagent is drawn by capillarity. The air, striking along the ceiling before it leaves the cornice openings, deposits there its carbonic acid and its organic alkaloids, besides the greater part of the dust that may have collected. In this manner an endeavor is made to have the air that leaves the house as pure as it was forced to be on entering.

The wash and kitchen water is rendered innocuous, before it is allowed to enter the drains, by passing it through an unglazed chinaware filter, on the principle of that of Chamberland, but differing in construction. On the same principle of not allowing any matter containing infection to remain in the house or to leave it undestroyed, the water closet used is so constructed as to permit of the quick oxidation of the urine, fæces, sputa and other refuse through the action of sulphuric acid and nitrate of soda. Different organic salts are the result, all the organic matter is destroyed, and nothing that is of great value as a fertilizer is lost.

Railroad Development.

To complete the Transandine Railway, which would give uninterrupted communication between points in Chile and Buenos Ayres, the capital of the Argentine Republic, it is necessary to build only 33 kilometers (20½ miles), as trains can now run over 1,189 kilometers out of a total of 1,222 miles. The Argentine section is nearly completed as far as Puenta del Inca, so that in 1894 there will remain to be constructed 15 kilometers, including two tunnels at the summit. Work on this remnant of the Argentine section will be commenced as soon as the line on the Chilean side is sufficiently far advanced to permit the work being prosecuted in such a manner that the two sections—the Argentine and the Chilean—shall be finished at the same time. Thus, the only obstacle to the completion of the road has been the lack of satisfactory arrangements for constructing the Chilean section. The contractors, John and Matthew Clark, having found it impossible to raise money for this link under the guarantee of the Chilean government, asked the Chilean congress to increase the guarantee from 4 to 5 per cent, and this having been done, it is said there will be no difficulty in completing the road.

The Chilean congress has granted a concession for a railway to connect the Southern Line of Chile with the Argentine Great Western, at La Paz. The road will be mostly in Argentine territory, namely, 175 miles from La Paz to the Andine pass of Tinquiririca and 75 miles further to a point on the main trunk Southern Railway, between San Fernando and Curico. The road is expected to be of special use for the valuable cattle trade across the southern passes of the Andes into Chile.

From a report by Mr. C. C. Mallet, British consul at Panama, it appears that steady progress is being made in the construction of the important railway from Cartagena to Calamar, on the Magdalena River, in Colombia. The concession for this road was obtained in 1889 by Mr. S. B. McConnico, representing some American capitalists. The funds for the enterprise were raised in the United States, but work was delayed for nearly three years, because of the difficulty experienced in securing an amount sufficient to complete the road. Construction was commenced in June, 1892, and one year later, June 15, 1893, the first section of the railway, from Cartagena to Turbaco, a distance of 14 miles, was formally opened. The next section, to Arjona, 8 miles, was to have been opened in October, and it is expected that the road will be completed to Calamar by June, 1894. At the time of Consul Mallet's report, in September last, 1,800 men were at work on the road. The road is being built with care and is equipped with the best American cars and locomotives. The distance from Cartagena to Calamar is 65 miles. Most of the land adjacent to the line is suitable for fruit culture and cacao. The trade from the upper Magdalena, a large part of which, it is hoped, will be diverted to the port of Cartagena, is expected to give the road substantial profits.

A Fish with a Rubber Corset.

Forest and Stream speaks of a curious find in the Cape Ann fish market, at Gloucester, Mass. It was nothing less than a mackerel with a rubber band around the body. The band had been put on the fish when quite small, and stayed there in spite of the rapid growth of the wearer. The fish's body under the band did not grow, which caused a depression in the full-grown body of about three inches in depth. The depression was covered with a healthy skin in no way unlike that on the rest of the body. The fish measured in length fourteen inches, diameter of body each side of the depression, seven and three-fourths inches, diameter of depression, five inches. The fish was undoubtedly in a healthy condition, and the band was sound and could be stretched like any other band.

Cleveland's Portable Engine Brake.

In describing this improvement, in our issue of December 16 last, it was inadvertently stated that the brake might be applied to a portable engine "for braking purposes on reaching a down grade." The brake is not intended for such use, but to prevent oscillation of the engine when driving machinery. The illustration clearly indicated its thorough effectiveness for the latter purpose, the simplicity of its application, and the readiness with which the chains could be tightened to lock the wheels immovably, no matter how severe might be the work the engine was called upon to do. The device is strong and durable, and may be stored on the engine when not in use. The improvement was recently patented by Mr. E. W. Cleveland, of Rounthwaite, Manitoba, Canada.

© 1894 SCIENTIFIC AMERICAN, INC.

SCREW PLATES FOR PIPE.

The particular superiority of this screw plate over others lies in its having its dies ready for use in their holders without the trouble and delay of changing and setting them. They are as simple in use as solid dies and at the same time they are readily ground when dull; are capable of being adjusted so as to take irregular sized fittings, etc., and are of the very highest

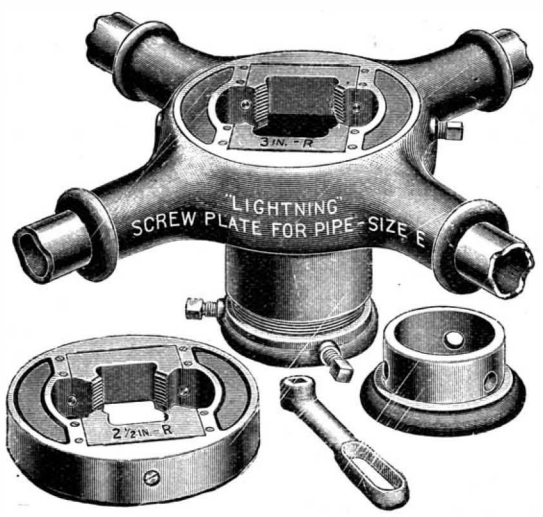

"LIGHTNING" SCREW PLATES FOR PIPE.

quality as to material and finish. They are manufactured by the Wiley & Russell Manufacturing Company, of Greenfield, Mass.

A SWEDISH SLED—THE SPARKSTOTTING.

The *sparkstotting* is an exceedingly light sled that the inhabitants of Norrland, a province situated at the north of Sweden, employ during the winter as a means of locomotion. The use of it now extends throughout entire Sweden, where races upon this original vehicle constitute one of the most highly appreciated sports of winter. Among other people of the North, in Russia, Scotland, Germany, this sport is entirely unknown—a fact that is somewhat extraordinary, seeing that the sparkstotting can be employed in all countries in which the rigors of winter permit of the use of ordinary sleds.

The sparkstotting is constructed entirely of Norway spruce. It is straight, of elongated form and weighs no more than 30 pounds. It consists of two runners, curved upward in front, and 6½ feet in length. To each of the runners is fixed an upright that serves both as a point of support and a tiller. The entire affair is connected by two or three cross-pieces, one of which supports a light seat placed at

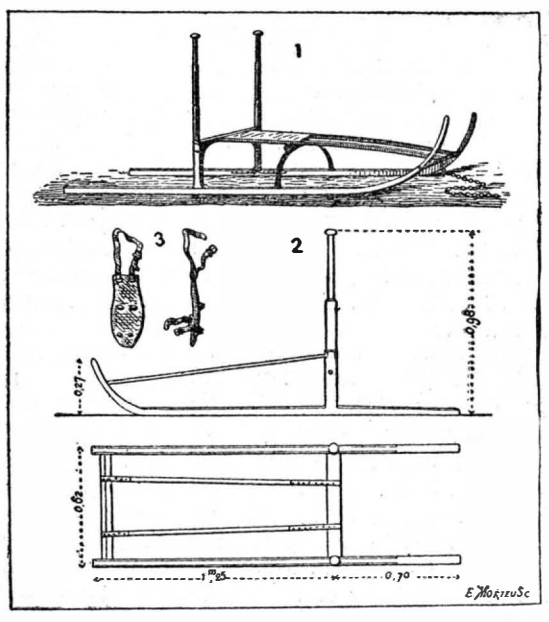

Fig. 1.—THE SPARKSTOTTING OF SWEDEN.

1. General view. 2. The Sparkstotting of Norway—section and plan. 3. Shoe calks.

Fig. 2.—METHOD OF USING THE SPARKSTOTTING.

12 inches above the surface. Fig. 1, No. 1, represents a type of sparkstotting in use in Norrland.

It differs perceptibly from the Vesterbotten type, in which the runners, which are much shorter, are not shod with iron, but are well greased or impregnated with boiling tar. The lightest and best type for racing is the one manufactured at Umea in Norway. The dimensions are given in No. 2 of Fig. 1. In order to push the sparkstotting, the racer, bearing with both hands upon the extremities of the uprights, places his left foot upon the runner to the left, and then, with the right foot, strikes the ground at regular intervals, so as to propel the sled forward (Fig. 2). If the snow is very hard and the racer is not provided with spiked shoes, it is necessary for him to fix steel calks to the soles (Fig. 1, No. 3). In recent times a horizontal bar, breast high, has been placed between the uprights. This modification renders the steering easier, and, besides, permits of governing with a single hand. Upon a level route the sparkstotting reaches a pretty good speed without great effort. An experienced racer, when the snow is in good condition, can easily attain the speed of a horse on a trot. In ascents, it is necessary to push the sparkstotting or to drag it, but this does not cause much fatigue, seeing its lightness and the feeble surface in contact with the snow.

With this sled it is possible to run very long races, provided the snow is sufficiently compact. It is stated that an experienced racer made the distance that separates Tornea from Pitea in 24 hours, and which is estimated at 21 Swedish leagues (125 miles). A groom who had been sent by his master to look for a horse traveled from Umea to Sundswall (180 miles) in three days, his sled being loaded with a valise.

The sparkstotting is the favorite vehicle of the laborers and peasants of Norrland, since it permits them to get over the ground quickly and cheaply. It is to the population of the north of Sweden what the horse is to the Cossack and Arab.

In certain regiments of the Swedish army an endeavor has been made to employ this sled for scouting service. Each of the soldiers sent upon a reconnoissance is provided with a sparkstotting, upon which he places his gun and equipment. It appears that the experiments have given satisfactory results.

At Stockholm and in southern Sweden the sparkstotting is considered rather as a sporting instrument, the use of which is tending to become more and more widespread among the young people. Why might not this new sport be tried in those departments of France in which snow covers the roads for several months and entirely prevents bicycle racing? Why, when winter has arrived and their machines have been stored away, might not our young bicyclists adopt this light sled with which it is so pleasant to run over frozen roads? It is not difficult to learn how to use it, and no falls are to be feared. Moreover, a detail that has its importance, this "winter bicycle," as the Swedes call it, has the advantage of being cheap and easily constructed.—*La Nature.*

A LUBRICATOR AND WIPER FOR THE COMMUTATORS OF DYNAMOS.

This improvement is applicable to any electric motor, wiping the commutators with a swab and applying just the little oil necessary as frequently as desired, after the same manner as a swab would be applied by hand. It has been patented by Mr. Lindley Fawcett, of Eureka, Cal. Fig. 1 shows the application of the improvement, Fig. 2 showing a portion of the apparatus in section. Extending upward from the box in which the armature shaft is journaled are the usual oil tubes, on which is held a plate supporting a portion of the apparatus. Projecting from one side of this plate, and parellel with the armature shaft, is a stationary shaft on which is a loose sleeve carrying a swab holder, provided with parallel plates or slats of wood, over each of which a cover of suitable absorbent fabric is secured by means of an adjustable bail or clamping frame. Endless canvas strips may be used for such covers, the strips being moved on the slats as portions are worn, until almost the entire surface of the cloth is worn out. Clamped to one end of the sleeve is a handle lever, normally held by a spring in such position as to keep the swabs in contact with the commutators, while an opposite extension of the lever is connected with a pitman pivoted at its upper end to a horizontal lever. This lever at its other end is pivoted on a stud, and the lever has a roller which rolls on a cam on a short transverse shaft, giving an up and down movement to the pitman, in combination with the spring connected to the handle lever, and correspondingly raising and lowering the swabs, for the application of the oil at the proper intervals. To move the swabs laterally, a crank arm carrying a two-winged cam, as shown in the sectional view, is secured on the transverse shaft, this cam contacting with a roller on a swinging lever whose lower end is connected by a pitman with an arm on the swab-holding sleeve, a spring combining with the cam motion to move the sleeve in and out, at each revolution of the shaft, so that every portion of the commutators will be touched by the swabs. The transverse shaft is driven by a worm wheel meshing with a screw on a horizontal shaft on whose outer end is a pulley connected by a belt with the armature shaft, although other speed-reducing gear may be employed as desired. When the swabs are to be changed, or other work done on the holder, the handle lever is

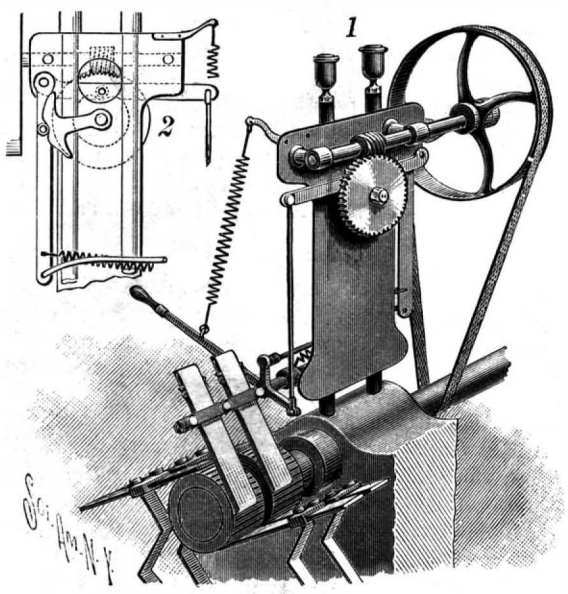

FAWCETT'S LUBRICATOR FOR COMMUTATOR.

depressed, and may readily be fastened down with a cord. The inventor of this apparatus has for years had charge of electric light works, and the improvement was devised by him to prevent the cutting of the commutators and wearing of the brushes, for which it is said to work admirably.

A NOVEL method of street lamp lighting is being introduced by the Cutter-Hammer Manufacturing Company, of Chicago. Each lamp post is fitted with two sal-ammoniac batteries, and a spark coil placed in an iron box at the foot of the lamp. In the lantern a miniature gas holder of about 2 cubic inches capacity is pivoted on a hinge and held down by weights. Directly over this is an automatic gas lighter, of the ordinary pattern, connected with the cells aforementioned by wires. To light the lamps of a city it is only necessary to open a valve connecting one of the large gas holders of the works with the mains. This causes a rise of pressure in the mains, in consequence of which the miniature holders, fitted in each lantern, rise about ⅛ inch against a platinum stop, and complete the battery circuit, thus putting the automatic lighter in action and lighting the lamp.

BRAKE FOR CHILDREN'S CARRIAGES.

This is a simple form of brake, applicable to any style of carriage that is pushed along by means of the handle bar at the rear. The improvement has been patented by Mr. Frederick O. Boës, of No. 1591 First Avenue, New York City. It consists of a bar adapted for engagement with the tires of the rear wheels, the bar being roughened or covered with leather or other suitable material at the places of contact, and being attached to the handle bars by short pivoted links. This pivotal connection is such that when the brake bar is in its lower position it rests

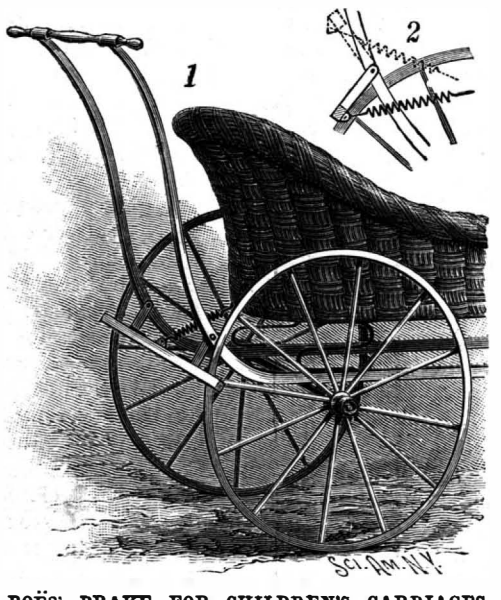

BOËS' BRAKE FOR CHILDREN'S CARRIAGES.

against the wheel tires, as shown in full lines in Fig. 2, being removed from contact therewith when not required for use by being thrown upward, as indicated by the dotted lines. The bar is held in either of the two positions in which it may be placed by a spring extending centrally from the bar to the back of the carriage.

© 1894 SCIENTIFIC AMERICAN, INC.

The Tasmanian Exhibition of 1894-1895.

Far in the antipodes, in Hobart, Tasmania, under the auspices of the Tasmanian government, is to be opened an international exhibition of arts and industries. The colony of Tasmania has a population of 150,000, and the neighboring colonies contributing to the affair make a total of over 4,000,000 of inhabitants. The site for the buildings, about eleven acres in extent, has been granted by the government.

The period for the exhibition comprises the Tasmanian summer, some six months, from November, 1894, being chosen. The ground plan of the buildings shows an irregular triangle, containing one main building with a long exhibition building, forming a perimeter for the triangle, and with two cross buildings running across it at right angles to each other. The entire arrangement is novel and apparently excellently well adapted for an exhibition whose purpose is to exhibit things, and not to form a world's playground.

After the great Chicago Fair everything of this nature seems dwarfed. But placed under a powerful and influential directorate, with the full sanction of the colonial government and with a simple and easily understood code of regulations already in official print, there is every reason to believe that the dwellers on the other side of the line will make their exhibition a grand success. One hundred and fifty-six classes, in twenty-four groups, are organized as the division of exhibits.

The idea is to make the occasion of direct utility for those desiring to purchase supplies. It seems obvious that for the manufacturers of the United States an excellent opportunity is afforded to extend their market by exhibiting their products here. A small charge for space is made, and the rules affecting exhibitors seem excellently conceived and well designed to secure fairness and satisfaction.

The firm of Woltmann, Keith & Co., No. 11 Wall Street, New York, represent the exhibition, and intending exhibitors should apply to them for full details and particulars.

A NEEDLE passes through eighty operations before it is perfectly made.

A LARGE PHILADELPHIA ICE MAKING PLANT.

The Knickerbocker Ice Company, of Philadelphia, for many years engaged in the business of harvesting, delivering, and shipping ice, and owning large houses on the Hudson River and in Maine for the storage of naturally frozen ice, has recently established in Philadelphia a large plant for making ice artificially. The company had previously taken up the production of artificial ice, having had several plants therefor in continuous operation for sufficient length of time to make it certain that the business had passed the experimental stage; but this new establishment is the largest and most important of them all, having a capacity of sixty tons of ice daily. The company has sought to make this plant a model one for the production of artificial ice, sparing no expense in obtaining the best mechanical contrivances and facilities, that the cost of manufacture might thereby be reduced to a minimum. The work was executed by the York Manufacturing Company, Limited, of York, Pa., under the direction of Mr. Stuart St. Clair, of that company.

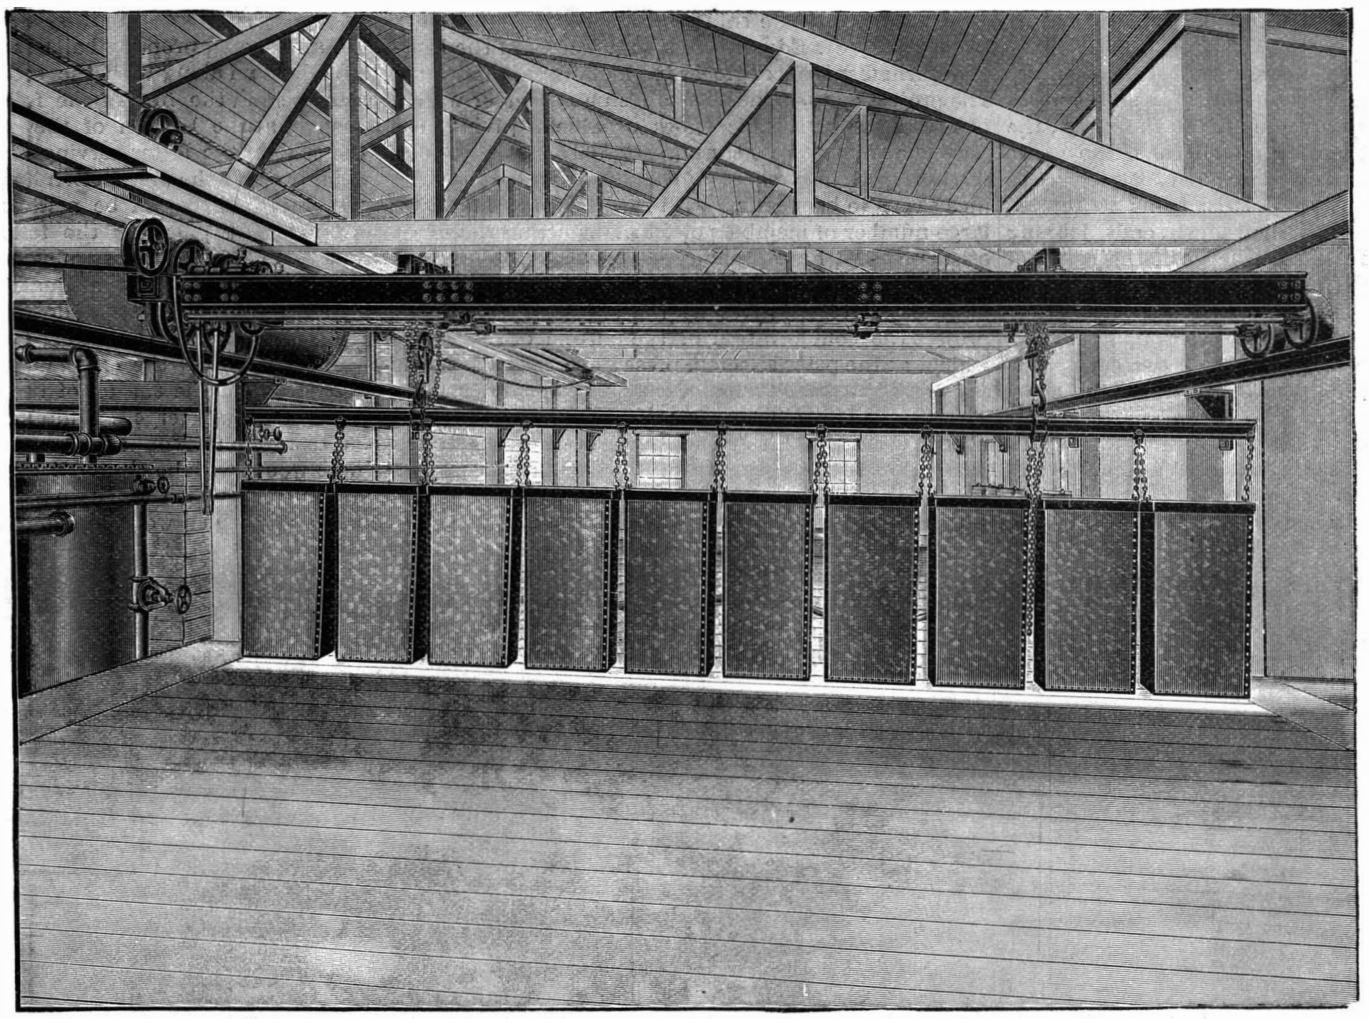

SIXTY-TON ICE MAKING PLANT PHILADELPHIA—POWER CRANE IN POSITION HOISTING 3 000 POUNDS OF ICE.

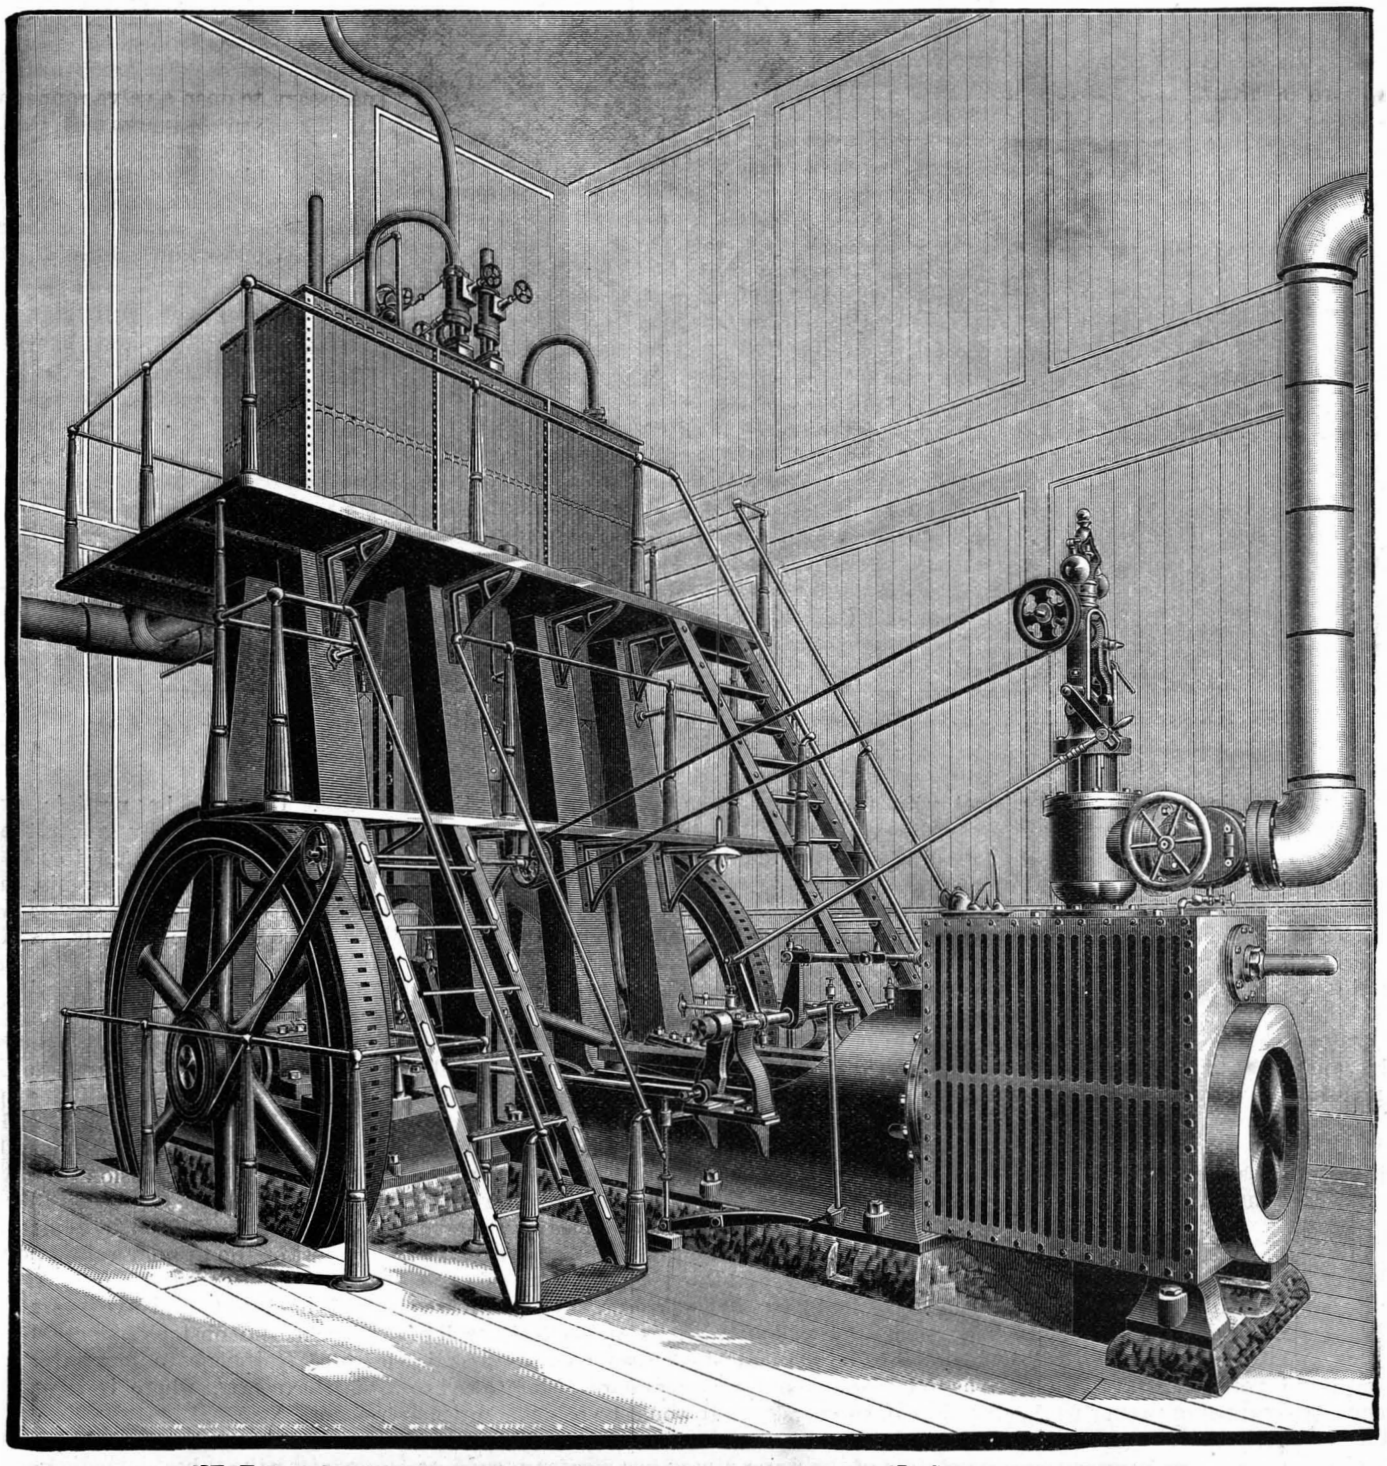

SIXTY-TON ICE MAKING PLANT, PHILADELPHIA—THE ST. CLAIR COMPOUND COMPRESSOR.

The compressor of this plant, shown in one of our illustrations, is the St. Clair compound, having two low pressure or evacuating cylinders 18 by 30 inches, vertical and single acting. The duty of these cylinders is simply that of evacuation and compressing at low tension, maintaining nearly a constant temperature in the cylinders, thereby saving the large percentage of loss that accrues from highly heated cylinder walls. These low pressure cylinders and the receiver of same are water jacketed. The high pressure or delivery cylinder is 15 by 30 inches, and its duty is to simply deliver the partially compressed gas to the condenser. This cylinder works under nearly constant temperature, and is also water jacketed, the temperature of the gas at no point in the delivery ranging

© 1894 SCIENTIFIC AMERICAN, INC.

higher than 130° Fah. The compressor pumps are operated by one of the York Manufacturing Company's balanced valve engines, 26½×30 inches, controlled by a cut-off governor of their own make. The claim made for the efficiency of these engines is very high. The engine and ammonia pumps are operated without any internal lubrication whatever, and, it is said, without any increased friction, demonstrated by careful tests.

The power crane for raising and transferring the ice cans, delivering the ice where desired for storage, is a great labor saver. As shown in one of the views, the crane raises at one lift ten 300 pound cans, the crane being then moved with its load to where the ice is to be stored, when the cans are lowered so as to rest in an inclined position, with their open ends looking down the slide ready for the discharge of the cakes of ice to the dumping platform. In lowering the cans they are dropped between a series of perforated pipes, from which, when the cans are in position, hot water is ejected to sprinkle the surface of the cans, thus liberating and discharging the cakes upon the platform in the manner shown. By this means it is said that one man can easily harvest and put away in storage thirty tons in his twelve hours' watch. Three men on each watch is the total crew required to operate the system at this factory. For our illustrations and particulars as to this plant we are indebted to *Ice and Refrigeration.*

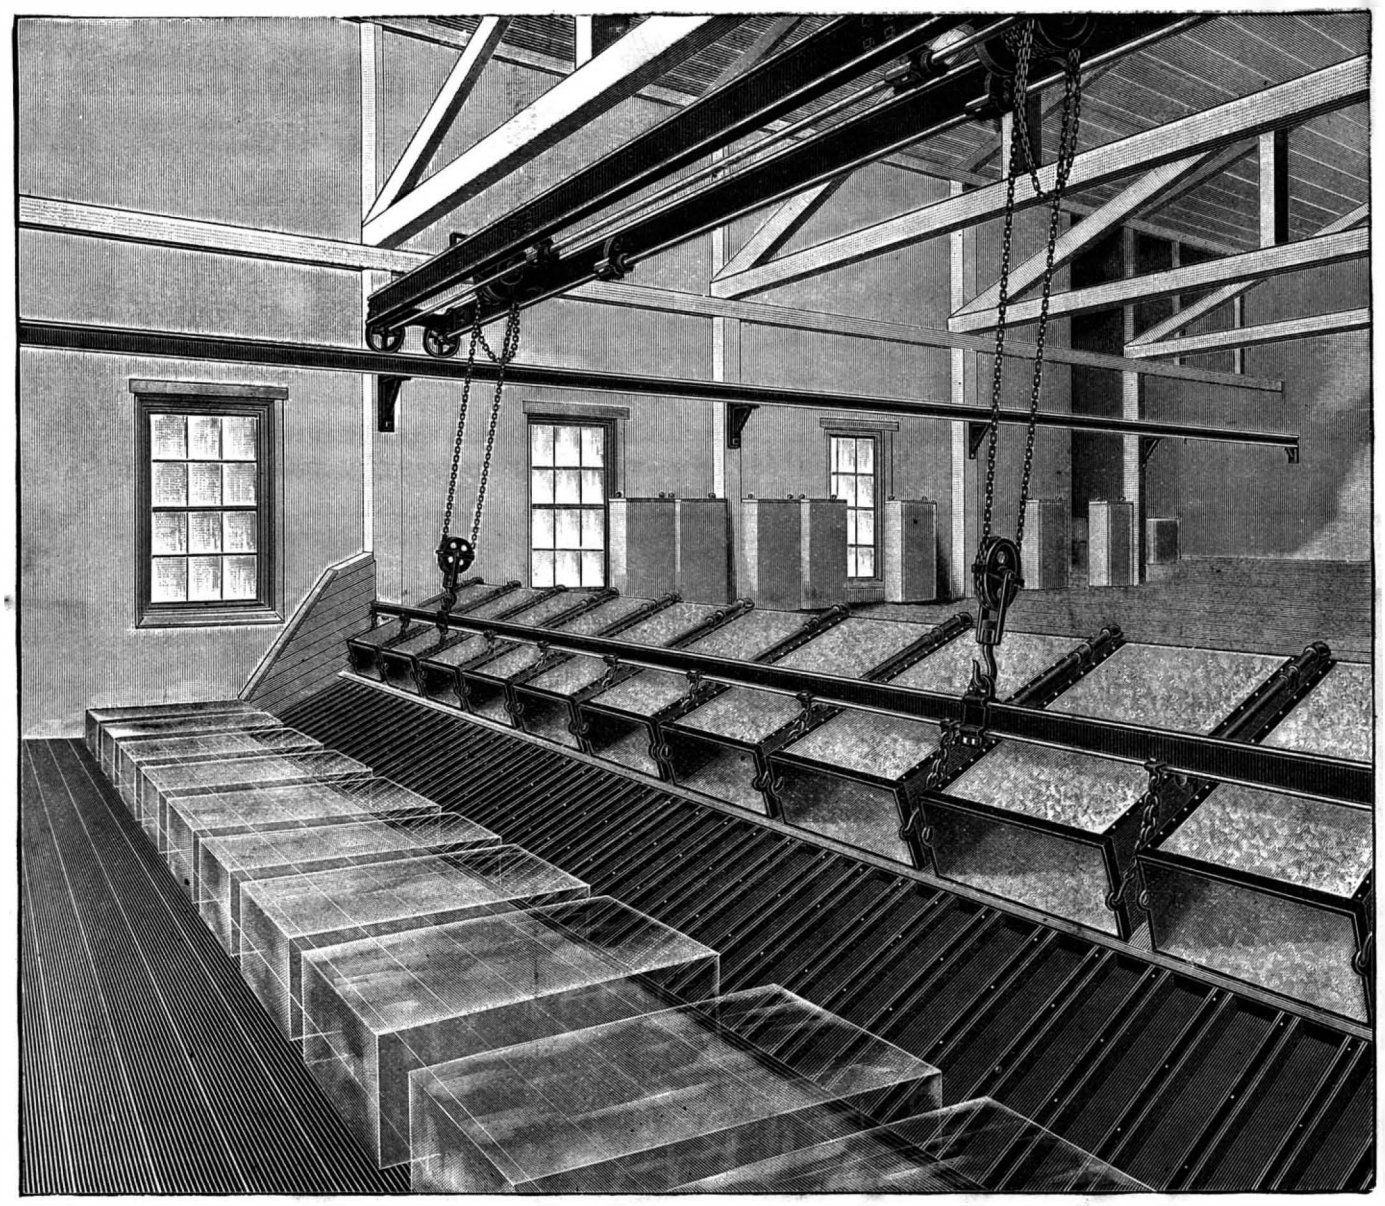

SIXTY-TON ICE MAKING PLANT, PHILADELPHIA—POWER CRANE IN POSITION AT DUMPING PLATFORM DISCHARGING 3,000 POUNDS OF ICE.

Petroleum Briquettes.

The method of making fuel bricks of crude petroleum adopted by Engineer Maestracci, of the Italian navy, is as follows: The bricks are of similar form and size to the coal briquettes extensively used in France and Germany. The mixture is made in the proportion of 1 liter of petroleum, 10 per cent of resin, 150 grammes of powdered soap, and 333 grammes of caustic soda. The mixture is heated and stirred at the same time; solidification begins in about 10 minutes, and the operation must then be carefully watched. If there is a tendency to remain liquid, a little more soda is added. The mixture is stirred until the mass becomes nearly solid. The thin paste is then poured into the moulds, which are placed for 10 or 15 minutes in a drying stove. The briquettes are then cooled, and are ready for use in a few hours.

Signor Maestracci recommends the addition of 20 per cent of wood sawdust and 20 per cent of clay or sand, which will make the briquettes cheaper and more solid. In trials made at Marseilles on several tug boats the petroleum briquettes furnished about three times as much heat as coal briquettes of the same size. They were burned in the ordinary boiler furnace, without any special preparation, and gave out very little smoke, leaving also little or no ash. The advantages claimed for the petroleum briquettes for marine use are the absence of smoke and a large reduction in bulk of fuel which must be carried, as compared with coal, while the risks attending the carrying of liquid fuel are avoided.

THE tunnel which carries the Colorado Midland Railway through the Rocky Mountains, at Hagerman Pass, Col., has just been completed. The tunnel is close upon two miles long, and it is bored through solid gray granite. Its completion involved three years and twenty days' work, each day comprising twenty working hours. The tunnel is 10,890 feet above the sea level.

A Projected Tubular Railway between Calais and Dover.

There is at the present moment a question of a new project having for its object the connection of the European continent with England by railway. It is a problem that has for a long time attracted the attention of engineers and for which many solutions have been proposed. The solution under consideration is proposed by Sir Edward Reed, a member of the English Parliament and engineer in chief of the Admiralty. His project consists in the establishment, under water, of one or more metallic tubes capable of giving passage to a railway, and thus avoiding the principal objections that his predecessors have encountered. The idea seems to be meeting with favor in England and a large number of members of Parliament, hostile to all other projects, have pronounced themselves partisans of the tube.

Sir Edward Reed gives as the *raison d'etre* of his project the configuration of the bottom of the strait, which, at the place selected, presents a relatively plane surface, or, at all events, exceedingly gentle slopes. The tubular line would start from a point of the French coast situated to the south of Cape Gris-Nez, would pass to the northeast of the shelf of the Varne, which it would entirely avoid, and would end at the English coast between Folkestone and Dover, to connect with the Southeastern and London-Chatham-Dover lines. In following this general direction the bottom is found at depths much less than might be expected. The greatest depths are found at about a third of the distance between France and England, where they reach 185 feet. The greatest difference of level between any two of sixteen consecutive soundings a mile apart on the direction line is about 39 feet, which for a length of a nautical mile corresponds to a slope of scarcely 0·08 inch to the foot.

Sir Edward proposes the adoption of a double-walled tube of iron or steel plate. The annular space would be strengthened by a series of longitudinal I-girders, and then filled in with beton of Portland cement. Such a tube under conditions of resistance easy to determine by calculation would be perfectly tight and offer guarantees of almost indefinite duration. As for the putting of it in place, that is a subject that has received special study, and the method proposed forms the most original part of the project. It is proposed to construct the tube in sections of 300 feet, each of which would be hermetically closed at the two ends, so as to be capable of floating and of being towed to the place of submersion. It would be attached by one of its extremities to a huge caisson designed to form at the bottom of the water a very low pier for its support. It is clear that if we have a floating tube, and that by any means whatever we force one of its extremities to descend to the bottom of the water, the other extremity will emerge, the tube as a whole taking an inclined direction. That is precisely what occurs here. The tubular section is brought near the emerging extremity of the section that has preceded it. The floating caisson is attached to it by means of large hinges, and, after being properly ballasted, is made to descend to the bottom along with the second extremity of the first tube and the first of the following. The tube is thus laid at the bottom of the water section by section, each of the latter serving as a guide to the following. After the first section has been properly laid and directed there can be neither error nor difficulty in putting in place all the following, which adjust themselves in a line in the prolongation of one another. As for the forming of the final joints under water, there are numerous ways of doing that.

In order to resist the transverse stresses that may occur when one of the extremities of the tubular section remains at the surface of the water, Sir Edward proposes to submerge simultaneously two tubes 70 feet distant and connected by metallic crosspieces. There would thus be obtained a sort of huge horizontal girder, of which the two tubes would form the chords, and which would present sufficient rigidity to resist all the stresses due to the motion of the water. Each of these tubes would contain but one railway track, designed for the running of trains in a single direction.

Finally we have seen that the tube would be supported by very low submarine piers. It appears preferable, in fact, not to allow them to rest upon the sea bottom. There is assured in the first place a free circulation of the currents above and below, and, in the second place, the laying is greatly facilitated without recourse to submarine dredging, since it is possible to regulate the height of the piers in such a way as to avoid all unevennesses and the slight changes of level of the bottom. As the tube is held at the bottom by the weight of the piers only, it is submitted to upward stresses that may be regulated at will by properly calculating its own weight. It would be possible, even, to completely annul such stresses by giving the submerged tube an ascensional force equal to the weight of a train upon a section. At all events, the projector anticipates that the tube in service will be submitted to stresses that are notably less than in any existing bridge.

As for the ventilation, that will be assured by the fact of the trains always running in the same direction in each tube. They will thus act like huge pistons, forcing the more or less vitiated air before them and sucking in a new column of pure air. There is nothing in the way, however, of having recourse to artificial ventilation, which could be easily established. Electric propulsion would naturally be employed.

According to the calculations of Sir Edward, the total cost of the tubular railway ought not to exceed 375 millions at a maximum, and the construction of it might be effected in five years. Navigation would experience no obstacle, since the tube would be at least 65 feet beneath low water at a short distance from the coasts, where it is very easy to establish beacons.

In case of war, there would be numerous means of inundating the tubes immediately.

© 1894 SCIENTIFIC AMERICAN, INC.

Correspondence.

How to Restore a Dry Cell.

To the Editor of the Scientific American:

I advise J. H. M., in query 5605, to restore his Dr. Gassner dry cell by the passage of the current of two Bunsen cells (in tension) for about an hour, in a direction contrary to that in which the dry cell yields, *i. e.*, connecting the zinc and carbon poles of the Bunsen cells with the zinc and carbon poles of the dry cell. In this case the dry cell acts like a secondary battery. This method saves the trouble of opening the cell, and, moreover, it regains more or less its original activity.

F. HAUSHAHN.

Propaganda, Rome, Italy.

Drawing in General Education.

D. R. AUGSBURG, SALT LAKE CITY, UTAH.

Language and number have heretofore been the beginning and end of education in the common schools.

Language is here taken as the general name for reading, spelling, and grammar, and number for mathematics. These two studies have been pursued with a persistence which has led to the popular belief that they were all in all, and that nothing more was needed to lay the foundation of a well rounded and complete educational training.

But modern education has kept pace with modern thought and ideas, until to-day training along these two lines alone is found to be insufficient; that with these two for a foundation the superstructure is one-sided and incomplete; that if the end sought is a harmonious and well rounded education, the foundation must be made broader and stronger.

Modern education recognizes three grand divisions of educational training: body training, mind training, and soul training. The harmonious development of these three is the sum total of education. Of these, mind training receives the most attention in the common schools. Four studies are at the basis of mind training. They are *number*, *language*, *drawing*, and *music*.

Drawing here is taken in the widest sense as representing the elements of both form and color. It is the mental process by which ideas are represented both pictorially and in solid form.

Of these four studies, drawing alone seems to be viewed by the masses with suspicion. Because it was not taught in their day, and they do not feel the need of it, they pronounce against it. By the same argument, the successful business man who has had no schooling in his early days pronounces all scholastic study humbug. It may be said of any department of knewledge, that one does not understand its importance until he enters into its domain himself, or sees another put it to practical use in the affairs of life. So those who have not learned drawing do not, in their own experience, know what they have lost.

But if number, language, drawing, and music are the fundamental studies, then all others are but branches, and these four studies are the elements of which they are composed. This is even so, for without a knowledge of these studies, it would be difficult to acquire a knowledge of other branches. For example, the elements that enter into the study of geography are number, language, and drawing. In other words, in order to understand geography one must have a knowledge of mathematics, language, and form, because these are the elements on which it is based.

In the same manner number, language, and drawing are the foundational aids in acquiring such branches as physiology, physics, geology, etc. The trades are almost entirely based on these three studies.

In proportion to the knowledge of and ability to use these four elements, the branches become easy and the time for their mastery is shortened.

Drawing is largely the basis of the trades. The stone cutter cuts a capital out of marble with chisels, the draughtsman draws it on paper with pencil; the manual process differs, but the mental process is the same. The blacksmith draws a horseshoe with a hammer, the draughtsman draws it with a pencil; the manual process differs, but the cerebral activity is the same. In like manner the painter draws with a brush, a carver with chisels, a tailor with shears, a mason with trowel, and the carpenter with various tools. The lathe is a machine for drawing different forms in iron and wood, the band saw for sawing out designs, the loom for drawing fabrics of all sorts. With all these machines, if a pattern is not used, the operator is the artist, and designs his own work. If a pattern is used, the one that designed it is the artist, and the operator is but a part of the machine. He is an artisan.

If a blacksmith can draw beautiful designs on paper, he can hammer them out of iron. If the draughtsman can draw a horseshoe on paper, he can hammer it out of iron as soon as he has overcome the technical difficulties. If a person can draw a design on paper, he can construct that design in any trade or department as soon as he has overcome the mechanical difficulties of that department.

Outside of the mechanical arts, drawing is the basis of a large number of branches. It is the basis of *the decorative arts*—frescoing, tapestry, embroidery, and lettering; *the plastic arts*—carving, moulding, modeling, and sculpture; *the reproductive arts*—etching, engraving, lithographing, printing, photography; *the productive arts*, which include original work in any department.

Drawing shortens the school course.—By cultivating the perceptive powers, the time is shortened in acquiring those branches that wholly or in part depend on observation. Trained perceptives add wonderfully to the powers of the imagination. A cultivated imagination enables the pupil to see a river in a rill, a mountain in a hillock of sand, or a lake in a pool of water; will enable him to journey with you in imagination across the trackless ocean, through the jungles and forests, up the rivers, over the plains, and across the mountains; will enable him to see forms beyond the range of vision, and compass magnitudes too vast for measurements. Imagination is the creating faculty.

Drawing is one of the surest means of acquiring knowledge.—To draw an object requires intelligence and close observation; to reproduce that object, a cultivated memory; to reproduce a modified form of that object, a trained imagination; and lastly, to represent an idea from that object requires knowledge, memory and imagination. For example, it requires close observation to draw a cat; an acute memory to recall the image, and reproduce it on the blackboard; a trained imagination to be able to represent the cat climbing a tree; and lastly a combination of these three to associate cats together, making a harmonious composition.

Drawing cultivates the hand and lays the foundation of technical education.—It is a study that seldom, if ever, becomes involuntary, like writing, but is always under the direct supervision of the mind. To draw even the most simple object requires the concentration of the mind in directing the hand for its reproduction. This constant working of the mind and hand in harmony with each other leads to great precision and accuracy in the use of the hand. The precision and accuracy may be utilized in any department of work.

Drawing is the basis of accurate observation.—To reproduce an object requires the closest scrutiny of that object, not only of the details, but of the whole form taken as a unit; not only the shape of the tree, but the character of its branching and foliage as well. Not only the form and color of a flower, but the number and arrangement of its petals, stamens, and pistil. A trained observation will see that a cat is similar to a tiger, a dog to a wolf, and a rat to a beaver; will see the similarity of an island to a lake, a strait to an isthmus, and a cape to a bay. Observation gives ideas.

Drawing is a study peculiarly adapted to children.—Children love drawing. The perceptive powers are the most active in childhood. Mental activity begins in the senses. A little child lives in his senses. He delights to see, hear and feel. His eyes are sharp, his ears acute, and his fingers are busy. He learns best by seeing and doing. Drawing is seeing and doing.

To the teacher drawing is a great help, not only in awakening interest, but in lessening her labor and making school more attractive. There is no limit to the resources which this subject places at her command. She can bring into the school room a lake, a mountain, or a river; all kinds of animals, birds, and reptiles; all kinds of trees, shrubs, and plants, fruits and flowers. She can show how the Eskimo lives in the frozen regions of the North, and the savage among the tropical forests of the South. She can bring into the school room the Pyramids of Egypt or a Chinese pagoda. She can use drawing in object lessons and for busy work. It can be used in the reading, number, and language classes; in the geography, history, and physiology classes; and as the handmaid of the sciences. She can illustrate what she sees, thinks, and imagines. She thus opens a new field, a new world, and makes life wider and broader and deeper.—*Education.*

What Our Contemporaries Think of It.

THE SCIENTIFIC AMERICAN is—by all odds—the most interesting of all the many publications which come to our office. It claims the largest circulation of any scientific paper in the world, and we don't doubt it. It is finely illustrated and its articles are so written that even a child can follow them understandingly. It is a great educator. Its publishers, Munn & Co., New York City, are patent solicitors, and are ranked among the best. Every patent taken out by them receives a free notice in the SCIENTIFIC AMERICAN.—This gives the article a good "send off."—*Varnish, Philadelphia.*

THE SCIENTIFIC AMERICAN.—We note with pleasure the addition of the SCIENTIFC AMERICAN to our exchange list. This paper has stood for the last forty years at the head of its class of publications—it has no superior. As a scientific and mechanical journal it cannot be excelled. The patent agency of Munn & Co., connected with it, is one of the few strictly reliable agencies in the United States. Those of our readers who desire to obtain a patent, and wish to have their interests well attended to, cannot do better than to address Munn & Co., New York, for their pamphlet containing full information about patents, caveats, etc.—*The Texas Courier-Record, Dallas, Texas.*

THE MOST POPULAR SCIENTIFIC PAPER.—The SCIENTIFIC AMERICAN, of New York, an unrivaled periodical now in its forty-ninth year, continues to maintain its high reputation for excellence, and enjoys the largest circulation ever attained by any scientific publication. Every number contains sixteen large pages, beautifully printed, elegantly illustrated. It presents in popular style a descriptive record of the most novel, interesting, and important advances in all the principal departments of science and the useful arts, embracing biology, geology, mineralogy, natural history, geography, archæology, astronomy, chemistry, electricity, light, heat, mechanical engineering, steam and railway engineering, mining, ship building, marine engineering, photography, technology, manufacturing industries, sanitary engineering, agriculture, horticulture, domestic economy, biography, medicine, etc. A vast amount of fresh and valuable information pertaining to these and allied subjects is given, the whole profusely illustrated with engravings. The most important engineering works, mechanisms, and manufactures, at home and abroad, are represented and described in this instructive periodical. The publishers of this journal, Munn & Company, are the well known patent attorneys, and those desiring to procure information pertaining to the securing of patents should not hesitate to consult them, as they have had nearly fifty years' experience at this business and are capable of obtaining patents quickly.—*Army and Navy Register, Washington.*

To Measure a Room for Wall Paper.

To determine the number of rolls of paper to cover the walls of a room, measure the circumference, from which deduct the widths of doors and windows and divide the remainder by 3.

Example.—Let us suppose a room 12 × 16 feet, which has two doors and two windows, which average 4 feet wide:

$$12 \times 12 \times 16 \times 16 = 56, \text{ circumference.}$$
$$4 \times 4 = 16, \text{ doors and windows.}$$
$$56$$
$$16$$
$$3)40$$
$$13\tfrac{1}{3}, \text{ or say 14 rolls.}$$

This rule is calculated for a room of not less than 10 or more than 12 feet in height. For a room under 10 feet high, having a frieze, say of 6 inches, we will proceed as before with the measurement of the room, deducting the widths of doors and windows. But in this case multiply the remainder by 2 and divide by 15; for this reason, that we can cut 5 lengths out of a double roll, which, placed side by side on the wall, cover a space 7 feet 6 inches from the ceiling, and instead of multiplying by 7 feet 6 inches, we multiply both by 2.

Example.—Take a room 14 × 14, with two doors and windows:

Circumference of room	56
Less for doors and windows	12
	44
	2
	15) 88
	$5\tfrac{13}{15}$

Say 6 double rolls, or 12 pieces. Of course if a dado is required its width will determine how much paper will have to be deducted.—*The Carpet and Upholstery Trade Review.*

Duroline.

Duroline is a translucent, waterproof, pliable material, recommended and used as a substitute for glass for roofing large buildings, etc. It has for its basis a web of fine iron wire with warp and weft threads, and is covered with a thick translucent varnish. It is easily bent, can be cut with strong scissors, and is said to be weather and heat proof. Samples of it were sent to Kew in October last by the manufacturers, inviting "attention to the special applicability of our patent unbreakable glazing material duroline for the glazing of Wardian cases, in which plants are sent and received from abroad. We believe much damage and annoyance results from the breakage of glass in these cases."

Six Wardian cases were, therefore, "glazed" with this material, and were dispatched filled with plants to Ceylon, Australia, Jamaica and Lagos during the summer. In every case they were favorably reported upon, and some of them have been returned to Kew filled with plants which reached us in good condition. The only drawback we have found in duroline as a substitute for glass in Wardian cases is its stickiness inside after it has passed through the tropics, and the consequent gluing to it of the plants where they touch. This stickiness is due to the moisture and warmth inside the case. The manufacturers say "the more duroline is exposed to weather, the harder it becomes." On the whole, we can report favorably upon duroline for Wardian cases. We also think it might be used for many purposes in the roofing of sheds and plant structures in tropical countries.—*Kew Bulletin.*

© 1894 SCIENTIFIC AMERICAN, INC.

AIR PUMPS OF THE CRUISER NEW YORK.

The independent air pumps of the cruiser New York, built by the Geo. F. Blake Manufacturing Company, are quite novel in construction and performance. The New York, like all the government vessels, has very little room to spare for engines and their auxiliaries, consequently the design of the air pump had to be one combining compactness, minimum weight and maximum efficiency. As shown by the illustration the design of this pump is of the vertical direct acting type—Blake system. The air cylinders are of the vertical single-acting pattern, operated by double-acting steam cylinders; there being two air cylinders, the flow of the water and vapors is practically continuous. The piston rods are connected to the beam by means of links, etc. The air cylinders and the working parts of same are entirely of gun metal composition, which is the usual practice in the United States navy. The piston rods of the steam cylinders are of steel, as also the valve gear, which latter can be adjusted by hand even while the pump is in operation, thus securing full stroke at all times.

These pumps are particularly remarkable for the low percentage of power required to operate them in comparison with the power of the main engines. From the official report of the trial trip the I. H. P. of the Blake air pumps was less than one-quarter of one per cent of the I. H. P. of the main engines. The explanation is, perhaps, due to the very complete and perfect arrangement of the steam valve gear, which so thoroughly controls the operation of the pump that a very low rate of piston speed is sufficient to give a first-class working vacuum. The average speed of the air pumps on the trial trip of the New York was less than 16 double strokes per minute, while the minimum speed was only 9½ double strokes. The pumps can be run at practically any speed necessary without danger of "dead center." These air pumps are to be placed on all the vessels building for the navy by the Cramps, viz., the Columbia, Minneapolis, Brooklyn, Indiana, Massachusetts and Iowa. Each of the New York's air pumps has two double-acting steam cylinders, each 12 inches diameter, two single-acting cylinders, each 25 inches diameter. Stroke of all, 18 inches. The working parts of these air pumps are exceedingly simple and strong. The steam valves of the steam cylinders are plain "D" slide valves, which, by means of levers, are operated by a supplementary piston which moves in the horizontal steam cylinder shown. This supplementary piston is also operated by a plain "D" valve connected to the valve rod which has adjustable collars for regulating stroke. This valve rod is moved by means of the rod attached to the working beam from which it gets its motion.

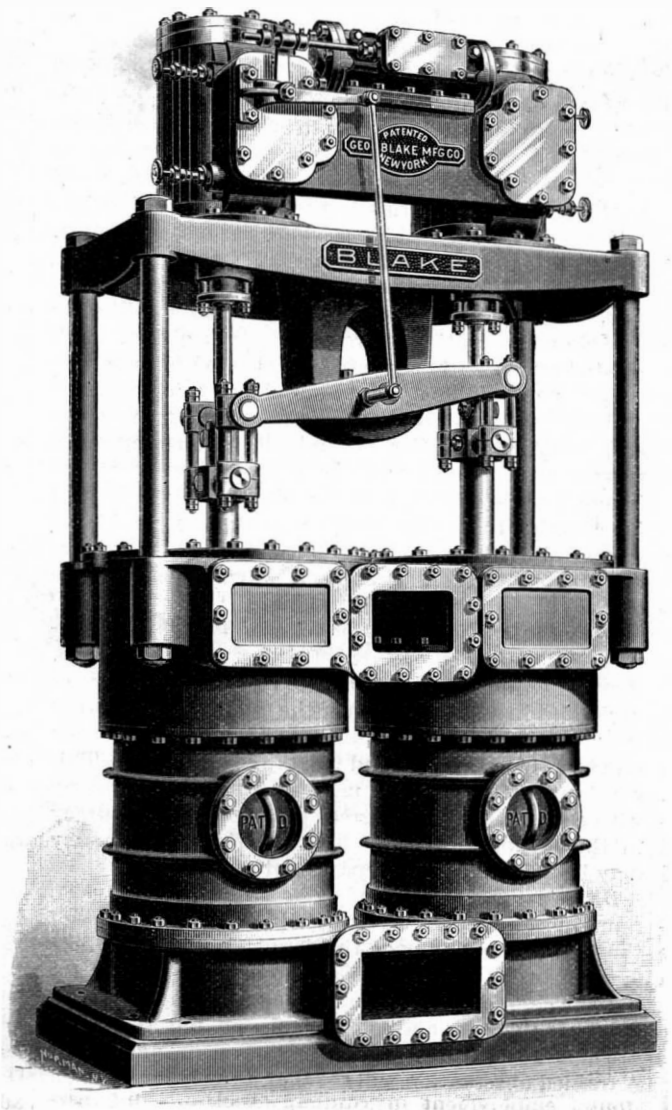

BLAKE'S VERTICAL TWIN CYLINDER AIR PUMP.

ELECTRIC RAILROAD MAIL SERVICE IN OTTAWA, CANADA.

In recent numbers of the SCIENTIFIC AMERICAN we have had occasion to speak of the utilization of cable and electric cars for the distribution of mail. It seems practicable to greatly improve the house to house delivery of mail, as well as the collection of letters from lamp post boxes, by utilizing the street cars for post office service. The cut accompanying this article shows how our northern neighbors are employing the electric car in post office service. The carrying of the mail "experimentally" from the Ottawa, Can., railroad station to the post office in the same city began on November 10, and the service has proved very satisfactory, so much so that other cities in Canada will undoubtedly adopt the same system, and the post office is expected to extend the operations to suburban places.

In Ottawa three cars have been put in service, one of which is shown in the above cut, for which we are indebted to the *Street Railway Review*. The cars were built by the Ottawa Car Manufacturing Co., specially for the post office work. Each car is twenty feet long, with vestibuled platforms, and is driven by a 30 horse power Westinghouse motor. The interior is arranged with the requisite facilities for loading and unloading the pouches. No sorting is done on the car, so that the usual glass windows are dispensed with.

A special alarm gong is provided for each car, which gives a different sound from the gongs on the passenger cars, thus making its approach known. Special sidings have been laid for the car at the post office and railway yard. The motormen and other employes are uniformed. The contract with the electric railroad company calls for a compensation of $4,000 per annum for the work, the motorman being supplied by the railroad company; the post office employes act as messengers. The delivery by horse and wagon formerly cost $3,000 a year. Thus there is no direct economy shown, but the efficiency of the service is presumably worth the difference.

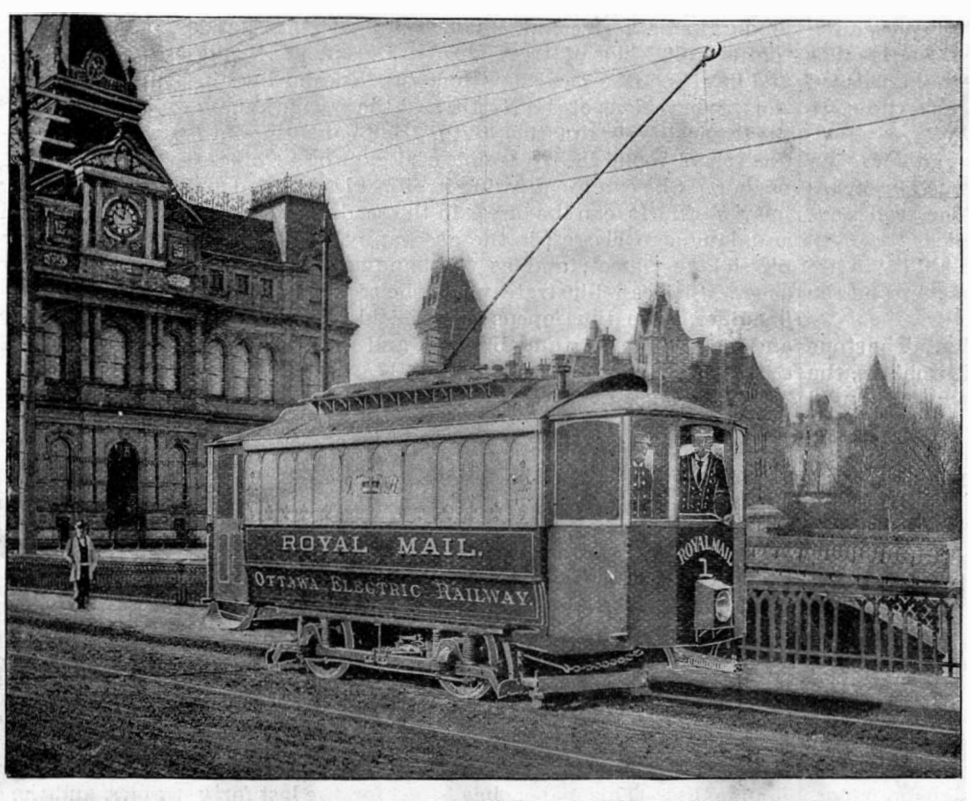

ELECTRIC MAIL CAR No. 1, OTTAWA, CAN.

ACCORDING to a French statistician, there were in 1893 51,000 breweries in the world. Germany heads the list with 26,240, producing annually 4,750,000,000 liters of beer (the liter is equal to 1¾ pints nearly). England comes next with 12,874 breweries, the output being 2,600,000,000 liters. The United States is third, with 2,300 breweries, producing 3,500,000,000 liters. Austria, with 1,942 breweries, produces 1,300,000,000 liters. Belgium has 1,270 breweries and France 1,044; the former produces 1,000,000,000 liters and the latter 800,000,000 liters. The annual allowance of beer per head of the population in Bavaria is 221 liters; in England, 143; in the United States, 31; in Sweden, 11; and in Russia, 5.

The Nansen Expedition.

Dr. John Murray, the well known authority on Arctic and Antarctic exploration, has made the following statement with regard to Dr. Nansen's expedition:

"In all probability we shall not hear any more of Nansen for a long time to come. The last news from him clearly indicates that he was able to push his way through the Kara Sea early in August. By the time he arrived in the Nordenskjold Sea he most probably found the dogs an intolerable nuisance on board his small ship, and very likely he had made up his mind that they would be of little use to him, except in the improbable event of his finding a large stretch of land toward the North Pole. Supposing the expedition to be all well off Cape Chelynskin, there seems no reason why it should go south to Olenek. Nansen had no intention of going as far east as the new Siberian Islands, supposing an opportunity offered of penetrating the ice to the northeast of Cape Chelynskin, and all reports tell of open water in this direction during the past season. The chances are that he is now fixed in the ice somewhere between the longitudes 120 and 130 east and latitudes 78 and 80 north. If so, he is then in the most favorable position for progress next summer. During the winter it is not likely that any great advance will be made, but in the spring and summer months it is believed that the drainage from the Siberian rivers and the wind pressure on the surface of the ice floes combine to set the currents and ice from opposite the mouths of the Lena across the Pole and down into the Norwegian Sea between Spitzbergen and Greenland. If the Fram is carried through the Polar basin without being crushed among the ice floes, she will have an extraordinary run of good luck. It is possible, but not probable, for I have no great faith in her being lifted up on the ice, should she come in for a "nip." But supposing the Fram be crushed, Nansen's expedition is not at an end. In all probability he will be able to save his boats, transfer his stores to the ice floes, and there construct comfortable quarters. Should his supplies fall short, he will always be able to fish up from underneath the ice plenty of food in the form of minute crustaceans by means of tow nets let down through holes in the ice. Once when frozen in between Spitzbergen and Greenland, I procured enormous numbers of animals in this way which made an excellent soup. I presented the Nansen expedition with a large number of silk nets for this purpose. Nansen may be five or many more years in passing across the Arctic basin, he may fail altogether, but I shall be disappointed if he be not heard of to the north of Spitzbergen during the summer after next."

The Crozier-Buffington Disappearing Gun Carriage.

The value of disappearing gun carriages, especially for coast defense, has been clearly demonstrated. A gun on an ordinary barbette carriage offers an inviting target, and a fleet would naturally try to dismount it. The gunners are also exposed with a barbette carriage. A number of disappearing gun carriages have been invented and tried in this country. The Crozier-Buffington disappearing gun carriage is somewhat lighter and more graceful than the Gordon carriage, and the tests have been highly satisfactory. In the firing position of the Crozier-Buffington carriage the trunnions of the gun rest in sockets at the ends of a pair of huge levers which swing freely, and are attached to a large counterpoise. This is lifted and held up by a pawl and ratchet. When the gun is fired the piece recoils and the levers sink. With an 8-inch breech loading rifle the counterpoise weighed 37,000 pounds. Connected with the breech of the gun is a pivoted framework which keeps the gun in exactly the same position. In addition to the counterweight, which takes up only about one third of the recoil, there are two hydraulic cylinders which receive the remainder. The cylinders are horizontal and fixed while the pistons are stationary. The new carriage holds the record for speed, as ten rounds were fired in twelve minutes and three seconds. The time of firing a round is divided about as follows: In loading fifty-five seconds were consumed, in raising to position five seconds, in firing one second, and one second was required for the recoil. The new gun carriage is highly efficient and reflects great credit on the American inventors.

© 1894 SCIENTIFIC AMERICAN, INC.

THE COLUMBIAN EXPOSITION—FORESTRY EXHIBITS.

The Forestry building, notwithstanding its bad location in the so-called "back yard" of the Exposition, was constantly filled with visitors who were anxious to see the curious and instructive exhibits. In no other building in the grounds, save, perhaps, the Anthropological building, could so much be learned in a single visit. The collectors were, in many cases, enthusiastic amateurs who spent months in preparing the exhibits. We illustrate herewith some of the curious things in the line of forestry. We can trace the life history of trees and elucidate the systematic workings of nature in regard to them; we can explain what has been learned by patient investigation in regard to natural forces as exhibited in the plant world, but we are occasionally startled by a wild freak of nature and we are left in wondering admiration of the subtile and almost incomprehensible power which has produced the abnormal. An example of this was shown by the curious natural graft which we illustrate in Fig. 1. The

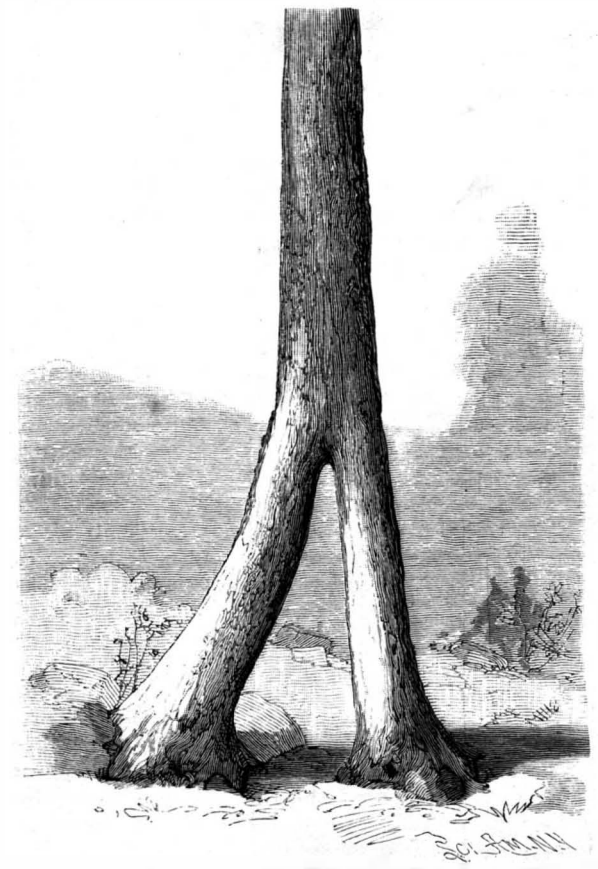

Fig. 1.—CURIOUS CASE OF NATURAL GRAFT.

two trees are a white pine and a rock or sugar maple. The crotch formed by the graft was three and one-half feet long, and the total piece exhibited was, perhaps, six or seven feet long. The union of two such trees, when accomplished in a natural way, presents an interesting field for speculation. How were the trees denuded of their bark when they were young saplings, so as to allow of grafting? Deer or other animals may have scraped or eaten off the tender bark, or the saplings may have been scraped by a falling tree. Possibly the young trees were blazed in making a forest path, but this is hardly likely to have been the case, as young trees are rarely selected to blaze. However the bark may have been removed, it is probable that they were brought together during a storm in the spring time, when the sap was running. This specimen came from Wisconsin, as did the two following, and the bugle illustrated in Fig. 6. All were collected by Mr. H. A. Batchellen, who gathered many of the specimens on exhibition, in winter, with the aid of snow shoes. Fig. 2 shows another natural graft of two white pine trees which is even more extraordinary than the last. The white pine is a hardy tree and accommodates itself to almost all kinds of soils, but at the same time it is very susceptible to influences which retard or warp its growth when it is young. This is shown by the curious growth illustrated in Fig. 2, which is also a piece of a white pine tree. The specimen resembles the gnarled and twisted stone pines which add so much to the charm of the scenery on the Italian shore of the Adriatic.

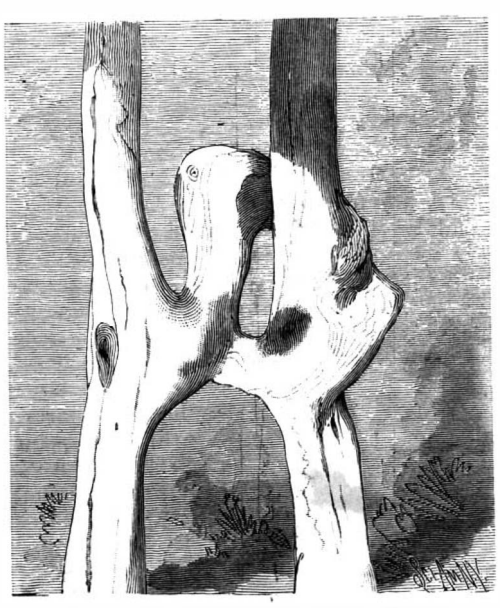

Fig. 2.—A VEGETABLE BOW KNOT.

Fig. 4 shows deer horns embedded in wood, the trees being burr oak and whitewood. It is no uncommon thing to find in the great deer parks of England the antlers of deer, and even a foot which was caught in the branches and torn off through fright and pain. The antlers embedded in the wood can probably be accounted for in this way, the wood growing around them.

At the bottom of Fig. 4 will be seen an iron ring embedded in the wood. Some one hung the ring on the limb of a hickory tree and the tree grew over it, covering it until it was again exposed to view by the woodman's ax. These specimens were all from the Michigan exhibit.

Fig. 3 shows a similar curious growth of a tree around a horseshoe. The horseshoe was hung on a small branch and was gradually embedded in the heart of the tree. This interesting specimen was shown by Mr. B. B. Brabham, of York County, Nebraska.

The woodsmen of the great Northwest find time hang heavy on their hands when their arduous labor is finished, so that they frequently spend their odd hours in fashioning some odd little trinket out of wood. The birch bark bugle, which we illustrate in Fig. 6, was really used as a dinner horn in a Wisconsin logging camp. The bell portion of the trumpet was composed of three pieces, which were shaped and joined after the fashion of the gores to a balloon. The portion of the instrument thus constructed was afterward covered with narrow strips of birch bark wound around and around, forming a smooth covering. The turn was made entirely of the strips of bark. This bugle does not call for any particular skill, and it would make an interesting occupation for young people to make them during the summer vacation in the country.

Fig. 5 shows a novel method of cutting clapboards which was exhibited by the Trout Creek Lumber Company, of Trout Creek, Michigan. For this exhibit they received a premium. This method, called quarter sawing, has marked advantages, the sawing being very economical and the grain is the same in each clapboard. The loss on account of cracks is minimized. In large trees two or more layers of clapboards are cut out. The log shown in our illustration was about sixteen inches in diameter.

Motormen.

Within the last few years a large number of men have found employment in running electric street cars. Members of this body have been given the name of motormen, and in some parts of the country they are known as motorneers. The motormen were, at first, recruited from the ranks of the horse car drivers, but the demand for them has been so great that men knowing nothing about street car work have, after a little practice, been placed on the front platform of an electric car. Street car companies have, as a rule, selected for this position men who possess intelligence and are not easily confused. The position of a motorman in a crowded city is not an enviable one. He has a great deal of responsibility resting upon him and is in a position to receive much blame and but little commendation.

There has been much discussion among street railroad engineers as to the advisability of giving the conductors and motormen instructions about the electrical mechanism which propels their cars. Some companies hold that a simple knowledge of the method of operating the switches, rheostat handle and break is sufficient, and that by keeping the operator in ignorance of the electrical principles involved, a proper respect for, and dread of, the system would be installed in his mind, and thus cause him to keep strictly to the running rules and not make any experiments on his own account. In case of trouble with the motor or connections the car has to be delayed till the arrival of an inspector. It is hardly necessary to say that the policy is not a good one, either to the company or to its employes. An ignorant man handling electrical apparatus is very much more likely to cause damage than a man well informed on the subject, although the latter may make a few experiments. If the experiments are made by one not conversant with electrical principles, the results are usually disastrous. The writer knows of a case where a man who, having in charge the running of several motors, wished to see what would be the effect of placing a short copper wire across the terminals of a 250 volt switch. He found out. He does not do it now. The practice of most railroad companies is to instruct their car employes in elementary electric principles, so that they are able to remedy any of the minor troubles occurring *en route*. In case of any serious defect the car is sent to the repair shop. If possible the motorman should be instructed in the "whys" as well as the "hows" of the machinery under his control. Being thus equipped, he will be a more efficient motorman and will be better fitted to cope with any emergency.—*Electrical Age.*

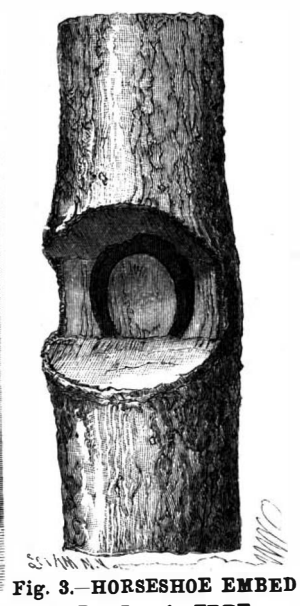

Fig. 3.—HORSESHOE EMBEDDED IN A TREE.

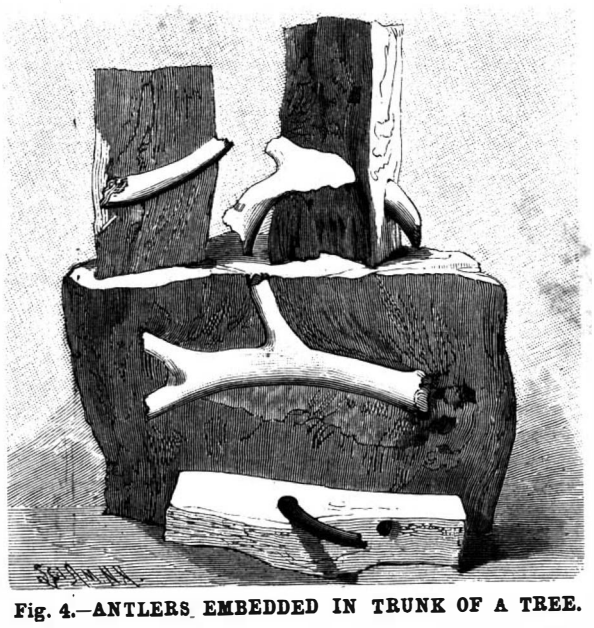

Fig. 4.—ANTLERS EMBEDDED IN TRUNK OF A TREE.

The Coin-in-the-Slot Telephone.

The Chicago Telephone Company, so the *Western Electrician* says, has just placed in several of its public pay stations instruments provided with a slot arrangement which may prove of considerable value to the company, by putting a stop, in a great measure, to the dead-heading at public stations which has been the source of much annoyance to the telephones in general. The idea is not a new one, but it is regarded

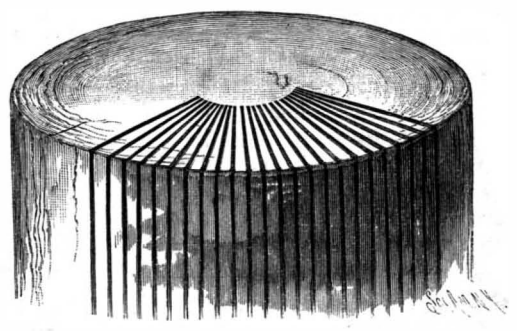

Fig. 5.—METHOD OF CUTTING CLAPBOARDS—NO WASTE.

with displeasure by those who have been accustomed to use telephones without paying for the service. The battery box is much larger than is ordinarily the case. On the top are five slots, respectively large enough to admit a silver dollar, half, quarter, dime and nickel. Each slot has a chute running directly to a bell inside the box. From the top of this box there is a transmitter to carry the sound of the five bells to the transmitter through which the user of the telephone talks. The bells differ in tone, and with a little practice the operator at the exchange can readily distinguish the

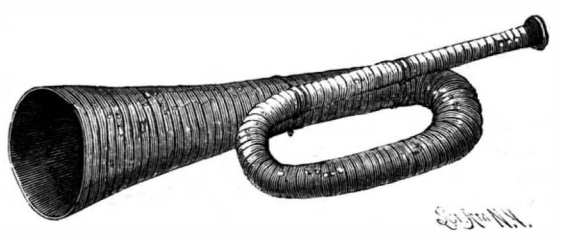

Fig. 6.—BIRCH BARK HORN.

sound of each. Each instrument is equipped with a metallic circuit and long distance transmitter, so that calls for any station that the telephone reaches can be made. These instruments have been in operation in New York and Boston for some time, and are said to have filled the requirements made upon them with a good degree of satisfaction.

A PHYSICIAN who got rid of some of his steel instruments and bought others made of aluminum says that he is sorry that he changed. The aluminum probes, sounds, tongue depressers, and that sort of thing do not oxidize, to be sure, but he finds that they are deficient in elasticity, and stay bent after pressure. He declares, moreover, that he likes to feel as if he had a hold on something when he uses an instrument, and aluminum is so light that it makes him feel as if he could put no trust in it.

© 1894 SCIENTIFIC AMERICAN, INC.

A NEW LAKE STEAMSHIP.

The rapid progress which is being made in steamship building in the West is well illustrated in the latest production of the Globe Iron Works, at Cleveland, O.

The steel steamer Northwest, the largest and certainly the finest built and equipped vessel that ever floated on fresh water in the United States, built for the Great Northern Line, was successfully launched from the shipyard of the Globe Iron Works Co., Cleveland, O., on the 6th of January, in the presence of a vast crowd of spectators. Nearly every lake port between Buffalo and Duluth was represented by delegations of vesselmen. A number of Atlantic coast shipbuilders were also present.

Her general dimensions are as follows: Length over all, 383 feet; length between perpendiculars, 360 feet; breadth, moulded, 44 feet; depth, moulded, 26 feet; depth to spar deck, 34 feet 5 inches.

The vessel has been built of mild steel throughout, with an inner bottom extending from the collision bulkhead forward to the afterpeak bulkhead aft. She has been built under special survey in order to obtain the highest classification in the United States Standard Register of Shipping.

The hull has been specially strengthened and subdivided through transverse and longitudinal bulkheads into numerous water-tight compartments. The construction throughout has been planned and carried out with the view of making the vessel not only the most modern and luxurious, but also the strongest and safest on the Great Lakes. She is fitted with two vertical quadruple expansion engines of 3,500 horse power each. The engines, when turning 120 revolutions per minute, will indicate 3,500 horse power each, and with a total horse power of 7,000 the vessel is expected to make an average speed of over twenty statute miles per hour. The propeller wheels are four-bladed, sectional, 13 feet in diameter and 18 feet pitch. The vessel cost about $600,000. We are indebted to the *Marine Record* for the foregoing particulars and for our illustration.

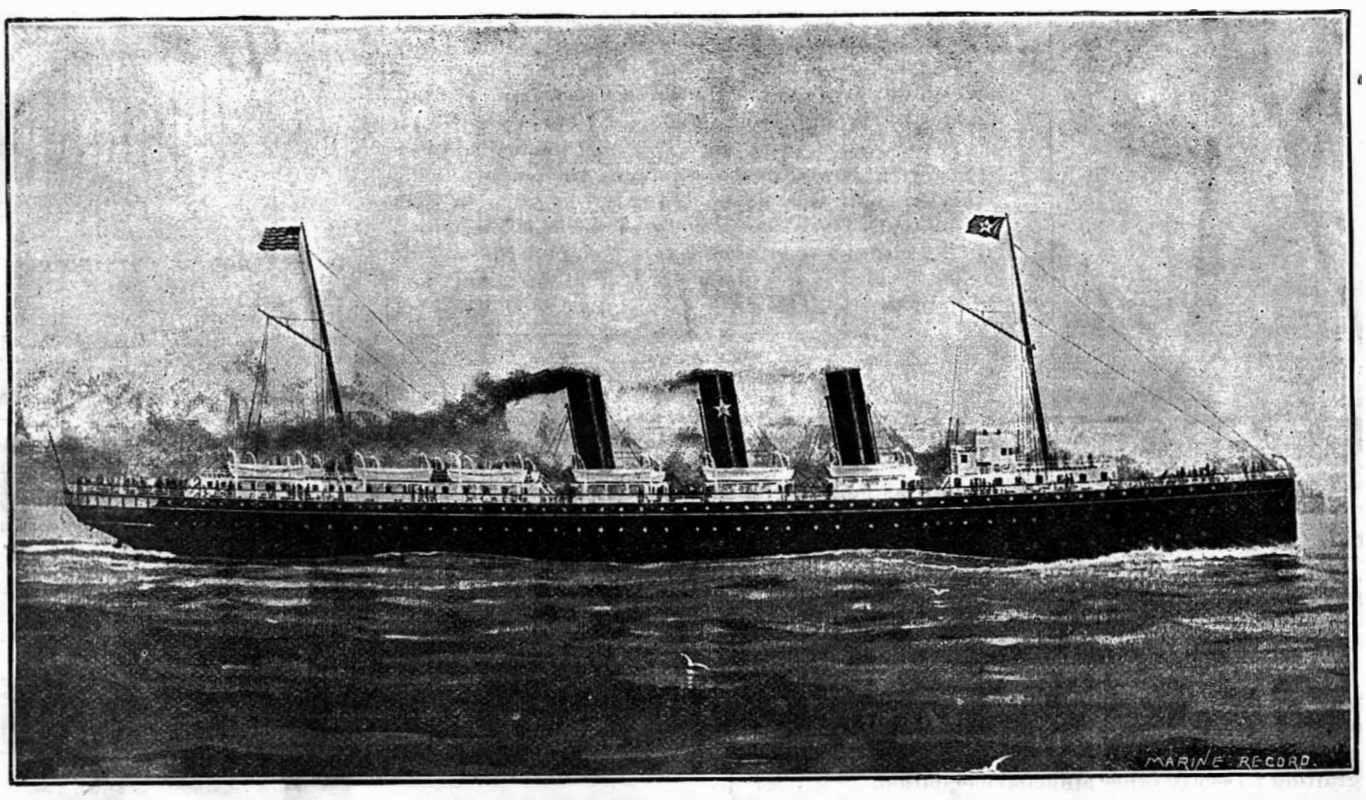

TWIN SCREW PASSENGER STEAMER NORTHWEST.

The Borgalle Tunnel.

The Borgalle tunnel on the Parma and La Spezia railroad, of Italy, has recently been completed. The tunnel is five miles long, 20 feet high and 25 feet wide, and accommodates two lines of rails. The cost of the tunnel was about $7,500,000. The new line will shorten the trip from Milan to Spezia and will prove of special value to travelers from Venice or other cities in the northeastern part of Italy. As Spezia is an important naval station, the new line will prove of great benefit to the government.

Beams and Floors of Concrete.

As the strength of concrete is much less in resisting tensile than it is in compressive stress, its employment for beams has not met with much success. It is true, indeed, that for floors, lintels, staircases, concrete has been used with considerable advantage, as being conveniently handled and placed *in situ*, yet there exists the disadvantage of not being able to test its strength transversely with any degree of reliability. The data furnished by authorities are not generally satisfactory; the proportions of cement and aggregate differences of age and other conditions are varying in the tests given. The proportion of sand is a material factor: the greater the quantity the weaker the result. It is obvious, moreover, that to obtain an approximate estimate of the transverse strength of beams made of concrete, a series of experiments, including a variety of aggregates and ages, would have to be made. One fact is pretty clearly established, and that is that the transverse strength of good concrete is quite equal to, if not greater than, natural stone. To take a few of the tests made with concrete beams supported at the ends: Kirkaldy gives for a beam of 1 of Portland cement and 1 of coke breeze, 7 days old, 3 inches broad, 5 inches deep and 72 inches clear span, loaded at center, an average breaking weight of 3·85 hundredweight, allowing one-half weight of beam between supports 0·22 hundredweight, or a total central load of 4·07 hundredweight; with an aggregate of 2 crushed bricks, 2 or 3 months old, a beam 12 inches by 8 inches deep and 60 inches span, gave in center an average breaking weight of 13·25 hundredweight, and a total center load of 15·08 hundredweight. Another result of a beam of 1 of cement to 0·6 of gravel, 90 days old, 12 inches by 12 inches, 36 inches span, gave an average breaking weight of 46·67 hundredweight on central 6 inches. These are taken at random from a table in Mr. E. L. Sutcliffe's useful book on "Concrete" we lately noticed; but they differ so much in composition, age and scantling that no reliable result can be obtained. It is evident that the addition of sand very considerably reduces the transverse strength, the beam made of neat Portland cement being three times stronger than one of 1 of cement to 2 of coarse sand, the average breaking weights being given as 57·80 hundredweight for the neat specimen and 18·30 for the one with sand.

But we place little confidence in tables of tests, though we gather from them the general fact that good concrete is quite equal, if not superior, to many natural stones for beams, lintels, flooring slabs and other purposes in which transverse strength is necessary. When the ends of concrete beams or slabs are fixed or "pinned" into the wall or built upon, considerably more strength is gained than when they simply rest on the walls. Mr. C. Colson's tests of two beams of concrete 9 feet long, 21 inches wide and 9 inches deep, are instructive in this connection. He placed one of these beams simply resting on supports. At the end of 14 days the scaffolding below was carefully removed, when the beam at once broke with its own weight; the other beam was prevented from spreading by counterforts at the ends, and showed no sign of weakness. After remaining unsupported for 16 days longer, a weight of a quarter of a ton in the center produced a faint crack; with 0·635 ton the crack increased to half the depth. The load was increased to 1·292 tons, when the beam gave way. The experiment at least shows the advantage of preventing spreading or lateral movement. In point of fact, the beam with its ends backed up becomes practically a flat arch, as the crack only appeared on the upper half of the beam, the lower segment of the mass adding nothing to its strength. The same experimenter found by other similar tests that confining the ends of the beam increased its strength nearly three times, and he also proved that flat segmental arches of concrete had great strength. Whatever the value of these experiments may be, they at least establish the assumption that a beam of concrete with its ends securely supported or confined becomes a flat arch, the resistance of the material being mainly compressive and confined to the upper half of the section, within a curve or segmental line from this point of the center to the beds of the beam. In other words, we may imagine a segment struck within the thickness of the lower half or depth of the beam, all below which curve may be cut away. We have a notable example of this fact in the concrete arched floors which spring from the bottom flanges of girders, of which we have instances in Dennett and Ingle's fireproof floors and in those of Homan and Rodgers. When all the four edges of a concrete slab are fixed into walls, as in the case of stair landings and floors, the increase of strength is more than double that in which only two ends are fixed.

It is clear from these experiments that if we can incorporate into the body or mass of the beam or slab iron ties in the lower half of the concrete, we shall greatly add to the strength. Some years ago we remember seeing some beams and floors at Stoke Newington which the late Mr. Allen had introduced, in dwellings let out in flats, in which floors iron tie rods were embedded. Mr. Hyatt, whose treatise we noticed some years ago, inserts iron ties or tension plates in the lower section of his concrete beams, which materially adds to their strength, and the idea of inserting iron rods in the lower half of beams and slabs to assist in the tensile resistance has been greatly developed in several ways. Blocks, soffits, beams, cupolas, and entablatures of concrete, with iron bars introduced, were largely used in the S. K. Art and Science Schools, the details of which are illustrated. One of the first objects was to prevent the rods slipping or drawing through the concrete; but experiments have proved that the iron bars under a considerable strain on the beam preserve their hold when they are left with their natural surface. The use of twisted rods gives a better grip. It has been found that the most advantageous position for the iron tension rod is near the bottom of the beam, and that the ratio of iron rods to the concrete (coke breeze) should not be less than 1 in 20. The tension rods or plates should be so proportioned and at such a distance from the neutral axis of the beam that the compressive resistance of the concrete of the upper half of beam shall not be greater than the tensile resistance of the iron rods. The ratios between these two resistances of concrete vary according to the cement and aggregate used, so that we can only ascertain the sectional area of iron rods required when we know the actual ratio subsisting in a given beam. It is safer to make the iron rods equal to the crushing strength of the concrete, neglecting the tensile resistance of the latter.

The architectural use of concrete for beams, lintels, floors, and as a substitute for stone, has already been tried. In blocks of dwellings, in flats, in which a large number of window heads, door heads, floors, and landings of one type is necessary, the value of concrete is undeniable, and a considerable saving in cost must accrue. More has yet to be accomplished in extending the material constructively. In pier building we may yet hope to see progress made, so that we should not altogether have to rely upon iron stanchions and pillars.

For beams, floors, bressummers, arches, and domes, the combination of concrete and iron promises to yield results even greater than we have seen, when once the practical difficulties of manufacture have been overcome. Whether deposited *in situ* or laid in large flags, concrete has become an important material for town paving, and many manufacturers of artificial stone—like the Victoria stone, the patent artificial sandstone, the granite concrete flooring of W. B. Wilkinson & Co.—have solved the obstacles that were once apparent. For wall building and for architectural purposes the material has not yet appeared to have made much progress, owing to the advantages offered by brick and terra cotta; but for sea, river, dock and quay walls, the value of concrete blocks has long since taken the place of natural stone. For town dwellings the external facing concrete, or slab, offers several advantages, if only architects could adapt this superficial mode of treatment to their wants.—*The Building News.*

Prickly Heat.

Photographers in some parts of the country no doubt suffer from this distressing affection, and will thank "Brown Slick," of the *Journal of the Photographic Society of India*, for the following, according to him, "magical" remedy. He says: "Simply rub the skin with the hand wet with the ordinary fixing solution, and allow it to dry. In a couple of days there will be no trace left of the irritation."

© 1894 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Engineering.

HEATING FEED WATER.—Gregory M. Mullen, Baltimore, Md. This is an improvement in devices by which the feed water is heated by steam and water from the boiler, the water supplied from the pump or other feeder being discharged into the heater, where it circulates and is heated by steam and water fed to the steam and water spaces of the heater, passing to the boiler at a comparatively high temperature. A pipe conducts the condensations in the steam space of the heater back into the boiler in such manner as to partially heat the feed water before it reaches the heater proper.

Railway Appliances.

CAR VENTILATOR.—Alexander A. Miller, Goldsborough, N. C. This improvement not only supplies fresh air to the cars, but also carries off the smoke and cinders from the stack and discharges them at the rear of the train. Near the smoke stack is arranged a fan chamber, from which a pipe leads to cooling chambers in each car, from which valved discharge pipes lead to hooded discharge ends near the car seats. A damper in the smoke stack is arranged to overcome the exhaust blast and cause all the escaping products of combustion to pass into a pipe extending rearward over the cars to the rear end of the train.

FREIGHT CAR DOOR —John J. Mulligan, Vicksburg, Miss. This is a metallic door which, when closed, will closely hug an extension of the door opening, and when opened slightly will hang perpendicularly free from the extension of the door casing, having wheeled and guided action upon the outer surface of the car in such manner as to enable the freight handler to readily expose the entire door opening. Devices are also provided whereby the door, when closed, will be automatically carried to a binding engagement with the extension of the door frame.

CAR DOOR PACKING.—Ferdinand E. Canda, New York City. A novel arrangement of packing tubes and bearing edges, in conjunction with the door frame and door of a car, are made, according to this improvement, to form a durable packing for hermetically sealing the doors of refrigerator cars. When the door is closed the meeting corners of the door and frame present only a narrow edge or ridge to the exposed surface of the packing tubes, and only a slight effort is required to force the door onto its seat, compressing the tubes. The several tubes for one joint are made in the shape of a frame having at one of its sides an inlet opening suitable for connection with an air pump.

Electrical.

COMMUTATOR. — Harry Lee Fee, New Orleans, La. An improved means is provided by this inventor for preventing the short circuiting of coils of armatures where the terminals of the coils are connected with flexible arms extending radially from the commutator wires. The improvement consists in slipping over the free ends of the commutator wires insulating thimbles, preventing contact between the outer ends of the bars, the form of the thimble varying to adapt it to machines of different sizes and kinds.

ANNUNCIATOR SYSTEM. — Alonzo L. Vogt, Delaware, Ohio. This system is based upon the plan of arranging a code of signals for the parties between whom communication is to be held, there being electrical connection, so that the signals may be made by a push button, and is more especially designed for expediting communication between physicians and their patrons, and to insure accuracy in the reception and transmission of written messages and electric calls and signals, as well as to facilitate the filling and prompt delivery of prescriptions for patients.

SUBMARINE MINE FIRING APPARATUS.—Giulio Bertolini, Venice, Italy. This apparatus is designed principally to prevent vessels entering harbors and similar warlike purposes, by the electrical explosion of submarine mines or torpedoes at the required time. It is also adapted for use for the firing of guns on board ship or in a shore battery. The man part of the apparatus consists of an instrument for closing an electrical circuit through any one of several torpedoes or guns with which it is connected by suitable conductors.

COIN-OPERATED TELEPHONE SWITCH.—Charles F. Brown, Yarmouth, Canada. The coin chute, according to this improvement, forms part of the local circuit, as does also a spring stop arm held normally in the path of coin dropped in the chute, and there is a mechanical connection between the stop arm and the gravity switch. On calling the central station and removing the receiver from the gravity switch, a coin dropped in the slot rests against the spring arm, permitting conversation over the line, but when the receiver is replaced on the gravity switch it moves the spring arm and drops the coin into a receiver, leaving the circuit open.

PRECIPITATING METAL SULPHIDES. — Henry Hirsching, Salt Lake City, Utah. This invention relates to precipitating metal sulphide out of a hyposulphite solution, such as hyposulphite of sodium, hyposulphite of calcium, etc., containing precious and other metals, from being in contact with compounds of ores, chloridized, calcined, or raw, by subjecting the insulated hypo solution to the action of an electric current from an external and independent source. The precipitate settles rapidly and the clear hypo solution is used over again in the leaching vats for further dissolution of precious and other metals.

Mechanical.

SCREW CUTTING MACHINE. — Casper W. Mettler, Boonton, N. J. This machine is designed to completely form slotted head screws from a rod or piece of wire in a very rapid and economical manner. The whole operation is automatic, the rod being fed forward and turned down to form a shank, which is then threaded, the head is measured off and the screw grasped by a special device, cut from the rod, and delivered to the slotting device, which cuts the slot in the head and delivers the finished screw to one side of the machine.

WRENCH.—Lewis P. Davidson, Owen, Wyoming. This is a tool of very strong, simple, and inexpensive construction, which may be quickly and conveniently adjusted, and which has shoulders on the locknut by which the distance that the nut must turn cannot be miscalculated.

CONSTRUCTION OF LATHES.—Carl A. Windmuller, Chemnitz, Germany. According to this improvement the slide rest has a guided movement on the bed of the lathe and is provided with a slotted lateral extension to which is hinged a socket, a screw secured to the socket passing through a slot in the extension, and there being a nut for locking the socket in relation to the slide rest. The invention also embraces other novel features connected with machinery or tools for turning shafts, flanges, spheres, cones, wheels, hollow channels, screw cutting, etc., as well as for cutting tooth wheels, planing and shaping.

PORTABLE BORING AND MORTISING MACHINE.—Edward K. Thoden, Brooklyn, N. Y. This is a wood-working machine to be operated by hand power, and adapted for connection to any suitable firm support, the machine being readily separated into parts which may be conveniently packed and carried by a workman. It has a frame plate with attachable and adjustable support for material and a slidable carrier plate, with means of moving and locking it, in combination with an upright reciprocating and inclinable slide bar, with a rocking support therefor, and on which is a rotatable wood-boring device. Connected also with the slide bar is an adjustable arm with rack teeth, operated by a gear wheel and handle lever, there being an adjustable chisel stock on the slide bar.

AIR CUSHION FOR SAW MILL HEAD BLOCKS.—William E. Dean, Ruddock, La. A spring-pressed lever is, according to this invention, pivoted on the head block and a link pivotally connected with the lever, while a dash pot in which works a piston is pivotally connected with the link, a valve controlling the air inlet to the dash pot. The device is simple and not liable to get out of order, but is very effective for relieving the head block carriage and other parts of the mill from the blows or concussions incidental to the canting of the logs toward the knees.

Agricultural.

PLOW.—Frederick S. Moore, Hanford, Cal. This is an improvement upon a formerly patented invention of the same inventor, providing means whereby a shifting device may be quickly and easily applied to a single plow, to shift the beam laterally either to the right or left at the handle end of the plow. With this improvement the line of draught may be instantly changed, and the plowshare made to travel closer to or farther from whatever plants may be under cultivation. The device is very simple and inexpensive.

CIRCLE HARROW.—Hermann Jaenisch, Tschirnau, near Guhrau, Prussia, Germany. Upon the stationary rear crank axle of this machine is mounted a mechanism by which the harrow may be raised and lowered and also inclined relatively to the ground, or the harrow may be held in raised position when being taken from place to place. The driving mechanism is also arranged to alternately raise and lower the harrow while it rotates, any desired inclination being given to the harrow to bring only one part into action when desired, the machine being operated with great facility.

Miscellaneous.

MINCING MACHINE. — Arnold Scheithauer, Berlin, Germany. In this machine the material to be disintegrated is fed along in a casing by a worm or spiral and pressed through a perforated disk. A cross-shaped knife is always pressed evenly against the disk, whether the latter be oblique to the feed screw or not, the boss of the knife being conical or ball shaped, and fitting a recess in the worm around the round pin of the latter, on which the knife and the disks are arranged to give a certain amount of play. The casing is formed in halves, so that the perforated disks may be readily removed to facilitate cleaning.

GATE.—William E. Wieland, Los Pinos, Col. This is a self-closing gate, which is also automatically opened by approaching it, a depressible platform forming the approach. It also has a lock which prevents its being opened except when a certain part of the mechanism is touched. The gate is made without springs, and has provision for excluding snow or rain from the operating mechanism. The gate and its mechanism are sustained by a suitable frame resting upon foundation beams, but without posts entering the ground.

INVALID BED.—Joachim Eggert, Berg, Island of Femern, Prussia, Germany. The head and foot boards and side rails of this bedstead may be of the ordinary form, but in the bed bottom or support is a central opening in which is arranged a sliding bottom section, facilitating the giving of needed attention to an invalid, and the patient having substantial support without changing the natural position.

BILLIARD TABLE, BOOKCASE AND DESK.—Sterne A. Faribault, Elsdon, Ill. This is a combination article of furniture, of such design that it can be afforded at a very moderate cost. When the bookcase is erect, the case and desk may be used in the ordinary way, but by tipping the case downward and leveling it in a manner provided its back may be used as an ordinary billiard table, being made perfectly smooth and covered in the usual way.

FOLDING STAND.—Thomas A. Clarke, Chicago, Ill. A stand which may be readily set up or knocked down and folded to be packed in small space has been designed by this inventor. It is more especially designed for use in hotels or stores for exhibition purposes.

FOLDING FOOT BENCH.—Albert Epstein, Breslau, Germany. This is a simple article of furniture comprising a board composed of hinged sections and detachable tapered legs which may be slid one into the other, the board having on its under side means for securing the upper ends of the legs, and leg-receiving recesses which entirely inclose the legs in folded position, so that in the folded state the exterior surfaces of the bench will be substantially smooth.

PAPER FILE.—Moritz Kragen, Berlin, Germany. In the filing case or portfolio provided by this inventor there is in the back or cover a pad having a penetrable facing and an impenetrable under layer, to hold documents, etc., in combination with pins, the latter being held between the facing and under layer, and so that they cannot penetrate the back or cover.

ATTACHMENT FOR MUSICAL INSTRUMENTS.—Michael J. Betz, Philadelphia, Pa. This device comprises a sliding button engaged by the free end of a flat spring secured on the under side of the bridge, and on which is pivoted a finger piece, the latter carrying a flexible finger adapted to pick a single string or a number of strings forming the desired chord. The improvement is applicable to zithers and similar instruments, permitting the performer to sound the chords for accompaniments, etc., without striking the individual strings with the several fingers of the hand.

GOODS EXHIBITOR.—Daniel B. English and Stephen H. Hinnant, Way Cross, Ga. A suitable case is arranged with drawers one above the other, there being rollers journaled in the drawers and outlets at their front, where display racks are provided, each projecting slightly farther from the front of the drawer than the next upper rack, the racks being composed of inner and outer rods or bars. The case is especially designed for keeping and exhibiting dry and fancy goods, as laces, edgings, embroideries, ribbons, etc.

COLLAR AND COLLAR STIFFENER. — Stephen D. McElroy, New York City. A shell made of linen or other fabric is made the desired shape of the collar, according to this invention, and the lower edge of the shell is left open, forming a compartment to receive a stiffening plate of sheet metal, cardboard, celluloid, or other material to retain the shell in proper shape. When the collar is to be washed the stiffening plate is removed, the shell only being washed.

REFLECTING PROPERTIES IN JEWELRY, ETC.—Joseph Esser, Barmen, Germany. To produce light-reflecting properties, according to this invention, a pattern is produced on a reflecting foundation plate, different parts of which differently reflect the light, while a transparent cover plate is likewise provided with a pattern and placed on the reflecting surface. The base plates may be made of aluminum, silver, etc., and the cover plates of celluloid, horn, tortoise shell, amber or tracing cloth. The invention is particularly adapted for the production of buttons and articles of bijoutry.

ATTACHABLE FILTER. — Thomas C. Andrews, New York City. Whether a hydrant nozzle or water tap is exteriorly threaded or is smooth, this filter is readily attachable thereto, and is designed to effectively cleanse and deodorize water passing through it. It has a removable cover, a central screen cup, and concentric porous cup filled with silex, there being a perforated disk above the porous cup, while the case is packed with granulated charcoal. Connection is made with the water faucet by a yielding ferrule insertible in the neck of the filter cover.

OPENING LEVER FOR BAIL STOPPERS.—William Noe, Marconnier, N. J. This lever has a forked outer end to receive the bottle neck, and loop-receiving recesses in the arms. It is a very simple device for application to the bail of a stopper to force the latter from a bottle without applying the fingers or hand to the bail.

VENT PEG FOR BEER CASKS, ETC.—John P. Harding, London, England. A rotary plug valve is combined with this peg, the valve being normally turned to closed position by a spring, and being tapered and held to a tapered seat by another spring which permits the plug to be raised by excessive internal pressure, the self-closing and self-opening motions being quite distinct, the latter taking place only to relieve too high gaseous pressure generated in the cask by continued fermentation.

BUILDING BLOCK. — Octavius B. Schmall, Cincinnati, Ohio. These blocks are interlocking and have each a longitudinal series of ducts and parallel key slots across their ends between the ducts, keys being fitted in such ways to interlock the adjoining ends of the blocks and form partitions between the ducts. These blocks are adapted to form walls of buildings, underground conduits, pavements, etc., when used in buildings, improving their sanitation and increasing the lateral strength of the walls, as well as affording ready means of forming electrical or other conduits.

MAGIC TOY.—Ross Armstrong, Onawa, Iowa. To magically illustrate the coining of money from blanks, as a source of amusement, is the object of this toy, which consists of a die in the form of a drop bottom adapted to receive the blank, there being a coin receptacle over the die to trip it, remove the blank and deposit a coin in its place.

NOTE.—Copies of any of the above patents will be furnished by Munn & Co., for 25 cents each. Please send name of the patentee, title of invention, and date of this paper.

NEW BOOKS AND PUBLICATIONS.

STANDARD TABLES FOR ELECTRIC WIREMEN, WITH INSTRUCTIONS FOR WIREMEN AND LINEMEN, UNDERWRITERS' RULES, AND USEFUL FORMULÆ AND DATA. By Charles M. Davis. Fourth edition, thoroughly revised and edited by W. D. Weaver. New York: The W. J. Johnston Company, Ltd. 1893. Pp. 128. Price $1.

This book is altogether a practical one. The fourth edition having been reached, in spite of the lamented death of the author, indicates its value. To make it still better in the future, suggestions from those using it are cordially invited by the publishers. A short index and a number of very clear diagrams of different elements of electric lighting are given.

THE CORLISS ENGINE (by John T. Henthorn) AND ITS MANAGEMENT (by Charles D. Thurber). Edited by Egbert P. Watson. Third edition, enlarged. With an appendix. By Emil Herter. New York: Spon & Chamberlain. London: E. & F. N. Spon. 1894. Pp. 95. Price $1. No index.

The fact that this little work has reached its third edition and is enlarged speaks well for its acceptability to engineers. It is a short, concise work, quite practical, and while its title would indicate its limitation of subject, much that is in it will be found applicable to general engineering practice. Its value would be greatly enhanced by an index.

BOOKKEEPING AT A GLANCE. By J. T. Brierley, A.C.A. New York: Excelsior Publishing House. Pp. 141. Price 75 cents.

We quote from the title page an abstract of what this work contains: "Instructions for the correct keeping of books of accounts, and numerous explanations and forms used in a commercial business, showing an entire set of books based upon actual transactions, how to take off a trial balance sheet, and finally close and balance accounts." This shows that the author claims to have produced what must be a very serviceable little work, and we are convinced that it will be found such. A peculiar thumb index is supplied to enable instant reference to the desired parts, whose titles are stamped on the cover. This is a most excellent and useful feature.

PIGMENTS, PAINT, AND PAINTING. By George Terry. London: E. & F. N. Spon. New York: Spon & Chamberlain. 1893. Pp. xi, 392. Price $3.

The composition of the different paints in use by painters, embracing the consideration of a large variety of the same, their examination for quality, the subjects of vehicles and driers for paint, of machinery and painting proper, are the topics treated by our author. the result being the production of a very satisfactory and useful book, telling one what the different trade colors are made of, how they are made and what uses and qualities are the result. Such a work written up to day and date and in a scientific manner has, to a certain extent, been needed, and we believe that Mr. Terry has done technology a service in his compilation.

☞ Any of the above books may be purchased through this office. Send for new book catalogue just published. MUNN & Co., 361 Broadway, New York.

SCIENTIFIC AMERICAN BUILDING EDITION.

JANUARY, 1894.—(No. 99.)

TABLE OF CONTENTS.

1. Elegant plate in colors showing a suburban dwelling at Bridgeport, Conn., recently erected for L. D. Plumb, Esq., at a cost of $4,500 complete. Floor plans and perspective elevation. An excellent design. Mr. C. T. Beardsley, architect, Bridgeport, Conn.
2. Plate in colors showing the residence of Thomas C. Wordin, Esq., at Bridgeport, Conn. Two perspective views and floor plans. Cost $3,600 complete. Mr. Joseph W. Northrop, architect, Bridgeport, Conn.
3. A colonial dwelling erected for Philip Lucas, Esq., at Mount Vernon, N. Y. Perspective and floor plans. An excellent design. Cost $7,000 complete. Mr. Louis H. Lucas, architect, Mount Vernon, N. Y.
4. A cottage at Cranford, N. J., erected at a cost of $5,000. Floor plans, perspective view, etc.
5. Engravings and floor plans of a suburban residence erected at Brookline, Mass. Mr. E. L. Rodgers, architect, Boston, Mass. A very attractive design.
6. A dwelling recently erected at Elizabeth, N. J., at a cost of $5,500. Floor plans and perspective elevation. Mr. J. E. Baker, architect, Newark, N. J.
7. A new frame schoolhouse at Elizabeth, N. J., erected at a cost of $16,000 complete. Elevation and floor plans. Messrs. Charlock & Howard, Elizabeth, N. J., architects.
8. A dwelling recently erected for W. E. Clow, Esq., at Buenna Park, Chicago, Ill. A picturesque design. Two perspective views and floor plans. Mr. Greg Vigeant, architect, Chicago.
9. A town library of moderate cost at Colchester, England. Perspective view and plans.
10. A house at Cambridge, Mass., erected at a cost of $6,000. Mr. J. T. Kelly, Boston, architect. Perspective and floor plans.
11. Restoration of the Pantheon at Rome. Half page engraving.
12. Miscellaneous Contents: A rival to oak.—Seaside painting.—Miscellaneous weights.—Water tanks.—Improve your property.—Cement.—Peruvian ruins.—Ornamental iron and brass work, illustrated.—Facts for builders.—The Goetz box anchors, post caps, and hangers, illustrated.—Improved gas grate, illustrated.—Improved drawing instruments, illustrated.—Climax gas machine, illustrated.—Improved square chisel, mortiser, and borer, illustrated.—Adamant brush finish.—Patent stair gauge, illustrated.

The Scientific American Architects and Builders Edition is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural Publication in the world. Sold by all newsdealers. MUNN & CO., PUBLISHERS, 361 Broadway, New York.

© 1894 SCIENTIFIC AMERICAN, INC.

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in the following week's issue

"U. S." metal polish. Indianapolis Samples free.

Wood pulp machinery. Trevor Mfg. Co., Lockport, N.Y.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Nickel-in-slot machines perfected and manufactured Electrical supplies, Waite Mfg. Co., Bridgeport, Conn.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York.

A handsome souvenir will be mailed free on application to Wm. Jessop & Sons, Limited, 91 John St., N. Y.

Centrifugal Pumps for paper and pulp mills. Irrigating and sand pumping plants. Irvin Van Wie, Syracuse, N. Y.

Air compressors for experimental purposes. 300 lb., $50. Clayton Air Compressor Works, 45 Dey St., New York.

Carborundum — hardest abrasive known. Send for prices of wheels, powder, etc, The Carborundum Co. Monongahela, Pa.

Emerson, Smith & Co., Ltd., Beaver Falls, Pa., will send Sawyer's Hand Book on Circulars and Band Saws free to any address.

Split Pulleys at Low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

The "Olin" Gas and Gasoline Engines, from 1 to 10 horse power, for all power purposes. The Olin Gas Engine Co., 222 Chicago Street, Buffalo, N. Y.

Party having new U. S. and Can. pats. wants business partner in manuf. and for sale of rights. Staple goods. Solid business. G. H. Gere, Grand Rapids, Mich.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4; Munn & Co., publishers, 361 Broadway, N. Y.

Patent Electric Vise. What is claimed, is time saving. No turning of handle to bring jaws to the work, simply one sliding movement. Capital Mach. Tool Co., Auburn, N. Y.

Competent persons who desire agencies for a new popular book, of ready sale, with handsome profit, may apply to Munn & Co., Scientific American office, 361 Broadway, New York.

Are you Hard of Hearing or Deaf?
Call or send stamp for full particulars how to restore your hearing, by one who was deaf for thirty years. John Garmore, room 18, Hammond Building, Fourth and Vine, Cincinnati, O.

Wanted - Financial assistance to patent in the U. S. and foreign countries a new cable system of street car propulsion. Liberal interest in patents given to right party. For particulars, address "Propulsion," care Scientific American, New York.

☞Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.
References to former articles or answers should give date of paper and page or number of question.
Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.
Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.
Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.
Scientific American Supplements referred to may be had at the office. Price 10 cents each.
Books referred to promptly supplied on receipt of price.
Minerals sent for examination should be distinctly marked or labeled.

(5752) C. E. H. asks: I am annoyed constantly with the odor of gas from the ordinary rubber tubing, such as dentists use in laboratory work. Can you suggest a coating for the tubing which will prevent the leakage? A. Possibly inside and outside treatment with shellac varnish would help it.

(5753) L. R. A. asks: 1. I wish to obtain an ink that will be visible for four or five days and then fade entirely away and cannot be restored in any way to vision. What liquid is a solvent for iodo starch? A. Water. 2. If I take an apparatus used for electrolysis which is constructed of a U tube, the ends of which are sealed, and if this current is kept up, the volume of the gases must of course be contracted, for their volume is much greater than that of the H_2O. Will this pressure interfere with the action of the electricity in any way? A. The gases will continue to accumulate until the apparatus bursts? The pressure will not interfere with the electrolysis.

(5754) S. says: Please inform me what is the meaning of three balls over a pawnbroker's shop. A. Money to let. It is derived from the Lombard merchants who used the three balls as a sign. It was also used by the Medici family in Florence.

(5755) B. W. S. asks: 1. Would there be any material difference in winding the induction coil like a spool of thread, insulating each layer with a brushing of paraffine and covering of bond paper, than there would be in the method described in "Experimental Science"? A. Yes. Disk winding is preferable. 2. As an insulator for static currents is shellac better than paraffine or resin? A. It is better than resin and inferior to paraffine. But their relations are affected by impurities, so that for some samples other relations may obtain. 3. What is the maximum primary current that is safe to use with that coil, considering the heating by Foucault currents and the liability of the paraffine to melt? A. You need not fear Foucault currents with the wire core. 4. Would it be a serious shock to allow the current to pass through one's body, similar to the experiments with a frictional machine? A. The coil gives quite a severe shock.

(5756) R. P. E. asks: What power would a spring of water, flowing 40 gallons per minute, with a a fall of 500 feet at two miles from the spring, give? A. By using a 4 inch pipe you can realize four horse power with an impact wheel of the Pelton type.

(5757) O. H. asks: 1. What is the cost of obtaining a knowledge of electrical engineering? Also civil? A. No estimate of cost can be given. Address Armour Institute, Chicago, or Mass. Institute of Technology, Boston, Mass., Cornell University, Ithaca, N. Y., giving courses in both civil and electrical engineering, for their catalogues. The same education will cost one man thousands of dollars and another man almost nothing beyond his time. 2. How long does it take to complete a course of the study in them? A. The college course alone is three or four years. The preparatory course takes one to three years, and after graduation the study should fill a lifetime. 3. What are the prospects for a first class engineer of either branch? For a first class man the prospects are good; but the professions are overcrowded. Few men are really first class.

(5758) H. E. H. asks how to make a storage battery capable of running four 16 candle power 70 volt lamps one hour; also how many gravity batteries will it take to charge the same? A. The manufacture of a large storage battery is attended with so many difficulties that we do not advise it. One is described in the SCIENTIFIC AMERICAN; also see our SUPPLEMENT, Nos. 838, 845, 931. For each storage cell over two gravity cells in series must be provided, and almost any quantity in parallel. As you need 36 storage cells, several hundred gravity cells would be needed.

(5759) C. L. S. asks: 1. How to make a camera obscura. I want one to copy landscapes with from nature. A. See our SUPPLEMENT, No. 158. 2. Also one to enlarge photographs, both by sunlight and lamplight. A. See our SUPPLEMENT, Nos. 276 and 451. 3. What can I apply to windows that makes beautiful large crystals on it? A. Sodium sulphate in hot solution.

(5760) A. S. asks: Supposing a distillery warehouse, in which whisky or spirits are stored, is heated to a temperature of 100° and kept closed for a period of a few weeks, would there be any danger of an explosion from the consequent evaporation of spirits, should some one strike a match or enter with an uncovered light? What percentage of alcoholic vapor in the atmosphere of a warehouse would be likely to cause an explosion? A. There would be such danger. One part alcoholic vapor to thirty to sixty of air would be explosive.

(5761) L. D. M., P. W. T., and many others, say: Please give me a receipt for making a good ink for rubber stamps. Also one for making a good indelible ink for name stamps. A. The usual rubber stamp inks are prepared with water-soluble aniline colors and glycerine.

1. Blue rubber stamp ink:

Aniline blue, water sol., 1 B.	...	3 parts.
Distilled water	10	"
Pyroligneous acid	10	"
Alcohol	10	"
Glycerine	70	"

Mix them intimately by trituration in a mortar. [The blue should be well rubbed down with the water, and the glycerine gradually added. When solution is effected, the other ingredients are added.]

Other colors are produced by substituting for the blue any one of the following:

2. Methyl violet, 3 B		3 parts.
3. Diamond fuchsin I		2 "
4. Methyl green, yellowish		4 "
5. Vesuvin B (brown)		5 "
6. Nigrosin W (blue black)		4 "

7. If a bright red ink is required, 3 parts of eosin BBN are used, but the pyroligneous acid must be omitted, as this would destroy the eosin. Other aniline colors, when used for stamping ink, require to be acidulated. 8. The ordinary stamping ink, made by diluting printing ink (which is made of lampblack and linseed varnish) with boiled linseed oil, stands pretty well, if enough is used, but when poorly stamped, will wash off. Dr. W. Reissig, of Munich, has recently made an ink for stamps which is totally indelible, and the least trace of it can be detected chemically. It consists of 16 parts of boiled linseed oil varnish, 6 parts of the finest lampblack, and 2 to 5 parts of iron perchloride. Diluted with ½ the quantity of boiled oil varnish, it can be used for a stamp. Of course it can only be used with rubber stamps, for metallic type would be destroyed by the chlorine in the ink. To avoid this, the perchloride of iron may be dissolved in absolute alcohol, and enough pulverized metallic iron added to reduce it to the protochloride, which is rapidly dried and added to the ink. Instead of the chloride, other salts of protoxide or peroxide of iron can be used. From the "Scientific American Cyclopedia of Receipts, Notes, and Queries."

(5762) H. C. S., Iowa, asks what to put in boilers to prevent the formation of a carbonate of lime scale. The water here contains considerable lime and forms a very hard white scale, which I would like to know some way to prevent. A. You cannot prevent the deposit of scale, except by the use of pure water. It can be softened and removed by the application of a half pound of caustic soda to the feed water once a week, two weeks or a month, according to the amount of scale forming. Boil the caustic in the boiler for the working day, then blow down and clean out the boiler. After once thorough cleaning a little caustic every few days and blowing down two cocks a few times the next day will keep the boilers in good order for two or three months when they should have a thorough cleaning.

(5763) C. H. S. asks: 1. How many watts does it take for a 1 candle power? A. 2½ to 3½ watts in an incandescent lamp. 2. Can you give me the drawings or sketch, so that I can make an outfit to put on cart wheel, so that it will register the number of miles traveled? A. Odometers can be bought of dealers in surveying instruments. Consult our advertising columns. 3. Have you "Dynamo Electricity," by Carl Hering? A. We can supply it by mail for $2.50.

(5764) D. S. C. says: Making an allowance of ⅛ for friction how heavy should a weight be to fall 20 feet and furnish ⅛ horse power for one hour of time? 2. It will require a weight of 139,320 pounds. 2. Respectively, what is the horse power of a 10 foot, also a 12 foot wind wheel in an 18 mile wind?—of course the wheels are to be first class, and are supposed to be held squarely in the wind. A. The 10 foot mill should equal one-fifth of a horse power, 12 foot mill, one-quarter of a horse power, in an 18 mile per hour wind.

(5765) W. McV. writes: 1. What is the resistance of a 6×8 Crowfoot gravity battery? A. About 4 ohms. 2. What is the E. M. F. of a battery with plates of carbon and iron? What is the E. M. F. of a battery with plates of copper and iron? A. It depends on the solution. From ½ to 1 volt perhaps. 3. What is the E. M. F. of a thermo couple composed of iron and copper, also iron and zinc, and copper and zinc for a difference of 100° Fah. in temperature between the ends of the couples? A. The relative differences of potential are iron-copper 6·2, iron-zinc 5, zinc-copper 1·2. We cannot give the exact voltages, and the above can only be considered an approximation. 4. Please mention some good work on thermo-electricity and its cost. A. We can supply Rust's "Thermo-Electricity," 78 cents by mail. 5. Are the natives of the Sandwich Islands negroes, or Indians, or neither? A. Neither. They are of the great Malay race.

(5766) J. N. F. writes: I would like to know the exact number of inches and fraction that a body will fall in still air the first second of time. The philosophy states that a body will fall without resistance 16 feet 1 inch the first second. The encyclopedia states that it will fall 16·1 feet the first second. Which is correct? What does "without resistance" mean, in still air or in a vacuum? A. The distance varies with difference of location. On the equator a body falls a less distance than at the poles. Without resistance means in a vacuum.

(5767) F. M. C. asks: In a ball bearing of a bicycle, which will run the easiest by applying the least power? I mean one with eight five-sixteenths balls or one with eight one-quarter inch balls? What effect would increasing the number of balls have? A. There should be no difference of any amount between the sizes named. A rough surface for the balls to roll upon would make the larger balls superior to the small ones. Increasing the number of balls would have little or no effect.

(5768) G. B. asks: 1. How would electricity compare to gas at $2 per M for cooking purposes in regard to cost? A. 50 watt hours would heat a maximum of 175 pounds of water one degree Fah. This is the most you could do with electricity. In practice it would be much less. Gas would be far cheaper. 2. Is it practicable for cooking in a private house, and would it be an expensive means? A. Yes; it is practicable, but expensive.

(5769) A. M. G.—The following is a receipt for stereotyper's paste. To 1½ gallons water add 2½ pounds of Peter Cooper's glue. Allow to stand overnight, after which place it on the fire and cook slowly for two hours. Take ½ pound of best English Paris white and one pint of flour, packed tight in the measure. Place them together in a basin and add sufficient water to make the mixture the consistency of buttermilk; add this to the glue when cooked as above, and allow the whole to cook for one hour, when it will be ready for use.

(5770) T. P. A. asks: 1. In using the earth as part of an electric circuit, what is the resistance per mile? A. The resistance is zero. There is resistance at the grounding points, varying according to the nature of the soil and area of ground plates or equivalents. 2. Will a straight electro-magnet, wound with very fine wire, operate a bell (only one end of the magnet to be used to attract the armature) through a line one mile, with ground return, and using one sal ammoniac battery? If not, how many batteries would be required? A. A very feeble ring could be thus produced. Five or six cells would not be too many. The resistance of the circuit and quantity of current required to ring the bell determine the cells needed.

(5771) G. L. R. asks for the best fluid batteries for operating electro-motors under one-eighth horse power. A. The bichromate batteries, Bunsen or plunge type, See SUPPLEMENT, 792, are the best of the primary batteries. Secondary batteries are preferable and are far more economical. See SUPPLEMENT, Nos. 838 and 845.

(5772) A. M. H. asks: Cannot a "coil" be put into a kitchen stove for the purpose of heating another room, on the principle of the article on "Combined Water Heating and Hot Air Furnaces," described in SCIENTIFIC AMERICAN, page 19, January 13, 1894? Could not the pipes used to heat water for kitchen and other purposes be used to heat air for another room? A. The heating of a room above the kitchen can be done by a coil in the stove and a suitable radiator coil in the room, with an expansion tank above, on the same principle as in greenhouse heating. The water from a kitchen boiler can also be circulated in a coil above for heating purposes.

(5773) C. D. asks: 1. What are the elements and exciting acid in a chloride of silver dry cell? A. Metallic silver and zinc are the electrodes, silver chloride the depolarizer, and ammonium chloride solution the exciting fluid. 2. Can such cells be recharged, and how? A. They can be cleaned out and new silver chloride and solution introduced. 3. What is the voltage and amperage of a cell 2 inches long and ¾ inch wide? A. E. M. F. 1·03 volts. The amperage cannot be exactly stated—perhaps ½ ampere at first.

(5774) G. W. C. asks: 1. How many storage batteries will a 25 volt 8 ampere dynamo charge, and how long would it take? A. It depends on the size. It will charge eleven in series, each having 200 square inches area of positive plate. 2. What is the voltage and amperage of simple electric motor used with cast iron fields? A. 7·2 volts and 4 amperes for field. The armature can absorb 5 amperes at 7·2 volts. 3. Will the SCIENTIFIC AMERICAN give me a comprehensive description of the Niagara formation, also of the rocks of the Upper Silurian period? A. The Niagara formation is the first period of the Upper Silurian. It includes the Oneida conglomerate, shaly sandstones of the Medina group, hard sandstones, flags and shales of the Clinton group, and shales and limestones of the Niagara group. The Upper Silurian includes four periods—the Niagara as above, the Salina, Lower Helderberg, and Oriskany. The Salina rocks are sandstones and shales; the Syracuse, N. Y., salt wells derive their brine from rocks of this period. The Lower Helderberg rocks are mostly limestones. The Oriskany beds are rough sandstones. The Niagara and Lower Helderberg rocks abound in fossils, radiates, trilobites, brachiapods, and other mollusks. The above refers to the American rocks.

(5775) C. T. V. writes: Can you give me a diagram of a circuit using the multiple system, where, by placing a push switch in hall of first floor, a lamp on second floor can be lighted, and upon arriving at the top the lamp can be extinguished, and then by going down stairs again you can go through the same operation without having made any change? A. The diagrams show how this can be done. In A, the lamp

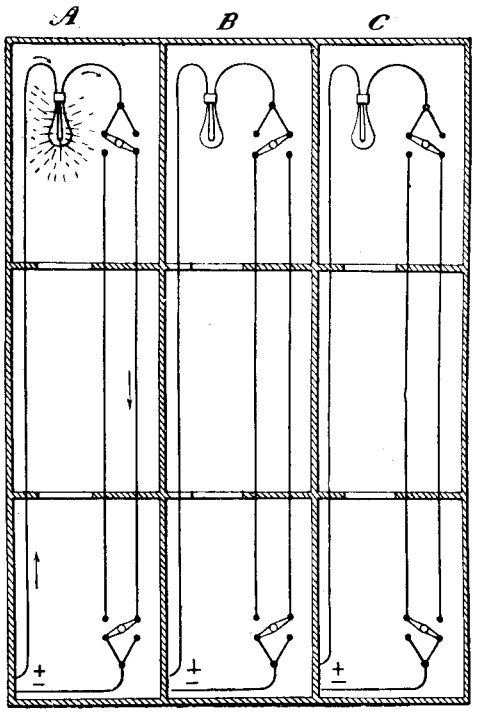

has been lighted from the lower floor. In B, it has been turned out from the upper floor. In C, it has been turned on below and then turned off above, leaving it out finally. By this arrangement it can be turned on and off from either floor.

(5776) A. C. C. writes: I have use for a reversible electric motor that I could run with two or three gravity batteries. Will you give me some light on this subject? A. Construct exactly as an ordinary motor, but arrange a pole changer so as to be able to change the direction of the current in the armature alone or in the field magnet alone. By changing the direction of current in one of these, only the motor will reverse. Use carbon brushes, pressed end on by springs against the commutator. Make connecting bar of a non-conductor. The cut

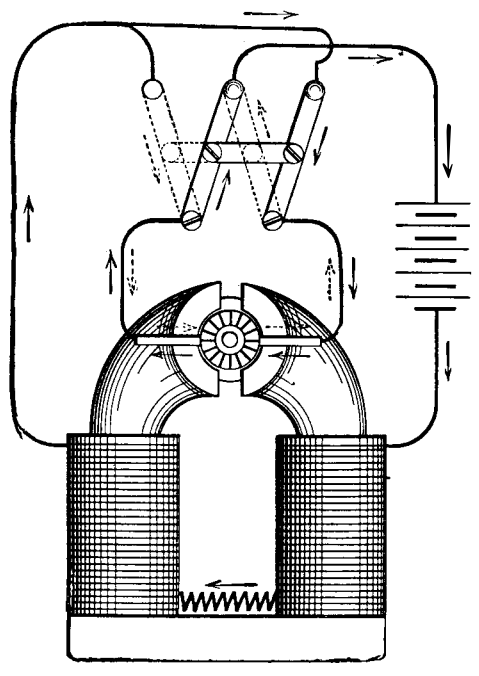

gives the connections necessary for a reversing motor. You must let it come to rest before reversing, as otherwise there is great danger of burning out the armature.

(5777) F. H. W. writes: 1. I have constructed the motor of which drawings are given in SCIENTIFIC AMERICAN SUPPLEMENT, No. 641. I wish to construct plunge battery to run same. Will you kindly inform me what size cells to use, how many, and also how to connect them? A. The dimensions of the proper battery are given in the article in SUPPLEMENT, No. 641. For description of a plunge battery, we refer you to our SUPPLEMENT, No. 792. 2. Will the same rules apply in regard to winding for 110 volts? What number of wire on field, and also what number and amount on armature? A. See answer to query 5692. You need not use No. 32 on the armature—No. 29 would be fine enough. Always use a rheostat in starting the motor.

(5778) D. & C. write: 1. We are building simple electro-motor described in SUPPLEMENT, No. 641, to run from a 110 volt incandescent circuit. Should any change be made in winding of fields or armature? A. See query No. 5692. You may use No. 29 wire on armature. 2. What power will said motor develop on

© 1894 SCIENTIFIC AMERICAN, INC.

above circuit? About how many revolutions will it make per minute with full load? A. This is uncertain—about one twelfth horse power. Revolutions, about 2,000 per minute. 3. By introducing into the above circuit a rheostat, could not current be used for electroplating? How many volts and how many amperes does it require to run about 50 gallons of plating solution? A. Yes; but at enormous loss in economy. The voltage and amperage for plating depend on size of work and on the metal being deposited. 4. What is the resistance of German silver wire, No. 26 A. W. G., per foot? Would above size carry 110 volts without heating? A. About 542 ohms per 1,000 feet. The voltage required to melt it depends on its length. 5. Do you know of any work on buffing and polishing? If so, where can it be obtained? A. We recommend and can supply Langbein's "Electro-Deposition of Metals," which contains information on buffing and polishing. Price $4.

(5779) W. K. asks: 1. Is it necessary to strip the nickel from old work in order to replate it, and if so how can it be done? A. Stripping is absolutely essential. A bath of two volumes of sulphuric acid to one of nitric acid in one volume of water may be used. Use cold, and remove the article the instant the nickel is gone. This may be in a second or two. Or an old nickel bath may be used, making the article the anode. Remove quickly as the nickel disappears. 2. In the nickel solution which I have, when I added ammonia, a yellow, powder-like substance settled on the bottom of the tank. Will you please let me know what caused that; or is, perhaps, the solution out of order? A. Possibly your bath contained some impurities, such as iron. The bath should be neutral, or a shade acid.

(5780) J. L. L. asks: Can you please tell me how many Fuller cells are required to run a motor, and also what candle power lamp can be run by 5 Fuller batteries? A. Allow two watts utilizable energy for each cell. Thus 5 cells should run a 3 or 4 candle power lamp. For battery required for special motors, address the dealers or agents for same.

(5781) C. K. asks: 1. Which of the following will produce the strongest current: A pile (No. 1) constructed by placing upon a disk of copper a disk of cloth, moistened with acid, and upon this a disk of zinc, and upon this a disk of cloth moistened with acid, repeating this order indefinitely; or a pile (No. 2) where copper and zinc plates are placed together in pairs and cloth, moistened with acid, is put between each pair of plates. I would like to know particularly whether, in this pile, the zinc may be amalgamated on that side which lies directly upon the copper without interference to the current? A. The second method is the proper one. You may amalgamate the zinc plates on both sides. The zinc and copper plates may be soldered or sweated together. 2. What kind of a fluid is best for the cloth disks? A. Dilute sulphuric acid, 1 acid to 10 of water, may be used. The cloth disks should be a little less in diameter than the metal plates, and must have just enough acid. If too much, it will squeeze out and run down the outside of the pile.

(5782) J. R. S. asks: 1. Have you plainly described in any SUPPLEMENT the manufacturing of a dynamo suitable to run three 16 candle power electric lights? A dynamo that I could make from the instructions given, and if so, at what cost could it be made? A water motor, developing three horse power under a pressure of 70 pounds, after the pattern of a revolving lawn sprinkler. I would like to build a dynamo to be run by this motor to light three 16 candle power electric lights. What would the same cost, and what difference in cost between one capable to run three and one to run six of these lights? A. In our SUPPLEMENT, No. 844, a five light dynamo is described. For three lights it should be 92-100 of the size. The cost you can easily calculate from the very full description given. 2. What is the probable amount of water used per hour by this motor? A. This class of motor will require 18,000 gallons per hour for three horse power, at the pressure named. 3. How does a 16 candle power electric light compare with an ordinary kerosene light, with single wick 1¼ inches wide? A. The oil lamp in good condition should give 25 per cent more light.

(5783) L. D. W. asks how far a transmitter will work having a permanent magnet 6 inches long by ⅜ inch in diameter, encircled at one end by a bobbin of wire having 75 ohms resistance, and using a regular iron diaphragm. A. It depends on the resistance and other electric qualities of the circuit. It should operate on a metallic circuit ten miles or more in length.

(5784) J. C. S. asks: 1. How could I make an electric motor capable of running a sewing machine? A. For electric motors of simple construction see our SUPPLEMENT, Nos. 641, 759, 761, 767. 2. How many Leclanche or Grove cells would be necessary to furnish sufficient current? A. Leclanche cells are not suited for the work. Grove cells emit gas. Use a plunge battery, such as described in our SUPPLEMENT, No. 792.

(5785) W. H. McC. writes: 1. Would No. 28 thread be fine enough for winding the No. 36 wire on the induction coil in "Experimental Science"? A. No. 36 wire is $\frac{1}{1000}$ inch in diameter; so your thread would be very coarse for the purpose. 2. I am also building the SCIENTIFIC AMERICAN dynamo, and have fifty-two feet No. 18 double cotton-covered wire (to use on field) instead of the single-covered. Will it not do as well? Will I have to put on more than the twelve layers to make up for the extra insulation? If so, how many more layers? A. Use the same weight of wire as given, or a little more. It is all a question of close winding. 3. Cannot the armature be wound the same as the eight-light machine and give good results? A. We advise you not to depart from the instructions.

(5786) J. J. R. asks: 1. How do opticians produce the beautiful different colors on their brass works of microscopes and other instruments, especially the shining gold color? A. For lacquering and coloring metals, we refer you to the "Scientific American Cyclopedia of Receipts, Notes and Queries," which contains many receipts for the same and directions for applying. Price $5. 2. Is the brass heated when lacquered, and if so, to what heat? A. Yes. The heat is about that of boiling water, and the piece must be absolutely clean. A finger touch before lacquering will injure it. 3. Is it possible to make cables containing 80 to 100 insulated copper wires? How heavy would the cable have to be to secure satisfactory insulation for every wire? A. Yes. Telephone cables about 1½ inches outside diameter are examples. The size of the cable depends on the size of the wires and on the thickness of their insulation.

(5787) V. H. T. asks: 1. How far away could you get effects from an alternating current actuated by about 1,000 volts potential? A. Several miles, if the conditions are good. In this way it is possible to telegraph without wires. Preece, in England, has done some interesting work in this line. See SUPPLEMENT, 926; for other valuable papers on the subject see Nos. 790, 861, and 925, also SCIENTIFIC AMERICAN, No. 3, vol. 66. Voltage has no direct connection with it. The amperage is the operative factor, and this depends on voltage and resistance. 2. What proportion of such current would you get by induction in a circuit 50 feet away? A. A very small portion. You might approximate it by dividing the length of a circle of 50 feet radius by the diameter of the receiving device.

(5788) J. F. D. asks: How much will a steel tape of 500 feet leugth expand or contract from the change of 1° temperature (Fahrenheit scale at 60°), and how much from the change of 1° temperature (Fahrenheit at 170°)? A. For 1° Fah. at either temperature allow an expansion of $\frac{1}{148000}$ of its length. This will not be accurate, as different samples vary widely. For 500 feet this gives $\frac{5}{140}$ inch.

(5789) T. H. P. asks: 1. Would a gravity battery be the best style for a current to be used to energize an electro-magnet for periods of one second, each at intervals of one second, this interrupted action to be continuous? A. The battery would be excellent as regards its constancy; not so much so as regards strength of current. 2. Can you refer me to some work, article or articles on clocks actuated by electricity (not merely regulated)? A. For information on electric clocks we refer you to "Domestic Electricity for Amateurs," price $2.50 mailed. 3. What is the origin and date of origin of the so-called Hero's fountain? Has any striking example of it been exhibited in modern times? A. It is attributed to Hero of Alexandria, a philosopher who lived in the third century B.C. No very striking example can be cited. See SUPPLEMENT, No. 404.

(5790) W. V. G. asks (1) the address of a storage battery manufactory. Can storage battery be recharged from an Edison-Lalande battery, four cells, both batteries being 300 ampere hours, the storage being 2·5 volts? If so, how long will it take? A. Allowing 0·667 volt for a single cell of Edison-Lalande battery, it would require $\frac{2 \cdot 5}{0 \cdot 667} \times 1\frac{1}{8}$ or about 5 such cells. You do not correctly specify the Lalande cell. The five would give a charging of about 4 amperes requiring about 80 hours to charge one storage cell. 2. What is the best battery to run a phonograph? A. The Edison-Lalande battery type S or the special storage battery supplied for it. 3. What book could you recommend on the subject of storage batteries and small motors? A. "Electric Light Installations and the Management of Accumulators," by Solomon, price $2; Bottone's "Electro Motors," 75 cents. 4. How many common Crowfoot 6×8 batteries would it require to recharge a 300 ampere storage 2·5 volts? A. A prohibitive number. At least three in series and almost any number in parallel; three hundred would not be too many altogether.

(5791) S. H. says: Will you kindly give me a formula for sticky fly paper? A. Cobalt fly paper. Womacka gives the following:

Quassia chips	150 parts.
Chloride of cobalt	10 "
Tartar emetic	2 "
Tincture of long pepper (1 to 4 of proof spirit)	80 "
Water	400 "

2. Powdered black pepper is mixed with sirup to a thick paste, which is spread by means of a broad brush upon coarse blotting paper. Common brown sirup will answer, but sirup made from sugar is preferable, as it dries quicker. For use a piece of this paper is laid upon a plate and dampened with water. The paper may also be made directly at the mill by adding sugar to the pulp and afterward ¼ to ⅛ of powdered black pepper and rapidly working it into a porous absorbent paper.

(5792) C. E. B. says: I have a 4½ bore and 9 inch stroke engine. My neighbor has two 3½ bore×4 stroke, working on quarter centers. He wants to trade with me. Will I get more power out of his two than my one? Please give me the exact horse power of both rigs with 60 pounds pressure steam, and the rule for calculating the horse power of any engine? A. Assuming that both engines cut off at ½ stroke and make 100 revolutions per minute, the 4½×9 inch engine will indicate $3\frac{3}{10}$ horse power and the two engines 3½×4 will indicate $1\frac{1}{10}$ horse power, and in proportion for other pressures and speeds. The rule is to multiply the area of the piston by the mean engine pressure due to cut-off, and this product by the travel of the piston in feet per minute. Divide the last product by 33,000 for the horse power.

(5793) G. E. asks: 1. What would be the expense to have an electric light (incandescent) connection running in my rooms, incandescent lamps (116 volts) being used about three buildings away? Could not wires be laid from there to my rooms, and what would be the expense to have this done? A. The expense depends on the number of lamps you require and on the drop in potential allowable. Consult the electrician of the concern supplying the light. 2. Is there any chemical fluid (not injurious) which when blown upon by bellows or mouth ignites the gas which is formed by the air blowing over the chemical and passing off? A. No. The "fire eaters" of the museums use gasoline for their performances. They dip a lump of cotton or lamp wick in it, place it in their mouths secretly, and, on blowing, enough gasoline vapor is carried with the breath to ignite. Great care is required in these experiments.

(5794) W. W. P. writes: I have an Edison-Lalande battery; please give the voltage, and current of same. A. The voltage varies. The mean working E. M. F. is given as 0·667 volt. The amperage for type B & X is 1 ampere; for type J, 2 amperes; for type Q, 3 amperes; for type R, 4 amperes; for type S, 6 amperes; for type W, 7 amperes. These are continuous currents; the maximum is from ⅛ to nearly 5 times as great. 2. Can I use the solution of the above battery for any purpose (experimental) after the battery has been exhausted? A. No. 3. Is there any book published that gives the instructions for the amount of iron and wire, etc., for a certain number of watts or output of dynamos and motors? A. See Sloane's "Arithmetic of Electricity," $1 by mail, for dynamo calculations.

(5795) C. S. writes: An engineer claims that if the steam pipe from the boiler to engine is higher at a point near the engine than it is at the boiler, any water that may be carried with the steam will drain back to the boiler. I claim it will not. Who is right? A. You are right. The velocity of the steam in the pipe will carry any water of condensation or priming directly to the cylinder. Even a vertical pipe will not always return water to the boiler.

TO INVENTORS.

An experience of forty-four years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

January 30, 1894,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Acid, process of and apparatus for making carbonic, Van Berkel & Fliess	513,691
Air attemperating apparatus, J. F. Dornfeld	513,487
Air compressor, hydraulic, J. H. Champ	513,556
Alarm. See Electric alarm.	
Aluminum sulfid, making, C. T. J. Vautin	513,660
Ammunition package, F. M. Garland	513,567
Anchor, vessel, R. Zertuche	513,355
Annunciator, M. Garl	513,775
Annunciator, J. H. McEvoy	513,592
Annunciator, F. W. Ross	513,956
Armor plates, apparatus for use in chilling, T. J. Tresidder	513,843
Badge, J. R. Lee	513,793
Bag. See Feed bag.	
Bag for transporting money, etc. Carlaw & Teedy	513,756
Bail, basket, O. Konigslow	513,512
Baling press, G. C. & C. A. Blakely	513,553
Ball. See Billiard ball.	
Ball, J. B. Dickey	513,560
Band cutter and feeder, G. Anderson	513,698
Band cutter and feeder, E. Hesse	513,682
Banjo, F. E. Cole	513,761
Barrel, knockdown, J. Z. Taylor	513,840
Barrel setting-up device, Pleukharp & Liggett	513,651
Battery. See Storage battery.	
Bearing, shaft, J. F. Newell	513,953
Bedstead, W. P. Hoskins	513,684
Bedstead frame, W. P. Hoskins	513,685
Beefsteak backer, J. W. Bernard	513,666
Bell, alarm, J. C. Wells	513,627
Bell, bicycle, E. C. Barton	513,606
Bell, etc., door, I. L. Garside	513,499
Bell, electric, J. H. McEvoy	513,593
Bicycle, C. H. Metz	513,589
Bicycle stand attachment, E. S. Bishop	513,870
Billiard ball, G. H. Burt	513,876
Blank feeding device, Gray & Murch	513,776
Boiler furnace, steam, W. Beesley	513,753
Boiler tube plate, steam, J. Phillips	513,620
Boiler water gauge, steam, I. M. Mabone	513,649
Boilers, water heating and feeding apparatus for steam, W. S. Richardson	513,955
Book cover, detachable, J. S. McDonald, Jr	513,814
Book stack for libraries, B. R. Green (r)	11,401
Boot or shoe upper packing machine, F. L. Conant	513,763
Bottle stopper, C. H. Davis	513,674
Bottle stopper, mucilage, J. S. Blinn	513,608
Bottle washer, J. P. Grunig	513,502
Bottle washer, Huether & Gross	513,640
Box. See Feed box. Paper box. Shipping box. Tool box.	
Box shaping machine, G. Patureau	513,528
Brake. See Car brake. Carriage brake. Differential brake. Train brake.	
Brake beam, C. B. King	513,942
Brake shoe, C. T. Schoen	513,656
Brake shoes, making, C. T. Schoen	513,655
Brick drying tunnel, J. Starkey	513,738
Brick kiln, W. H. Noye	513,719
Brooms, manufacture of, A. Stephen	513,837
Brush, bathing or flesh, F. Neidl	513,718
Bubble blowing device, G. Brousseau	513,479
Buckle, C. R. Harris	513,780
Burner. See Gas burner. Vapor buruer.	
Button fastener, R. M. Bell	513,866
Can. See Oil can.	
Car brake, H. E. Collett	513,670
Car brake, W. Curtiss	513,672
Car coupling, O. C. Billman	513,868
Car coupling, W. E. Burriss	513,875
Car coupling, J. Gates	513,677
Car coupling, J. W. Smart	513,657
Car coupling, D. Wholey	513,961
Car, railway, E. G. Allen	513,471
Car replacer, F. W. Reaney	513,531
Car starter and propeller, electric, Schmitz & Mendenhall	513,598
Car wheel, L. Roll	513,623
Car wheel, N. Washburn	513,546
Car wheel fender, G. Blakistone	513,702
Car wheel fender or guard, G. Blakistone	513,761
Card holder, McArdle & Furay	513,714
Carriage brake, G. W. Holmes	513,577
Case. See Shipping case.	
Cash carrier apparatus, H. M. Weaver	513,547
Cattle guard, L. Lefieve	513,946
Ceiling, fireproof, W. A. Burr	513,874
Ceiling, metallic, L. J. Cherest	513,879
Chains, buckles, straps, etc., means for disconnecting, L. Becker	513,607
Chair. See Surgical chair	
Chair fan attachment, rocking, C. F. Bettmann, Jr	513,477
Chimney, J. Cheout	513,758
Chimneys for shipment, packing, J. M. Leaver	513,644
Chloroform mixer, T. G. Lewis	513,797
Chuck, jewel, J. L. Hutchinson	513,931
Cigar cutter and advertising device, combined, E. G. Hanscom	513,779
Cigar tip cutter, F. H. La Pierre	513,581
Circuit closer, automatic, H. Lewers	513,796
Circuit controller, regulator, B. B. Ward	513,545
Clamp. See Hitching clam. Saw clamp.	
Clevis, A. M. Ward	513,854
Clip for papers, etc., G. P. Farmer	513,772
Cloth cutting machine, A. K. Thyll	513,741
Cloth, method of and machine for finishing, W. Hebdon	513,926
Clothes pin machine, C. W. Hall	513,572
Cock float, ball, W. H. Bate	513,474
Cock for air brakes and signals, safety, S. A. D. Heath	513,505
Collar and cuff holder for luggage carriers, G. S. Eggeman	513,770
Coloring apparatus, skin, A. F. Jones	513,642
Commutator, G. A. Rollins	513,533
Compo board, H. W. Mowry	513,710
Condenser, T. M. Eynon	513,904
Conductor, anti-inductive, H. F. Chick	513,482
Conveyer, R. L. Hassell	513,785
Conveyer, McMahan & Southard	513,952
Copying apparatus, autographic, White & Le Count	513,693
Corn cutter and shocker, D. O. Fosgate	513,495
Corn husker, H. H. Perkins	513,721 to 513,724
Corn shocking device, A. N. Russell	513,734
Corn shucker, E. A. Merritt	513,588
Cotton gin condenser, G. L. Rollins	513,732
Coupling. See Car coupling. Rope coupling. Shaft coupling.	
Cover for jars, etc., G. B. Ritter	513,731
Crane for manipulating tongs, Smith & Bryant	513,658
Culinary utensils, making, R. C. Cole	513,762
Cultivator, cotton, H. Nehrmeyer	513,817
Curling iron heater, G. E. Proctor	513,530
Cutter. See Band cutter. Cigar cutter. Cigar tip cutter. Corn cutter.	
Damper regulator, automatic, H. F. Maxim	513,948
Dead-light, A. McDougall	513,522
Differential brake, A. Falkenau	513,771
Digger. See Potato digger.	
Ditching machine, G. M. Pilcher	513,824
Door spring and check, J. Robinson	513,621
Drilling machine, J. Jopling	513,937
Drilling machine cutting bit, J. T. Snyder	513,541
Drinking fountain for poultry, G. W. Dodder	513,561
Drive wheel, electrically propelled, C. G. Anderson	513,859
Drying barley, malt, etc., apparatus for, J. White	513,694
Drying machine, J. B. Dobson	513,896
Dynamo brush, W. H. Fleming	513,611
Dumping apparatus, W. H. Barrett	513,862
Electric alarm, D. S. Schureman	513,829
Electric furnace, E. Thomson	513,602
Electric motors for operating machinery, utilizing, Hoffmann & Richter	513,507
Electric wire cleat or holder, A. W. Fuller	513,564
Electric wire connector, E. H. Munson	513,949
Electric wire holding device, detachable, C. Beard	513,630
Electrical distribution, system of, Stanley, Jr., & Kelly (r)	11,400
Electrical distribution, system of, C. H. Talmage	513,839
Electrolytic cell, C. T. J. Vautin	513,661
Electro-mechanical device for bells, etc., W. O. Meissner	513,587
Elevator safety device, W. P. Kidder (r)	11,402
Embroidering machine, Barnum & McDermott	513,861
Engine. See Gas engine. Steam engine.	
Engine, C. L. Lincoln	513,947
Engine controlling mechanism, B. F. Teal	513,601
Envelope fastener, P. E. Gonon	513,568
Envelope machine, Ermold & Hollis	513,491
Excelsior cutting machine, L. J. Wohnlich	513,853
Extractor. See Spout extractor.	
Eye guard, ventilated, H. M. Tileston	513,603
Fan, rocking chair, Methke & Schwalbe	513,809
Faucet and nozzle combined, M. L. & H. L. Bergman	513,475
Feed bag, E. D. Bean	513,865
Feed box, N. Cobb	513,557
Feeder, poultry, J. G. Whitten	513,747
Feeding and housing device, stock, O. W. Mapes	513,806
Fence machine, slat and wire, A. J. Haley	513,505
Fence making machine, J. Combs	513,886
Fence post moulding machine, W. Bayley	513,751
Fence wire tightener, I. M. Ulsh	513,844
Fender. See Car wheel fender. Plow fender. Safety fender.	
Filter, oil can, I. L. Davenport	513,893
Filter, water, T. T. Luscombe	513,802
Filter, water or fluid, S. B. Allison	513,551
Filtering apparatus, J. Feraud	513,905
Fire alarm telegraph system, M. J. O'Sullivan	513,526
Firearm, breech-loading, W. Mason	513,808
Fire escape, A. W. Carlson	513,757
Fire extinguishers, sprinkler head for automatic, V. Lapham	513,582
Fire extinguishers, valve for automatic, F. Gray	513,571
Fireplace heater, J. C. Treiber	513,842
Fish trap or net, W. E. Cole	513,483
Fountain. See Drinking fountain.	
Furnace. See Boiler furnace. Electric furnace. Metallurgical furnace. Ore roasting furnace.	
Furnace, H. W. Hemingway	513,680
Furnace, D. Jones	513,641
Furnace, A. Klounе	513,515
Gauge. See Boiler water gauge. Gas pressure gauge. Hoof gauge. Water gauge. Wire gauge.	
Garbage receptacle, B. F. Wise	513,628
Gas as fuel for calcining limestone, apparatus for utilizing producer, W. A. Koneman	513,945
Gas burner, S. M. Kemp	513,790
Gas, charging and combining wort, liquors, etc., with carbonic acid, Adam & Rehfuss	513,858
Gas engine, H. T. Dawson	513,486
Gas holder, A. Klonne	513,514
Gas making apparatus, J. E. Weaver	513,959
Gas pressure gauge, C. W. Hinman	513,786
Gate. See Swinging gate.	
Gate, W. F. Gatewood	51 ,914
Generator. See Steam generator.	
Glass polishing machine, M. A. Oppermann	513,618
Glass tube cutter, hand, R. W. Fenwick	513,965
Gloves, shoes, etc., fastener for, W. Q. Potts	513,727
Golf stick, G. A. Ruemmler	513,733
Grain bagger, G. Anderson	513,700
Grain binder, P. P. Coler	513,671
Grain meter, G. Anderson	513,699
Granular material from receptacles, apparatus for removing measured quantities of, P. Jochum	513,932
Grate bar, C. H. Gadey	513,565
Grinding spherical or other curved surfaces, machine for, R. Conrader	513,632
Grinding spherical or other surfaces, machine for, R. Conrader	513,631
Guard. See Cattle guard.	
Gun, bolt, J. P. Lee	513,647
Gun mounting, J. B. G. A. Canet	513,706
Gun or catapult, spring, W. B. Morris	513,590
Guns, automatic shell ejector for breakdown, M. A. Keller	513,511
Guns, ejector mechanism for breadkown, A. T. Brown	513,480
Hair structure, H. Kinzly	513,579
Hammer, mechanical, H. Lemp *et al*	513,516
Hammer, power, F. J. Fox	513,637
Handles, twister head for tool, N. Chase	513,481
Harness attachment, C. E. Barker	513,750
Harvester, corn, J. Dable	513,673
Hasp, J. L. Buckingham	513,668
Hasp sliding staple, J. L. Buckingham	513,667
Hat crowns and brims, machine for pouncing, G. E. Brush	513,873
Hay rack, E. White	513,549
Hay rake, J. G. Archer	513,552
Heat generating and distributing apparatus, J. L. Howell	513,508
Heater. See Curling iron heater. Fireplace heater.	
Heel, H. Rogers	513,622
Hitching clamp, L. Dunn	513,768
Hoofgauge, Z. L. Hayden	513,574
Hook. See Snap hook.	
Hoop skirt, J. L. & D. H. Coles	513,885
Hop trier, E. C. Horst	513,789
Horse check, automatic, W. C. H. Amende	513,629
Horse ice creeper, W. Jones	513,936
Horseshoe, elastic tread, J. H. Bowerman	513,871
Horseshoe, pneumatic tread, H. J. Welch	513,622
Hose, manufacture of, N. Lombard	513,799
Hosiery fulling machine, F. A. Tanzer	513,600
Hydraulic lift, H. Lubowski	513,800
Ice cream freezer, T. J. Harton	513,925
Inhaler, J. J. Hartnett	513,924
Inhaling apparatus, vapor, E. Madden	513,804
Injector, steam, J. Desmond	513,559
Insulated rail chair, L. McCarthy	513,960
Iron. See Sad iron.	
Iron, manufacturing oxide of, H. W. Hemingway	513,679
Ironing machine, A. R. Selden	513,687
Jack. See Lifting jack.	
Joint. See Railway rail joint. Toggle arm joint.	
Journal bearing, J. J. Wood	513,696
Kiln. See Brick kiln.	
Knitting machine, circular, H. E. Harbaugh	513,707
Labeling machine, F. Hasbrouck	513,784
Ladder attachment, E. F. Guste	513,920
Ladder, folding step, H. V. Crozier	513,485
Lamp, electric arc, Gutierrez & Thompson	513,921
Lamp, electric arc, F. A. Perret	513,725
Lamp socket, incandescent, McFarlane & Edgar	513,951
Lamp wick raiser, H. W. Hayden	513,638
Lathe cutter head, twist, W. Miller	513,810
Lathe, turret, F. H. Richards	513,653
Laths, machine for making metal, A. O. Wright	513,604
Laundry articles, receptacle for holding, A. Herdman	513,575
Lawn sprinkler, W. Rundquist	513,957
Leather stretching machine, P. King	513,943
Lifter. See Transom lifter.	
Lifting jack, Fleming & Ressler	513,774
Light. See Dead light.	
Liquids, etc., apparatus for combining, Adam & Rehfuss	513,857
Lock. See Permutation lock.	
Locomotive exhaust nozzle, E. W. Harris	513,923
Locomotive gearing, electric, G. W. Swartz	513,599
Locomotives, power transmitting mechanism for electric, M. W. Dewey	513,895
Loom let-off mechanism, J. C. Bill	513 867
Loom shuttles, operating electric, L. W. Lombard	513,615
Loom weft fork, W. Hinchliffe	513,928
Lubricator, T. R. Hill	513,506
Marking device, E. W. Dodge	513,897
Mat cutting machine, F. Wheeler	513,851
Match holder and cigar cutter, W. A. Alexander	513,472

© 1894 SCIENTIFIC AMERICAN, INC.

Measurer, automatic grain, G. Anderson..... 513,697
Metal working machine, T. R. Morgan, Jr..... 513,512
Metal working tool, W. H. Owen..... 513,954
Metallurgical furnace, James & Griffiths..... 513,614
Meter. See Grain meter.
Milking machines, vacuum controlling apparatus for, A. Shiels..... 513,625
Milking machines, vacuum regulating apparatus for, A. Shiels..... 513,624
Milling machine, F. Holz..... 513,683
Mine trap door, Herth & Bonenberger..... 513,576
Minnow pail, Thoma & Kies..... 513,740
Moistener, stamp or envelope, J. Durst..... 513,488
Mould, self feed and skim gate, C. A. Hanson 513,968
Motor. See Pendulum motor.
Motor, J. C. Lueneburg..... 513,801
Motor, C. W. Pearce..... 513,529
Mower, lawn, W. Bayley..... 513,752
Mowers, etc., knife or cutter for, D. B. Smith..... 513,834
Music leaf turner, C. S. Clizbe..... 513,963
Necktie, J. Lister..... 513,798
Night soil, etc., device for the disposal of, Busbee & Rosser..... 513,877
Nut lock, H. Cole..... 513,884
Nut lock, M. C. & W. J. Slusser..... 513,540
Oil can, E. R. Deverall..... 513,635
Oil purifier, waste, M. D. Hogan..... 513,787
Ore concentrator, C. E. Seymour..... 513,832
Ore concentrator, G. W. Waitt..... 513,849
Ore roasting furnace, W. P. Blake..... 513,754, 513,755
Ores, treating black band, E. A. Uehling..... 513,744
Oven, A. D. Ordway..... 513,821
Ozone, process of and apparatus for making, C. R. Poulsen..... 513,825
Packaging machine, J. S. Voitek..... 513,692
Paddlewheel, steamboat, P. B Speer..... 513,836
Pantograph for engraving and ornamenting watch cases, A. Zwahlen..... 513,962
Paper bag making machine, R. Mills..... 513,519
Paper box, D. S. Clark..... 513,760
Paper folding machines, packing box for, T. C. Dexter..... 513,766
Pea shelling machine, D. A. Gaither..... 513,911
Peanut roaster, E. Taunay..... 513,690
Pencil holder, A. N. Hanna..... 513,573
Pendulum motor, compensated, J. M. Cayce..... 513,878
Permutation lock, L. J. Cooper..... 513,764
Photographic printing frame, C. E. Lewis..... 513,517
Piano, L. & J. F. Matt..... 513,616
Pianoforte sounding board, A. Boden..... 513,478
Piano frame, upright, J. W. Reed..... 513,970
Pin. See Safety pin.
Pipe. See Stove or furnace pipes.
Pipe or rod wrench, King and Beardsley..... 513,580
Planing machine, G. Bird..... 513,869
Planter and fertilizer distributer, combined, J. R. Kelly..... 513,940
Planter, cane, E. Olivera y Martinez..... 513,807
Planter drill attachment, A. L. & D. L. Baughman..... 513,664
Plow fender, J. F. Greiner..... 513,918
Plowshare sharpening machine, S. S. Morrill..... 513,811
Pneumatic tool, C. B. King..... 513,941
Potato cutting machine, C. V. Jones..... 513,510
Potato digger, G. D. N. Edie..... 513,769
Powder. See Smokeless powder.
Power. See Wave and current power.
Press. See Baling press. Printing press. Stamping press.
Printing press, P. Brady..... 513,555
Printing press delivery apparatus, S. G. Goss..... 513,678
Printing presses, device for operating reciprocating beds of, E. A. Blake..... 513,554
Printing solid ground colors on wall paper and making same, roller for, J. Paravicini..... 513,822
Protractor, J. B. Riddle..... 513,828
Pulp digesters, blow-off pipe for, Curtis & Jones.. 513,892
Pump, H. Field..... 513,966
Pump, air, E. Savill..... 513,535
Pump, rotary, S. N. Eisler..... 513,901
Punching machine, P. L. Johnson..... 513,933
Purifier and dust collector, N. W. Holt..... 513,788
Push button for floors, bell, N. J. Busby..... 513,705
Pyroxylin labels, making, R. R. Lansing..... 513,791
Rack. See Hay rack.
Rails to metal sleepers, appliance for securing flanged, E. H. Stone..... 513,838
Railway brush, street, P. A. & A. R. Coonradt.. 513,888
Railway rail chair and cross tie combined, A. J. Moxham..... 513,712
Railway rail joint, A. J. Moxham..... 513,711
Railway rail joint, J. N. Wilson..... 513,695
Railway rails, electric connection for, A. Green.. 513,777
Railway, sectional electric, G. W. Demmick..... 513,894
Railway signal, J. R. Jones..... 513,964
Railway switch, J. R. Jones..... 513,935
Railway switch, A. Kneip..... 513,944
Railway switch, automatic, D. B. Hart..... 513,781
Railway switch, automatic, McDonough & Williams..... 513,716
Railway switches by screw action, apparatus for working, C. Moderegger..... 513,520
Railway tie, J. C. Lee..... 513,792
Raisin seeder, S. B. Bliss..... 513,704
Rake. See Hay rake.
Recording device, autographic, Copeland & Stoelting..... 513,558
Refrigerator, T. B. Ashford..... 513,860
Registering device, electrical, F. Von Hefner-Alteneck..... 513,612
Regulator. See Damper regulator.
Rheostat, automatic, C. J. Sturgeon..... 513,626
Rivet setting machine, H. H. Cummings..... 513,634
Road crusts, machine for breaking up, A. J. Henderson..... 513,708
Roaster. See Peanut roaster.
Roof or floor, fireproof, T. A. Lee..... 513,795
Rope coupling, Wenk-Wolff & Strohbach..... 513,746
Sad iron, B. Rein..... 513,728
Sad iron, M. Tverdal..... 513,743
Safety fender or trap, G. Blakistone..... 513,703
Safety pin, M. Frisen..... 513,563
Sanding and finishing machinery, Clark & Shebesta..... 513,880
Sash balance, J. E. Parrish..... 513,828
Sash fastener, W. E. Cline..... 513,882
Sash fastener, F. W. Mann..... 513,805
Saw clamp, F. W. Seaver..... 513,831
Scraper employed on tubes of fuel economizers, triple, E. Green..... 513,917
Screen, G. W. Cross..... 513,890
Screw, temper, A. T. Herrick..... 513,927
Seal, car, Flower & Denney..... 513,908
Seat. See Vehicle seat.
Seat, T. O. Colles..... 513,484
Seat and back rest, C. L. Russell..... 513,735
Semaphore operating device, J. H. Frischen, 513,496, 513,562
Separating granular mixtures, method of and means for, M. McDonald..... 513,521
Separating machine, N. W. Holt..... 513,613
Sewing machine, H. F. Nason..... 513,717
Sewing machine buttonhole attachment, F. C. Hall..... 513,504
Sewing machine, straw braid, I. H. Gonyon..... 513,500
Shade fixture, window, A. B. Dunkle..... 513,610
Shade roller, S. Hartshorn..... 513,783
Shaft coupling, S. Crolley..... 513,609
Shears, G. H. Stockmann..... 513,542
Shingle bunch and binder, W. J. Munro *et al*..... 513,813
Shipping box, R. Niven..... 513,819
Shipping case, Leaver & Vance..... 513,645, 513,646
Ship's hatch, A. McDougall..... 513,523
Shot holding and measuring cabinet, H. T. Luster..... 513,803
Sifter, flour, C. P. Eichler..... 513,489
Signal. See Railway signal.
Slicer, vegetable, Sibbett & Longabach..... 513,833
Smokeless powder, E. A. Starke..... 513,737
Snap hook, Reed & Carothers..... 513,652
Solder for use with aluminum and its alloys, R. I. Romar..... 513,654
Soldering apparatus, F. H. Lippincott..... 513,518
Space bar for line casting machines, C. Skatulla.... 513,958
Spindle retaining device, G. A. Draper..... 513,898
Spout extractor, sap, M. R. Moss..... 513,591
Spring. See Door spring.
Spring winding mechanism, F. A. Richter..... 513,532
Sprinkler. See Lawn sprinkler.
Square for picture frame mats, L. H. Barberie.... 513,665
Stamp affixing device, postage, G. E. Conrad..... 513,887
Stamping press, T. A. Dicks..... 513,636
Steam engine, J. Evered..... 513,493
Steam engine, F. G. Hobart..... 513,929
Steam engine, S. Scognamillo..... 513,830
Steam engine, multiple-cylinder, A. W. Ofeldt.... 513,650
Steam generator, D. Halpin..... 513,922
Steam trap, F. A. Littlefield..... 513,648
Sterilizing or cooking apparatus, L. Edelman..... 513,899
Stone dressing tool, O. P. Howard..... 513,509
Stone working machine, S. Hernon..... 513,969
Stopper. See Bottle stopper.
Storage battery, G. B. Fraley..... 513,910
Stove and burner, oil, E. G. Mummery..... 513,713
Stove attachment, cook, A. C. Goeddel..... 513,967
Stove or furnace pipe, R. H. Martin..... 513,586
Stoves, vaporizer for gasoline, C. H. Childs..... 513,669
Straw stacker, F. P. Richards..... 513,597
Surgical chair, H. G. Leisenring..... 513,584
Suspenders, J. A. Miller..... 513,709
Swing support, E. D. Shaver..... 513,539
Swinging gate, B. O. McCoy..... 513,715
Switch. See Railway switch. Telephone switch.
Switch and signal operating device, J. H. Frischen..... 513,497
Switch bar, F. A. Weller..... 513,745
Switch operating device, H. P. Cogswell..... 513,883
Switch setting and locking device, W. Wendelin.. 513,548
Table. See Tobacco booking table.
Tack centering guide for tack driving machines, D. B. Nye..... 513,820
Targets, mould for making composition, H. F. Parker..... 513,527
Telephone, H. S. Page..... 513,720
Telephone circuits, signaling system for, Sabin & Hampton..... 513,534
Telephone switch, automatic, A. C. Wheat..... 513,960
Telephonic transmitter, F. H. Richards..... 513,729
Telephone transmitter, F. H. Richards..... 513,730
Telephone trunk lines, signaling system for, C. E. Scribner..... 513,537
Tension rod, T. A. Lee..... 513,794
Tent, G. Tolmie..... 513,841
Theatrical appliance, electrical, H. E. Waite..... 513,850
Thrashing machine, D. B. Tanger..... 513,689
Ticket and time-table holder, F. D. Atherton..... 513,749
Ticket, railway, F. M. Shattuc..... 513,538
Tire, elastic, J. V. Kemendy..... 513,643
Tire, pneumatic, W. R. Barrett..... 513,863
Tire, pneumatic, L. Holt..... 513,639
Tire, pneumatic, J. G. Moomy..... 513,617
Tires, puncture-proof band for pneumatic, S. Lee 513,583
Tobacco booking table, H. Zwicker..... 513,605
Tobacco, manufacture of plug, W. W. Wood..... 513,550
Toboggan, roller, C. N. Grant..... 513,570
Toggle arm joint, W. W. Wallace..... 513,544
Tongs and shovel, combined, J. N. Crouch..... 513,891
Tongue support, wagon, S. O. Eells..... 513,900
Tool box, W. Q. Potts..... 513,726
Tool, combination, C. C. Trout..... 513,742
Tooth, artificial, Neiman & Beecher..... 513,818
Toy microscope, F. W. Gardam..... 513,912
Toy or doll house, E. M. Smith..... 513,688
Toy velocipede, J. McFarlane..... 513,815
Train brake, automatic, F. B. Brock..... 513,872
Train operated devic , Frischen & Pfeil..... 513,498
Transom lifter, G. M. Garland..... 513,913
Trap. See Fish trap. Steam trap.
Trap, Goff & Judkins..... 513,915
Treadle, D. Peglaw..... 513,595
Trolley pole stand, G. Valley..... 513,846, 513,847
Trolley wire finder, E. Gale..... 513,566
Trough. See Watering trough.
Truck, G. F. Armstrong..... 513,748
Truck, car, J. W. Cooper..... 513,889
Truck, car, J. B. Smithman..... 513,835
Truss, A. Hessels..... 513,681
Truss, D. W. Lewis..... 513,585
Tug, hame, L. G. Gustavel..... 513,919
Turret machine for boring cylinders, F. H. Richards..... 513,827
Twister roll, Rhoades & Draper..... 513,826
Typewriting machine, L. B. Berrien..... 513,476
Typewriting machines, impression hammer for, W. H. Travis..... 513,343
Underwaist, S. T. Converse..... 513,633
Upper-folding machine, C. E. Williams..... 513,852
Vacuum breaker, T. M. Eynon..... 513,903
Valve, balanced slide, A. F. Kelly..... 513,938
Valves for fluid pressure brakes, device for operating, J. H. Fox..... 513,676
Vapor burner, S. E. Folk..... 513,909
Vaporizer, H. Wilkinson..... 513,663
Vehicle oscillating device, E. M. Crane..... 513,765
Vehicle, power driven, W. P. Farrell..... 513,773
Vehicle seat, C. M. Kellogg..... 513,939
Vehicle top, E. D. Stevenson..... 513,739
Vehicle top, folding, S. E. Kierolf..... 513,578
Velocipede, W. L. Decker..... 513,675
Velocipede gear case or cover, H. Bate..... 513,864
Vending machine, E. D. Valentine..... 513,845
Vessel, A. McDougall..... 513,524
Vessel, R. Zertuche..... 513,856
Voting booth, C. B. & H. H. Grahl..... 513,569
Wagon, dumping, B. W. Clark..... 513,881
Washer. See Bottle washer.
Watchcase pendant, E. C. Fitch..... 513,907
Water gauge, T. Elcoate..... 513,902
Water gauge, safety, G. B. Essex..... 513,492
Watering trough, J. E. Kordick..... 513,513
Water purifying apparatus, P. Bail..... 513,473
Water purifying apparatus, R. T. Scowden, 513,536, 513,686
Wave and current power, Husted & Doolittle..... 513,950
Weigher, grain, H. A. Stock..... 513,659
Wheel. See Car wheel. Drive wheel. Paddle wheel.
Wheel, T. Hartley..... 513,782
Wheel, A. Nelson..... 513,525
Wheel, spring spoke, G. Valley..... 513,848
Whip socket, H. A. Smith..... 513,736
Wick fastener, Goodrich & Merritt..... 513,501
Wire gauge, J. Poole..... 513,596
Wire stretcher, J. H. Gregory..... 513,778
Wire stretcher, W. P. Negus..... 513,816
Wire tightener, W. B. Fielding..... 513,906
Woodworking machine, M. W. & C. C. Cory..... 513,964
Wrench. See Pipe or rod wrench.
Wrench, E. H. Goslin..... 513,916
Wrench, W. A. Papoun..... 513,594
Wrench, J. T. Pedersen..... 513,619
Zinc-lead-sulfid ores, treating, S. H. Emmens..... 513,490

DESIGNS.

Back bar, W. H. Peeps..... 23,028
Badge, J. H. Leyson..... 23,021
Cigar cutter case, J. L. Sweet..... 23,023
Clock case, W. C. Brown..... 23,026
Game board, C. B. MacNeal..... 23,025
Mirror frame, P. Wiederer..... 23,024
Photograph mount, W. A. Kelsey..... 23,022
Rug or carpet, A. M. Rose..... 23,031
Spoon, souvenir, A. Kaiser..... 23,019
Spoons, etc., handle for, A. F. Jackson..... 23,020
Target, flying, H. F. Parker..... 23,027
Ventilator, S. J. Brown..... 23,030
Ventilator, J. Mulligan..... 23,029

TRADE MARKS.

Ale, aerated and non-alcoholic, Barclay & Company..... 24,135
Baking powder, Nicholas Burke Company..... 24,128
Beverages, carbonated, L. Kalling..... 24,136
Bread, Vienna Bakery Company..... 24,132
Candies and gum, antiseptic chewing, Antiseptic Company..... 24,142
Canned meats, fruits, and vegetables, D. W. Archer..... 24,126
Canned salmon, H. Eggers & Company..... 24,127
Compounds for cleaning wood and leather, G. Fuller..... 24,153
Cotton fabrics, Bernheimer & Walter..... 24,124
Cotton, knitting, Dexter Yarn Company..... 24,121
Fertilizer, Charleston, S. C., Mining and Manufacturing Company..... 24,154
Fertilizer, Mayer & Watts..... 24,155
Flour wheat, Buffalo Milling Company..... 24,130
Flour, wheat, Empire Mill Company..... 24,129
Hooks and eyes, American Supply Company..... 24,118
Hose, belting, and packing, Bowers Rubber Company..... 24,122, 24,123
Laces and braid, shoe, H. Fawcett..... 24,120
Medicinal plasters, W. H. Gannett..... 24,148
Medicine to purify the blood, W. A. Lovering..... 24,145
Mineral water, artificial, White Rock Mineral Spring Compa y..... 24,134
Pipe threading a d cutting machines, Curtis & Curtis..... 24,125
Remedy for certain affections of the skin, Daggett & Ramsdell..... 24,144
Remedy for certain named diseases, internal, Germozone Company..... 24,146
Remedy for diseases of the respiratory organs, A. MacKinnon..... 24,143
Remedy for neutralizing the effects of intoxicants, G. H. Bonte..... 24,140
Salve, R. E. Mauntel..... 24,147
Soap for the laundry, bath, and toilet, white, Torrey & Bentley Company..... 24,152
Soap, laundry, bath, and toilet, Torrey & Bentley Company..... 24,151
Soap, toilet and laundry, E. E. Fox..... 24,150
Suspenders and braces, men's, Wire Buckle Suspender Company..... 24,119
Tobacco, smoking and chewing, Gilmour Brothers Company..... 24,141
Tooth paste or dentifrice, W. J. Hurd..... 24,149
Watches, Cross & Beguelin..... 24,117
Wheat, cooked granul ted, Our Home Granula Company..... 24,131
Whisky, C. H. Ross & Company..... 24,137, 24,138
Whisky, wines, liquors, brandies, and champagnes, Clover Leaf Wine Company..... 24,139

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion - - 75 cents a line
Back Page, each insertion - - - - $1.00 a line

☞ *For some classes of Advertisements, Special and Higher rates are required.*

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

Patent Foot Power Machinery
Complete Outfits.
Wood or Metal workers without steam power can successfully compete with the large shops, by using our New **LABOR SAVING Machinery**, latest and most improved for practical Shop Use, also for Industrial Schools, Home Training, etc. Catalogue free.
Seneca Falls Mfg. Co.
695 Water Street, Seneca Falls N. Y.

Graduated Beam Calipers.
For all Trade and Scientific purposes. Vernier and Metric System. All tools warranted accurate. ☞ *Send for circular and price.*
Address E. G. SMITH, COLUMBIA, PA.

WILSON IMPROVED IRON PLANERS.
STANDARD SIZES & KEPT IN STOCK. W. A. WILSON RIVER ST ROCHESTER, N.Y.

LATHES, Shapers, Planers, Drills, Machine Shop Outfits, Foot Lathes, Tools and Supplies. Catalogue Free. SEBASTIAN LATHE CO., 120 CULVERT ST., CINCINNATI, O.

SCIENTIFIC EXPERIMENTS.—DESCRIPTION of some simple and easily performed scientific experiments. Foucault's pendulum, exchange of water and wine, the bird in the cage, the five-pointed star, the sum of the angles of a triangle, surface of the sphere, with 6 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **875**. Price 10 cents. To be had at this office and from all newsdealers.

Every Man His Own Printer.

$3 PRESS,
for printing Cards and Labels.
Circular Press, $8.
Small Newspaper Press, $44.
Printed instructions for using. Catalogue free.
KELSEY & CO., Makers, Meriden, Conn.

STEVENS PATENT SPRING SCREW THREAD CALIPERS
Ideal, No. 64.
Price, by mail, postpaid.
3 inch.....$1.00 | 5 inch.....$1.25

Ideal and Leader Spring Dividers, and Calipers, Ideal Surface Gauges, Depth Gauges, and Fine Machinists' Tools.
☞ *Illustrated catalogue free to all.*
J. STEVENS ARMS & TOOL CO., P. O. Box 280, Chicop e Falls, Mass.

CONSULTATION AND ADVICE TO INVENTORS.
Experimental work of every description. Automatic machinery designed a d built. ☞ Send for circular.
MALTBY MFG. CO., Brooklyn, N. Y.

ICE-BOATS—THEIR CONSTRUCTION and Management. With working drawings, details, and directions in full. Four engravings, showing mode of construction. Views of the two fastest ice-sailing boats used on the Hudson river in winter. By H. A. Horsfall, M.E. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **1**. The same number also contains the rules and regulations for the formation of ice-boat clubs, the sailing and management of ice-boats. Price 10 cents.

WORLD'S FAIR HIGHEST AWARDS



Every Machine Warranted.

Medal & Diploma on our INCUBATOR and BROODER combined.
Medal on Hot Water Brooder.
Old "Reliable" Leads Them All.
If you are interested in Poultry, it will pay you to send **4c.** in stamps for our 72-p. cat., giving valuable points on poultry culture.
Reliable Incubator & Brooder Co., Quincy, Ill.

Useful Books!

Manufacturers, Agriculturists, Chemists, Engineers Mechanics Builders, men of leisure and professional men, of all classes, need good books in the line of their respective callings. Our post office department permits the transmission of books through the mails at very small cost. A comprehensive catalogue of useful books by different authors, on more than fifty different subjects, has recently been published for free circulation at the office of this paper. Subjects classified with names of authors. Persons desiring a copy have only to ask for it, and it will be mailed to them. Address,
MUNN & CO., 361 Broadway, New York.



IMPROVED CHARTER GAS ENGINES.
2 TO 50 ACTUAL H.P.
USING GASOLINE, COAL GAS, NATURAL OR PRODUCER GAS.
SAFE RELIABLE ECONOMICAL SIMPLE NO DELICATE PARTS.
SEND FOR CATALOGUE. H.W. CALDWELL & SON. SOLE M'F'R'S.
WASHINGTON & UNION ST'S. CHICAGO. ILL'S.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **549**. Price 10 cents. To be had at this office and from all newsdealers.

Fami'y Ice Machine Ice, etc., in a few minutes, $10 and up. Filters, $1.25 and up. Cookers, $1. Seltzateurs to prepare one's self soda water, $4.50 and up. L. DERMIGNY, 126 W. 26th St., N. Y.

NEPERA PAPER.
A New Printing-Out Ready Sensitized Paper.
PERMANENT PRINTS, Better Results, Easier Obtained. **No Ice, No Hot Water Treatment, No Lead Salts, No Alum** or other hardeners endangering the durability of the image. Extreme simplicity of all operations. Printed, toned, and mounted in less time and with less trouble tha any other paper. Does not bronze and does not fix out. *Can be treated alike in summer as in winter.* Has **none** of the defects of its rivals. ☞ Write for free sample sheets to
For Sale by All Dealers. **Nepera Chemical Co., Nepera Park, N. Y.**

D'AMOUR & LITTLEDALE,
MACHINISTS AND TOOL MAKERS,
204-206 East 43d St., New York.
Drawings, Patterns, Models, and Experimental Work.



VANDUZEN STEAM JET PUMP
THE BEST IN THE WORLD.
Pumps Any Kind of Liquid.
Always in Order, never Clogs nor freezes. Every Pump Guaranteed.
10 SIZES.
200 to 12000 Gallons per Hour.
Cost $7 to $75 each. Address
THE VANDUZEN & TIFT CO.,
102 to 108 E. Second St., Cincinnati, O.

IF YOU HAVE ANY SMALL ARTICLES in Brass or Iron that you want manufactured in quantities, write to THE JONES BROS. ELECTRIC CO., 28-30-32 West Court St., Cin'ti, O.

MUSIC AND LONGEVITY.—A PAPER by Ephraim Cutter, M.D., in which the author endeavors to show that music prolongs or is thought to prolong life; that diseases peculiar to and preventive of longevity are those that impede the circulation of air, blood and nerve force. That music is physiologically capable of enlarging the chest and the capillaries and of calming and regulating, if not increasing nerve force, and that, other things being equal, longevity should belong to musical people. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **924**. Price 10 cents. To be had at this office and from all newsdealers.

WITH YOUR WORKSHOP EQUIPPED
With outfits of Barnes Wood and Metal Working
☞ **FOOT POWER** ☜
Machinery you can successfully compete with Factories that use steam power, both in quality and profit on product. The only complete line of such machines made. Have stood the test twenty years. Send for catalogue. Address:
W. F. & JOHN BARNES CO.,
1999 Ruby St., Rockford, Ills.



WORLD'S ELECTRICAL CONGRESS at Chicago.—Addresses of Prof. Elisha Gray. Prof. Thomson. Dr. Von Helmholtz, and Mr. W. H. Preece. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **925**. Price 10 cents. To be had at this office and from all newsdealers.

WORTHLEY STALL WORKS, 53 Elm St., Boston, Mass., have sold 8000 of his Patent 25-lb. Slow Feed Oat Mangers. Price, **$1.60.** VAN NESS CO., 50 Warren St., N. Y. W. Y. WARNER, 140 N. Broad Street, Phila.

Model & Experimental Work. Absolute secrecy. Advice and ideas not charged for. Send for particulars **GARDAM & SON,** 98 John Street, NEW YORK.

Barr-Stone Grinding Mills

We offer you the best mill on the market at such a low figure it will pay you to write to us. They are the best constructed, least complicated, and fastest grinding mills yet produced. Satisfaction guaranteed. *Our 48-page illustrated catalogue sent FREE.*
LEON'D D. HARRISON,
135 Hallock Ave., New Haven, Conn

NOW READY!
Fourteenth Edition of
Experimental Science
A GREAT BOOK FOR THE HOLIDAYS.

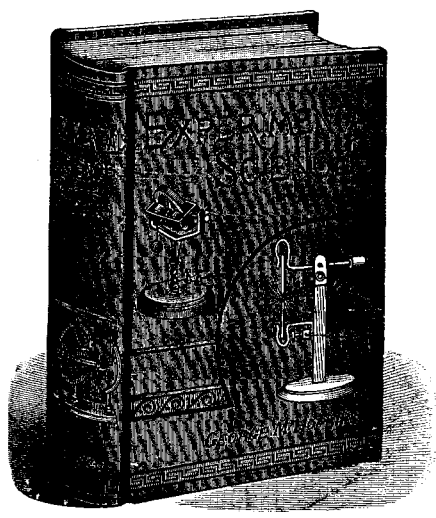

REVISED AND ENLARGED.
120 Pages and 110 Superb Cuts added.

Just the thing for a holiday present for **any man,** woman, student, teacher, or any one interested in science.
In the new matter contained in the last edition will be found the Scientific Use of the Phonograph, the curious optical illusion known as the Anorthoscope, together with other new and interesting Optical Illusions, the Optical Projection of Opaque Objects, new experiments in Projection, Iridescent Glass, some points in Photography, including Hand Cameras, Cane Cameras, etc.; Systems of Electrical Distribution, Electrical Ore Finder, Electrical Rocker, Electric Chimes, How to Color Lantern Slides, Study of the Stars, and a great deal of other new matter which will prove of interest to scientific readers.
840 pages, 782 fine cuts, substantially and beautifully bound. Price in cloth, by mail, **$4.** Half morocco, **$5.**
☞ *Send for illustrated circular.*
MUNN & CO., Publishers,
Office of the SCIENTIFIC AMERICAN,
361 BROADWAY, NEW YORK.

© 1894 SCIENTIFIC AMERICAN, INC.

Founded by Mathew Carey, 1785.

HENRY CAREY BAIRD & CO.
Industrial Publishers, Booksellers, and Importers,
810 Walnut St., Philadelphia, Pa., U. S. A.

☞Our new and Revised Catalogue of Practical and Scientific Books, 88 pages, 8vo, and our other Catalogues and Circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.

GATES ROCK & ORE BREAKER

Capacity up to 200 tons per hour.

Has produced more ballast, road metal, and broken more ore than all other Breaks combined. Builders of High Grade Mining Machinery. Send for Catalogues.

GATES IRON WORKS,
50 C So. Clinton St., Chicago
136 C, Liberty Street, New York.
237 C, Franklin St., Boston, Mass

CALIFORNIA EXCURSIONS.

The well known Phillips Excursion Company have arranged to run weekly excursions to all principal California and other Pacific Coast cities from all points on the Baltimore & Ohio R. R.

The parties will leave the East on Wednesday of each week, commencing January 17th, and passengers will be booked through to destination. There are no Pacific Coast tours offering as good accommodations at less expense. For full information address A. Phillips & Co., No. 111 S. 9th Street, Philadelphia, or call on nearest ticket agent B. & O. R. R. Co.

DEAFNESS

and HEAD NOISES relieved by using **Wilson's Common Sense Ear Drums**
New scientific invention, entirely different in construction from all other devices. Assist the deaf when all other devices fail, and where medical skill has given no relief. They are safe, comfortable, and invisible; have no wire or string attachment. Write for pamphlet. ☞ *Mention this paper.*

Drum in position.

WILSON EAR DRUM MFG. CO., LOUISVILLE, KY.

THE GADEY AIR GRATE.

Territory for Sale or Lease. See SCIENTIFIC AMERICAN, January 6, 1894. BROWN BROS. MFG. CO., Jackson and Clinton Streets, CHICAGO, ILL.

KNITTING MACHINERY.

Knitted underwear is in vogue. The best machinery for its manufacture, such as

SHIRT MACHINES, SLEEVERS, BAR STITCH MACHINES, etc.,

are made by **SCOTT & WILLIAMS,**
2077 E. Cumberland Street,
Established 1865. Philadelphia, Pa., U. S. A.

LIFE SAVING DEVICES.— A COLlection of suggestions of devices for communicating between the shore and stranded vessels, offered to the London *Daily Graphic* by various correspondents. With 100 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **848, 849, 850, 851, 852, 854, 861, 862, 864, 869, 871, 874** and **884.** Price 10 cents each, or $1.30 for the series. To be had at this office and from all newsdealers.

ARMSTRONG'S ✻ PIPE ✻ THREADING
—AND—
CUTTING-OFF MACHINES



Both Hand and Power.
Sizes 1 to 6 inches.
Water, Gas, and Steam Fitters' Tools, Hinged Pipe Vises, Pipe Cutters. *Stocks and Dies universally acknowledged to be* THE BEST. ☞ *Send for catalog.*
Armstrong Mfg. Co., Bridgeport, Conn.

BUY TELEPHONES

That are good—not "cheap things." The difference in cost is little. We guarantee our apparatus and guarantee our customers against loss by patent suits. Our guarantee and instruments are **BOTH GOOD.**

WESTERN TELEPHONE CONSTRUCTION CO.,
440 Monadnock Block, CHICAGO.
Largest Manufacturers of Telephones in the United States.



Pipe Frame Truck Baskets
Wire Standard Truck Baskets
STEEL and WOODEN TRUCKS
PIPE FRAME SHOE RACKS
WIRE LOOP SHOE RACKS
L. MURRAY MOORE,
Rochester, N. Y.

HOME ELECTRIC MEDICAL BATTERY
Used and recommended by all physicians as infallible for Rheumatism, Neuralgia, and all nervous troubles. Send for **Free Circular.** **AGENTS WANTED** everywhere. **$10 A DAY** easily made. **T. C. RAFFERTY & CO., Chicago, Ill.**

JUST PUBLISHED.



Star ★ Maps

By Richard A. Proctor, F.R.A.S.

* * *

series of twelve elegantly printed Maps of the Heavens, one for every month in the year. Specially prepared for use in North America. With descriptions accompanying each map, giving the names of the principal stars and constellations, showing their relative positions at given hours and days of the month.

A most beautiful and convenient work, specially adapted for the use of those who desire to acquire general knowledge of the starry realms.

Which is added a description of the method of using and using artificial luminous stars as an aid in the mind the names and places of the and constellations, by Alfred E. Beach.

this is one of the most popular, useful, orks of the kind ever published.

me, elegantly bound in cloth. Price

CO., Publishers,
361 Broadway, New York.

---

12 VARIETIES SEEDS FREE

WITH A YEAR'S SUBSCRIPTION TO THE

AGRICULTURAL EPITOMIST.

EIGHT Varieties Farm and Garden Seeds Composed of the Following Varieties:

1 Packet Dungan's White Prolific Corn.
1 " White Superior Oats.
1 " Early Blood Turnip Beet.
1 " Kolb's Gem Water Melon.
1 Packet Golden Upright Pepper.
1 " California All Heart Lettuce.
1 " Beckert's Chartier Radish.
1 Whole Potato, "Huntington's Hoosier."

And FOUR Varieties Flower Seeds.

1 Packet Pinks. 1 Packet Asters. 1 Packet Pansies. 1 Packet Mignonette.

12 varieties in all of Rare, Selected, and Tested Seeds and a year's subscription to the Agricultural Epitomist, all

For 50 Cents. For 50 Cents.

Don't fail to get these 12 varieties of Rare Seeds and the best Farm, Garden, and Household Paper published for the **Practical, Prosperous,** and **Progressive Farmer** and **Gardener.** Address

EPITOMIST PUBLISHING CO., 3 Burford Bldg., Indianapolis, Ind.

THE SIMPLEX TYPEWRITER

GUARANTEED to do as good work as any high priced machine. Specially adapted for use in private correspondence. Sent by mail or express prepaid on receipt of $2.75. In handsome walnut case, 50c. extra

Address Simplex Typewriter Co., 32 Great Jones Street, New York.

SCIENTIFIC AMERICAN DYNAMO.

Description of a plain shunt-wound dynamo of simple construction, capable of supplying a current of from 60 to 75 110-volt incandescent lamps, or of being used as a 5 h. p motor. This machine was constructed especially for the benefit of the readers of the *Scientific American*, by Mr. W. S. Bishop, of New Haven, Conn. It is designed to meet the wants of mechanics and amateurs who desire to construct a simple dynamo for their own use, but who do not care to enter into the subject scientifically. With 24 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **865.** Price 10 cents. To be had at this office and from all newsdealers.

TELEPHONES,

Receivers, Compound & Bar Magnets, Magneto Bells, Wire & Insulators.

Castings and parts of all Scientific American Dynamos and Motors. Engine Castings. Electrical Supplies. ☞ *Send stamp for catalogue.*

PALMER BROS., Mianus, Conn.

ELECTRO MOTOR. SIMPLE. HOW TO

make. By G. M. Hopkins.—Description of a small electro motor devised and constructed with a view to assisting amateurs to make a motor which might be driven with advantage by a current derived from a battery, and which would have sufficient power to operate a foot lathe or any machine requiring not over one man power. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **641.** Price 10 cents. To be had at this office and from all newsdealers.

6.95 = FREE ELGIN Waltham or Springfield.

HUNTING CASE OR LADIES SIZE

This elegant 14-k GOLD plated watch with ELGIN, Waltham or Springfield works. Cut this out and send it to us with your name and address and we will send the elegant gold-finished watch to you by express for examination, and if you think it equal in appearance to any $35 solid gold watch, pay our sample price, $6.95 and express charges and it is yours. We send with it our guarantee that you can return it any time within one year if not satisfactory, and if you sell or cause the sale of six, we will give you ONE FREE. Write at once as this offer may never appear again.

CHICAGO WATCH CO.
281 Wabash Ave., Chicago, Ill.

EXPERT MODEL MAKING. Established 1867.
J. C. SEYL, Prop. Chicago Model Works, Chicago, Ill. 179 E. Madison St. Write for Catalogue of Model Supplies.

ALWAYS FRESH AND CLEAN!

The Torsion Braided Wire Spring Pillow is cool and cleanly. Is conducive to refreshing sleep. Health restoring to the sick. Practically indestructible. Price, upholstered in fine hair:

(Pillow with one end open to show construction.) Adults, 20x28, $3.50. Child's, 4x22, $2.50. Sent, express prepaid, on receipt of price. Address **Weston & Wells Mfg. Co.,** 1112-1116 Noble St., **Phila., Pa.**

HARRISON CONVEYOR!

For Handling **Grain, Coal, Sand, Clay, Tan Bark, Cinders, Ores, Seeds, &c.**

Send for Circulars. | **BORDEN, SELLECK & CO.,** { Sole Manu'f'rs. } **Chicago, Ill.**



MAKE YOURSELF A MECHANICAL ENGINEER OR DRAUGHTSMAN;

Or qualify to take charge of or to superintend the manufacture of machinery, by devoting your idle hours to **Home Study** by the method of **THE CORRESPONDENCE SCHOOL OF MECHANICS, Scranton, Pa.** To begin, students need only know how to read and write. Moderate charges. Send for FREE Circular.

PATENTS
CAVEATS, TRADE MARKS
COPYRIGHTS.

CAN I OBTAIN A PATENT? For a prompt answer and an honest opinion, write to **MUNN & CO.,** who have had nearly fifty years' experience in the patent business. Communications strictly confidential. A **Handbook** of Information concerning **Patents** and how to obtain them sent free. Also a catalogue of mechanical and scientific books sent free.

Patents taken through Munn & Co. receive special notice in the **Scientific American,** and thus are brought widely before the public without cost to the inventor. This splendid paper, issued weekly, elegantly illustrated, has by far the largest circulation of any scientific work in the world. **$3** a year. Specimen copies sent free.

Building Edition, monthly, $2.50 a year. Single copies, **25** cents. Every number contains beautiful plates, in colors, and photographs of new houses, with plans, enabling builders to show the latest designs and secure contracts. Address

MUNN & CO., NEW YORK, **361** BROADWAY.

AGENTS WANTED, and territorial rights for sale. The Domestic Hydrocarbon Burner converts carbon oil into gas. Has perfect combustion. Address the patentee and mfr., T. A. Williamson, 234 Juniata St., Allegh'y, Pa.

STUDY ELECTRICITY AT HOME

By our correspondence method; 5 thorough courses; Experiments; reasonable Terms. Circulars Free. *The Scientific Machinist Co. Cleveland, O.*

HOW TO MAKE

a 1 horse power Motor or Dynamo. Illustrated with full working drawings by A. E. Watson. Price 25c. postpaid. BUBIER PUB. CO., Lynn, Mass. P. O. Box 309.

SMOKELESS POWDER AND MAGAzine Rifles.—By L. G. Duff Grant. An interesting paper on the various smokeless powders for military purposes now in existence, and the weapons mostly used therewith. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **892** and **893.** Price 10 cents each. To be had at this office and from all newsdealers.

Notice to Architects.

The Board of Trustees of Georgia Lunatic Asylum invite Architects to submit plans, by April 26, 1894, for one large building, two annex buildings, and a congregate dining room, to be constructed at Asylum grounds, near Milledgeville, Georgia. Architects can obtain all necessary information by writing for circular. Address DR. T. O. POWELL, Lunatic Asylum, Milledgeville, Ga.

COMPETITION DEFIED A new business specialty of great merit and universal demand. **PATENT FOR SALE.** Address E. R. BEACH, 40 Wall Street, New York.

MONEY IN SPRING CHICKENS.

The Hen Is Not In It.

The invincible egg hatcher does the business. Price, $17.00. Big money. Send 4 cts. for Catalogue No. 46. It tells all. 2600 sold in 1893.

BUCKEYE INCUBATOR CO., Springfield, Ohio.

THE MODERN ICE YACHT.— BY Geo. W. Polk. A new and valuable paper, containing full, practical directions and specifications for the construction of the fastest and best kinds of Ice Yachts of the latest, most approved forms. Illustrated with engravings drawn to scale, showing the form, position, and arrangement of all the parts. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **624.** Price 10 cents. To be had at this office and of all newsdealers.

The Improved Monitor Incubator.



Hundreds of testimonials as to its merits over all other makes. **MEDALS and DIPLOMA AWARDED AT THE WORLD'S FAIR.** Large book with cuts for stamp. **BUY THE BEST.**

A. F. WILLIAMS, 61 RACE ST., BRISTOL, CONN.

Rubber Rolls and Wheels.

Power Wringing Machines, Drying and Ventilating Fans. All styles of Trucks made to order. Catalogues free. **GEORGE P. CLARK,**
Box L. Windsor Locks, Conn.

VOLNEY W. MASON & CO.
FRICTION PULLEYS, CLUTCHES, and ELEVATORS
PROVIDENCE, R. I.

INVENTORS Write us. We have perfect facilities for producing their Models and manufacturing their Electrical and Mechanical Specialties. SOUTHERN ENGINEERING CO., Electrical and Mechanical Engineers, Louisville, Ky.

THE "MUNSON" TYPEWRITER.

This machine is an "evolution," the outgrowth of years of experience and the best results of scientific work. Its principles appeal at once to the educated mechanic. It is **Light, Small, Compact, Easily operated,** with **Universal Key Board.**

INTERCHANGEABLE STEEL TYPE WHEEL,

durable and easily kept in order. 30 keys, 90 characters. Weight, with carrying case, 16 pounds. Special wheels for different languages. *Send for circular to*

* * **THE MUNSON TYPEWRITER CO.,** * *
162 S. La Salle Street, Chicago, Ill., U. S. A.

HE IS DEAD

To his own interest, who deals in Arms and Ammunition, or who shoots a Rifle, Pistol, or Shot Gun and has not a copy of IDEAL HAND BOOK, No. 4, A 80 pages of solid information. Just out. (Mention Scientific American.) BE ALIVE and send for one FREE to all countries. Send stamps for postage. **IDEAL MF'G. CO.,** Drawer 860, **New Haven, Ct., U. S. A.**

A New and Valuable Book.

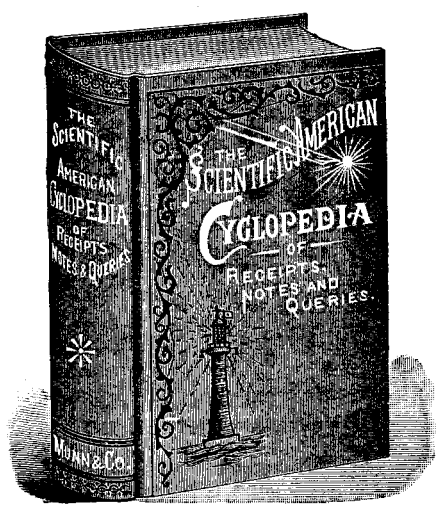

12,500 Receipts. 708 Pages. Price $5.
Bound in Sheep, **$6.** *Half-Morocco,* **$6.50.**

This splendid work contains a careful compilation of the most useful Receipts and Replies given in the Notes and Queries of correspondents as published in the **Scientific American** during the past fifty years; together with many valuable and important additions.

Over Twelve Thousand selected Receipts are here collected; nearly every branch of the useful arts being represented. It is by far the most comprehensive volume of the kind ever placed before the public.

The work may be regarded as the product of the studies and practical experience of the ablest chemists and workers in all parts of the world; the information given being of the highest value, arranged and condensed in concise form convenient for ready use.

Almost every inquiry that can be thought of, relating to formulæ used in the various manufacturing industries, will here be found answered.

Instructions for working many different processes in the arts are given.

Those who are engaged in any branch of industry probably will find in this book much that is of practical value in their respective callings.

Those who are in search of independent business or employment, relating to the home manufacture of sample articles, will find in it hundreds of most excellent suggestions.

☞ *Send for Descriptive Circular.*

MUNN & CO., Publishers,
SCIENTIFIC AMERICAN OFFICE,
361 Broadway, New York.

THE LINK-BELT COMPANIES,
PHILADELPHIA. NEW YORK. CHICAGO.

Originators of the best practice in the use of Link-Belting of standard designs.
Ewart Link-Belting (31 regular sizes).
Sprocket Wheels, Rope Transmissions
Fibre-Graphite Self-Lubricant Journal Bearings.
Machinery for elevating and conveying any material.

Philadelphia address, 2020 Hunting Park Av.

LOCOMOTIVE PHOTOGRAPHS—The la collection in the world. British, American, French, ian, etc., railways. For list and prices, address F. Mo 1 Canning Crescent, Wood Green, London, N, Engla

---



The McCONNELL Germ Proof Filter

REMOVE MICROBES
—AND—
All Kinds of Disease Germs.
Is a Filter and Cooler Combined
The ice as it melts is filtered
No other gravity filter
The McConnell Filter

POLAR ELECTRIC. BUFFALO.

Parsons Horological Institute.

Learn the Watch Trade

Engraving and Jewelry Work.

PARSONS, IDE & CO. ☞ *Circular free.*
302 Bradley Ave., PEORIA, ILL.

HYPNOTISM: its Uses and Abuses. The science easily acquired. Illustrated book, just out, $1.00. Address PROF. ANDERSON, S. A. 2., 182 State St., CHICAGO.



WOODEN TANKS. FOR RAILROADS, WATER WORKS, MILLS, FARMS, &c. COMPLETE STOCK OF CYPRESS LUMBER.
LARGE WATER TANKS PLANS & ESTIMATES A SPECIALTY. SPECIFICATIONS FURNISHED FOR FOUNDATIONS & TOWERS.
W. E. CALDWELL CO.
No. 217 E. MAIN ST. LOUISVILLE, KY.

The Scientific American

PUBLICATIONS FOR 1894.

The prices of the different publications in the United States, Canada, and Mexico are as follows:

RATES BY MAIL.

The Scientific American (weekly), one year	$3.00
The Scientific American Supplement (weekly), one year	5.00
The Scientific American, Spanish Edition (monthly), one year	3.00
The Scientific American Architects and Builders Edition (monthly), one year	2.50

COMBINED RATES.

The Scientific American and Supplement	$7.00
The Scientific American and Architects and Builders Edition	5.00
The Scientific American, Supplement, and Architects and Builders Edition	9.00

Proportionate Rates for Six Months.

This includes postage, which we pay. Remit by postal or express money order, or draft to order of

MUNN & CO., 361 Broadway, New York.

© 1894 SCIENTIFIC AMERICAN, INC.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion, - 75 cents a line
Back Page, each insertion, - - $1.00 a line

☞ *For some classes of Advertisements, Special and Higher rates are required.*

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

Victors Lead the World



OVERMAN WHEEL CO.

BOSTON. NEW YORK. PHILADELPHIA. CHICAGO. DETROIT. SAN FRANCISCO. DENVER.

COLD FORGED PRODUCT.

Forged Wood Screw



Patented May 10, July 19, 1887; Oct. 29, 1889; Aug. 19, Oct. 21, 1890; April 7 May 12, 1891; July 19, 1892.

Its Advantages are:

1. Stronger than a common screw.
2. Uniform and wide slot.
3. Requires the use of but one bit in hard wood.
4. Inserted easier.
5. Centralized point.
6. Superior holding power.
7. The screw being **Cold Forged**, instead of **Cut**, leaves on its entire surface a metallic skin.

☞ Send for samples to

AMERICAN SCREW CO.
PROVIDENCE, R. I.

ROPER'S PRACTICAL HAND BOOKS FOR ENGINEERS AND FIREMEN.
By STEPHEN ROPER, Engineer.
USE and ABUSE of the STEAM BOILER.
Containing illustrations and descriptions of all classes of Steam Boilers, with instructions how to set up, fire, and manage the same. Price, postpaid.....**$2.00**
Descriptive Catalogue mailed free.
EDWARD MEEKS, Publisher,
1312 Filbert Street, Philadelphia.

WATER MOTOR, $5.
BOLCIANO'S LITTLE GIANT
WILL RUN YOUR
SEWING MACHINE
and other Light Machinery.
A week's work done in a day.
No Plumbing Required.
Delivered free on receipt of price.

Patented April 25, 1893.

Pittsburg, Pa., Jan. 23, 1894.—The Bolciano W. M. Co. Dear Sirs: I have given your Motor No. 1 rather a hard test by running a wood lathe 5 ft. long, and must say it was a grand success. Yours, W. J. Carley.

THE BOLCIANO WATER MOTOR CO.
414 Water Street, Baltimore, Md.

The American Bell Telephone Company,

125 Milk Street, Boston, Mass.

This Company owns Letters-Patent No. 463,569, granted to Emile Berliner November 17, 1891, for a combined Telegraph and Telephone, and controls Letters-Patent No. 474,231, granted to Thomas A. Edison May 3, 1892, for a Speaking Telegraph, which Patents cover fundamental inventions and embrace all forms of microphone transmitters and of carbon telephones.

DERBY Roll-Top Office DESKS

Library Tables
Ball-Bearing Chairs
Office Furniture Specialties.

Derby, Kilmer & Pond Desk Co.
95 Causeway St., Boston.

Send 4 2-cent stamps for 36-page illustrated catalogue.

International Exhibition
—OF—
Industry, Science, and Art
1894-5. HOBART, TASMANIA (AUSTRALIA).

Under the Immediate Patronage of the Government of Tasmania.

SOLE OFFICIAL AGENTS FOR THE UNITED STATES OF AMERICA:

Messrs. WOLTMANN, KEITH & CO., No. 11 Wall Street, New York,

to whom all communications should be addressed, and who will furnish information to intending exhibitors, secure space, and undertake the reception and direction of exhibits, and sale or return of goods in connection with the

TASMANIAN INTERNATIONAL EXHIBITION.

Applications for Space Must be made Before May 1, 1894.

KODAKS $6.00 TO $100.00

Eastman Kodak Company,

{Send for Catalogue.} Rochester, N. Y.

1¼ to 50 H. P. **THE Motor of 19th Century**



PIONEER in Use of Gasoline.
Started at the Head and HAS REMAINED THERE.
Unequaled in Simplicity, Economy, Reliability, and Power.
For circulars, etc., address
Charter Gas Engine Co., P. O. Box 148, Sterling, Ill.

THE BERING SEA FISHERIES.—An interesting paper on the habits of the fur seal, the localities in the North Pacific inhabited by the animal and the method of hunting and slaughtering it. With 5 illustrations and a map. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **919**. Price 10 cents. To be had at this office and from all newsdealers.

GASOLINE ENGINES.
Stationary & Portable



ALL SIZES.
Dwarfs in size and Giants in Strength.
Costs only 10 cents a Day per H. P. to run them, & scarcely any attention.
EVERY ENGINE GUARANTEED
Write for particulars and testimonials.
THE VANDUZEN GAS & GASOLINE ENGINE CO.
CINCINNATI, O.
Mention this paper when you write.

HARTFORD STEAM BOILER INSPECTION AND INSURANCE CO.
HARTFORD, CONN.



Scientific Book Catalogue

RECENTLY PUBLISHED.

Our new catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.
MUNN & CO., Publishers Scientific American,
361 Broadway, New York.



SCIENTIFIC AMERICAN SUPPLEMENT. Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. Also to be had of newsdealers in all parts of the country.

H. W. JOHNS M'F'G CO.,
ASBESTOS
ROOFING, LIQUID PAINTS, ASBESTOS MANUFACTURES, NON-CONDUCTING AND INSULATING MATERIALS,
87 MAIDEN LANE, NEW YORK.
Jersey City. Chicago. Philadelphia. Boston.

MESSRS. MUNN & Co., Solicitors of Patents, have had nearly fifty years' continuous experience. Any one may quickly ascertain, free, whether an invention probably is patentable by writing to Munn & Co. Communications strictly confidential. A handbook of patents and how to obtain them sent free.

PATENTS

taken through Munn & Co. receive special notice in the *Scientific American*. This splendid weekly paper, elegantly illustrated, has the largest circulation of any scientific work. $3 a year. Specimen copies free.
Address MUNN & CO.,
New York, 361 Broadway.

At ¼ Price

Goldand Silver Watches, Bicycles, Tricycles, Guns and Pistols, Carts, Buggies, Wagons, Carriages Safes, Sleighs, Harness, Cart Tops, Skids,

Sewing Machines,	Accordeons,	Organs,	Pianos,	Cider Mills,
Cash Drawers,	Feed Mills,	Stoves,	Kettles,	Bone Mills,
Letter Presses,	Jack Screws,	Trucks,	Anvils,	HayCutters,
Press Stands,	Copy Books,	Vises,	Drills,	Road Plows,
Lawn Mowers,	Coffee Mills,	Lathes,	Benders,	DumpCarts,
Corn Shellers,	Hand Carts,	Forges,	Scrapers,	Wire Fence,
Fanning Mills,	Wringers,	Engines,	Saws,	Steel Sinks,
Grain Dumps,	Crow Bars,	Boilers,	Tools,	Bit Braces,

Hay, Stock, Elevator, Railroad, Platform and Counter SCALES.
Send for free Catalogue and see how to save Money.
151 So. Jefferson St., CHICAGO SCALE CO., Chicago, Ill.



"OTTO"
GAS AND GASOLINE ENGINES.
½ to 100 h. p. Can be used in cities or in country independent of gas works or gas machines.
No Boiler, No Danger, No Engineer.
OVER **30,000 SOLD.**
OTTO GAS ENGINE WORKS, PHILADELPHIA.



Stereopticons
Lantern Slides - -
This Season's Specialty.
World's Fair Lantern Slides.
☞ *Write for Catalogue M.*
McINTOSH BATTERY & OPTICAL CO., Chicago.

VELOCITY OF ICE BOATS. A COLlection of interesting letters to the editor of the SCIENTIFIC AMERICAN on the question of the speed of ice boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory diagrams. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **214**. Price 10 cents. To be had at this office and from all newsdealers.

POWER PRESSES
For Punching, Drawing, and Stamping Sheet Metal Goods of Every Description.
Roll Feeds, Dial Feeds, and Die Work to order.
☞ *Send for illus. descriptive circulars.*
The Coulter & McKenzie Mach. Co.
500 Water St., BRIDGEPORT, CONN.

AGENTS WANTED WRITE FOR CATALOGUE AND AGENCY. FOR FINE TOOLS IN EVERY SHOP.
C. H. BESLY & CO.
CHICAGO, ILL. U.S.A.

MANUFACTURE OF BICYCLES.—A very comprehensive article giving the details of construction of every part of these vehicles. With 15 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **908**. Price 10 cents. To be had at this office and from all newsdealers.

ASTRONOMY
Made easy and interesting with the help of our new
Celestial Planisphere and Handbook.
For descriptive circular, address
POOLE BROS., Chicago, Ill.

MALLEABLE AND FINE GRAY IRON ALSO STEEL CASTINGS FROM SPECIAL PATTERNS
THOMAS DEVLIN & CO. FINE TINNING, JAPANNING AND FINISHING
LEHIGH AVE & AMERICAN ST. PHILA.

ARC ✳ & ✳ INCANDESCENT ✳ LIGHTING
ARC LAMPS. INCANDESCENT LAMPS, ALL LIGHTING SUPPLIES.
Miniature Lamps for Decorative Purposes. Highest Awards at the World's Fair.
GENERAL ELECTRIC COMPANY,
PRINCIPAL SALES OFFICES.

44 Broad Street.....New York.	620 Atlantic Avenue.....Boston, Mass.
173 and 175 Adams Street.....Chicago, Ill.	509 Arch Street.....Philadelphia, Pa.
Fifth and Race Streets.....Cincinnati, O.	401-407 Sibley Street.....St. Paul, Minn.
Equitable Building.....Atlanta, Ga.	1333 F Street, N. W.....Washington, D. C.
15 First Street.....San Francisco, Cal.	Masonic Temple.....Denver, Col.

MAIN OFFICE, SCHENECTADY, N. Y.
All business outside the U. S. transacted by Thomson-Houston International Electric Co. 44 Broad St. New York

---

ENGINES, BOILERS & MACHINE TOOLS. Complete outfits furnished. *Send for prices and Catalogue "B."* W. P. DAVIS, Rochester, N. Y.

ALUMINUM goods made in quantity at low price. H. H. Franklin Mfg. Co., Syracuse, N.Y

WELL MACHINERY Largest Works on Earth.
All kinds of Well Tools. A fortune for the driller Boring Wells or Prospecting with Adamantine. Can take a core. A wonderful discovery of lifting water by air. Economical two-stroke Artesian pumping outfits. 448 page Encyclopedia 25 cents.
American Well Works, AURORA, ILL., CHICAGO, ILL., DALLAS, TEX.

OIL WELL SUPPLY CO.
91 & 92 WATER STREET, PITTSBURG, PA.
Manufacturers of everything needed for
ARTESIAN WELLS
for either Gas, Oil, Water, or Mineral Tests
Boilers, Engines, Pipe, Cordage, Drilling Tools, etc. *Illustrated catalogue, price lists, and discount sheets on request.*

IMPROVED TROLLEY SYSTEM.—DEscription of an improved overhead system of electric traction recently adopted by the South Staffordshire Tramway Company. With 9 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **886**. Price 10 cents. To be had at this office and from all newsdealers. The same number contains a description (with 2 illustrations) of a new electric tramway at Paris, and also a description of Siemens & Halske's electric railway conduit, with 3 illustrations.

THE "CLIMAX"
Stereotyper and Moulding Press



combined, for making perfect **Celluloid Stereotypes** to be used in place of metal stereotypes. Also for making **Rubber Stamps.** Should be in use in every printing office.
See SCI. AM., Dec. 30, 1893. Send for circular to
THE J. F. W. DORMAN CO.
217 E. German St.,
Baltimore, Md.
Manufacturers of Rubber Stamps, Vulcanizers, Stereotype Machinery and Supplies.

THE SCIENTIFIC AMERICAN

☞ **ESTABLISHED 1845.**

The Most Popular Scientific Paper in the World
Only $3.00 a Year, Including Postage.
Weekly—52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete list of patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States, Canada, or Mexico, on receipt of **three dollars** by the publishers; six months, $1.50: three months, $1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's **risk.** Address all letters and make all orders, drafts, etc., payable to
MUNN & CO., 361 Broadway, New York.

THE Scientific American Supplement

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archæology, Astronomy Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States, Canada, and Mexico, $5.00 a year; or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year to one address for $7.00. Single copies, 10 cents. Address and remit by postal order, express money order, or check.
MUNN & CO., 361 Broadway, New York.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. $2.50 a year. Single copies, 25 cents. Thirty-two large quarto pages, forming a large and splendid Magazine of Architecture, richly adorned with *elegant plates in colors*, and with other fine engravings; illustrating the most interesting examples of modern architectural construction and allied subjects.

A special feature is the presentation in ... number of a variety of the latest and ... dences, city and country ... erate cost as well as ... perspective and ... Descriptions ...

The elegance ... have won for ... Architectural ... dealers. $2.50 ...

PRINTING INK, The SCIENTIFIC ... ENEU JOHNSON ... Sts., Philadelphia ... and 47 Rose St., ...

© 1894 SCIENTIFIC AMERICAN, INC.